

## Kinetix 5700 DC-bus Link Kits

Catalog Numbers 2198-BARCON-55DC200, 2198-BARCON-85DC200, 2198-BARCON-100DC200, 2198-BARCON-165DC200, 2198-BARCON-220DC200, 2198-BARCON-275DC200, 2198-BARCON-440DC200, 2198-KITCON-ENDCAP200

The Kinetix® 5700 DC-bus link kits are used to extend DC-bus power from drive-to-drive in DC-bus multi-axis configurations. DC-bus links are rated for 208 A, maximum bus-bar current.

### Summary of Changes

Topic	Page
<ul style="list-style-type: none"> <li>Added 2198-Dxxx-ERS4 and 2198-Sxxx-ERS4 servo drive catalog numbers. However, when the Kinetix 5700 inverter catalog number ends in -ERSx, for example 2198-D057-ERSx, the variable (x) indicates that the inverter catalog number (by using this example) can be 2198-D057-ERS3 or 2198-D057-ERS4.</li> <li>Updated the DC-bus link maximum bus-bar current.</li> </ul>	Throughout
Added DC-bus link kit catalog numbers to the table in support of the Kinetix 5700 regenerative bus supply.	1
Added the iTRAK® power supply catalog number (2198-W25K-ER) to the table.	
Corrected the DC-bus end cap catalog number.	

## DC-bus Link Kit Applications

DC-bus Link Kit Cat. No.	Kinetix 5700 Drive Module Type	Kinetix 5700 Drive Module Cat. No.	Description	
2198-BARCON-55DC200	Dual-axis inverter	<ul style="list-style-type: none"> <li>2198-D006-ERSx</li> <li>2198-D012-ERSx</li> </ul>	DC-bus link, 55 mm, 208 A	
2198-BARCON-85DC200 <sup>(1)</sup>	Dual-axis inverter	2198-D057-ERSx	DC-bus link, 85 mm, 208 A	
	Single-axis inverter	<ul style="list-style-type: none"> <li>2198-S086-ERSx</li> <li>2198-S130-ERSx</li> </ul>		
2198-BARCON-100DC200	Single-axis inverter	2198-S160-ERSx	DC-bus link, 100 mm, 208 A	
	iTRAK power supply	2198-W25K-ER		
2198-BARCON-165DC200	Regenerative Bus Supply	2198-RP088	DC-bus link, 165 mm, 208 A	
2198-BARCON-275DC200		2198-RP200	DC-bus link, 275 mm, 208 A	
2198-BARCON-440DC200		<ul style="list-style-type: none"> <li>2198-RP263</li> <li>2198-RP312</li> </ul>	DC-bus link, 440 mm, 208 A	
2198-BARCON-220DC200	Single-axis inverter	<ul style="list-style-type: none"> <li>2198-S263-ERSx</li> <li>2198-S312-ERSx</li> </ul>	DC-bus link, 220 mm, 208 A	
2198-KITCON-ENDCAP200	DC-bus supply	<ul style="list-style-type: none"> <li>2198-P031</li> <li>2198-P070</li> <li>2198-P141</li> <li>2198-P208</li> </ul>	<ul style="list-style-type: none"> <li>2198-RP088</li> <li>2198-RP200</li> <li>2198-RP263</li> <li>2198-RP312</li> </ul>	DC-bus end caps, 208 A

(1) When two or three 2198-P208 DC-bus supplies are connected in parallel, one 85 mm DC-bus link is required for each additional power supply.

See the Kinetix 5700 Servo Drives User Manual, publication [2198-UM002](#), for detailed information on wiring, applying power, troubleshooting, and integration with Logix 5000™ controllers.

# Install the DC-bus Links




**ATTENTION:** To avoid hazard of electrical shock, perform all mounting and wiring of the Kinetix 5700 drives and DC-bus link kits before applying power. Once power is applied, connector terminals can have voltage present even when not in use.

**IMPORTANT** When the shared-bus connection system is used, the zero-stack tab and cutout must be engaged between adjacent drive modules.

The DC-bus connection system is comprised of two components:

- DC-bus links that are inserted between drive modules to extend the DC bus from drive to drive
- DC-bus end caps that are inserted into the first and last drive modules to cover the exposed DC-bus connector on both ends of the bus

This example configuration illustrates the shared DC-bus connection system and consists of one 2198-P208 DC-bus power supply, one 2198-S160-ERSx single-axis inverter, one 2198-S086-ERSx single-axis inverter, and one 2198-D006-ERSx dual-axis inverter.

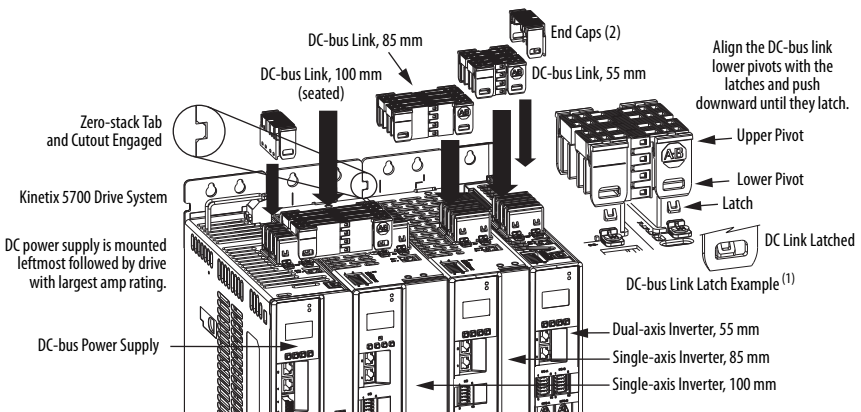

(1) DC-bus links latch on both sides when inserted into the DC-bus connectors. To remove the DC-bus link, verify that there is no bus voltage present, depress both sets of upper pivots to unlatch the lower pivots, and hold the DC-bus link firmly while pulling upward.

Rockwell Automation maintains current product environmental information on its website at <http://www.rockwellautomation.com/rockwellautomation/about-us/sustainability-ethics/product-environmental-compliance.page>.

Allen-Bradley, iTRAK, Kinetix, Logix 5000, Rockwell Automation, and Rockwell Software are trademarks of Rockwell Automation, Inc. Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Otomasyon Ticaret A.Ş., Kar Plaza İş Merkezi E Blok Kat:6 34752 İçerenköy, İstanbul, Tel: +90 (216) 5698400

[www.rockwellautomation.com](http://www.rockwellautomation.com)

## Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444  
Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640  
Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Publication 2198-IN007C-EN-P - October 2018

Supersedes Publication 2198-IN007B-EN-P - May 2018

Copyright © 2018 Rockwell Automation, Inc. All rights reserved. Printed in the U.S.A.