

Aluminum and Copper Lugs

Bornes de alimentación y cuerpo múltiples

Bornes de répartition AL / CU

	U.S. Cat. No.	Euro Order No.
Item:	TC3MG500	3VL9650-4TG11
	TA3MG500	3VL9650-4TG01
	TA2MG750	3VL9675-4TF01
	_TA2MG750	3VL9675-4TF_1
	_TA3MG500	3VL9650-4TG_1
	_TA3MG600	3VL9660-4TG_1

For Use With Frame MG
Para Usar Con Caja Base MG






Installation Instructions / Instructivo de Instalación

	 Danger	 Peligro	 Danger
	Hazardous Voltage. Will cause death or serious injury.	Tensión peligrosa. Puede causar la muerte o lesiones graves.	Tension dangereuse. Danger de mort ou risque de blessures graves.
	Turn off and lock out all power supplying this device before working on this device. Replace all covers before power supplying this device is turned on.	Desenergice totalmente antes de instalar o darle servicio. Reemplace todas las barreras y cubiertas antes de energizar el interruptor.	Couper l'alimentation de l'appareil et barrer avant de travailler. Remplacez tous les couverts avant que l'alprovisionnement de pouvoir soit alimenté.

Use only with Siemens certified Components.

Utilizar únicamente con componentes certificados de Siemens.






A utiliser uniquement avec les composants certifiés Siemens.

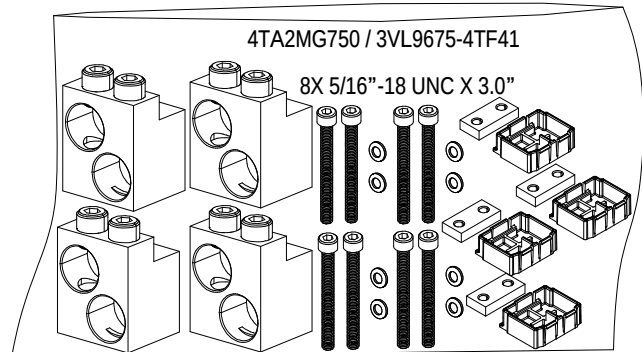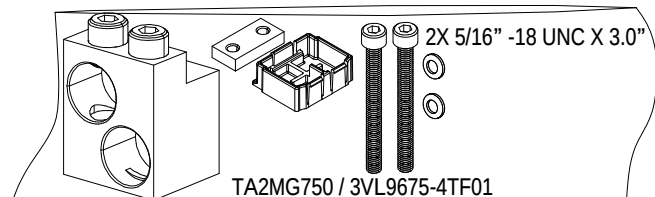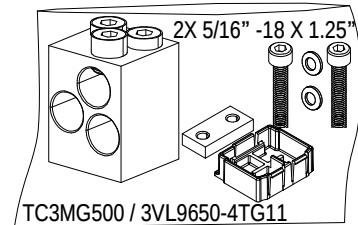
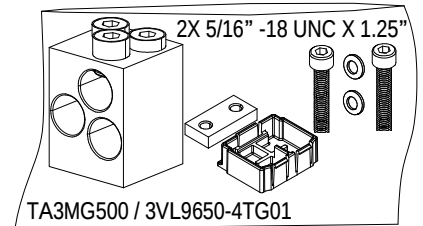
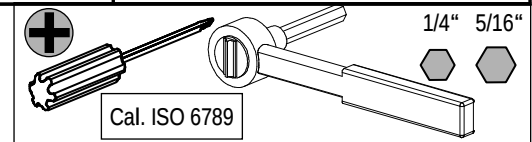


NOTE - These instructions do not purport to cover all details or variations in equipment, or to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise, which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the local Siemens sales office. The contents of this instruction manual shall not become part of or modify any prior or existing agreement, commitment or relationship. The sales contract contains the entire obligation of Siemens. The warranty contained in the contract between the parties is the sole warranty of Siemens. Any statements contained herein do not create new warranties or modify the existing warranty.

Trademarks - Unless otherwise noted, all names identified by ® are registered trademarks of Siemens AG or Siemens Industry, Inc.


The remaining trademarks in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owner.

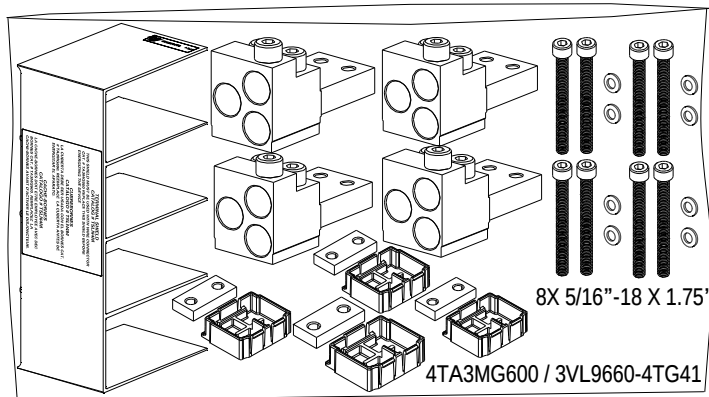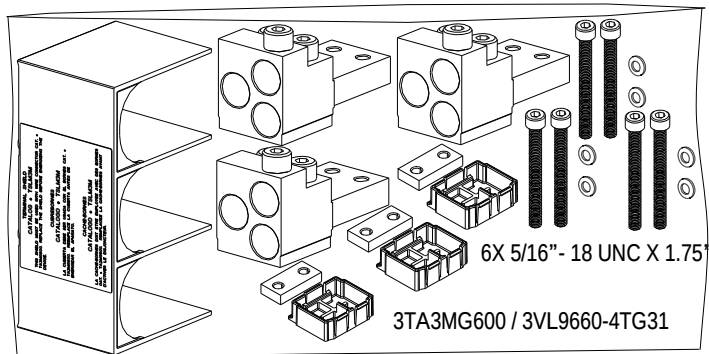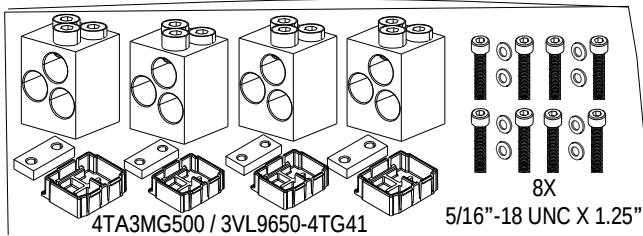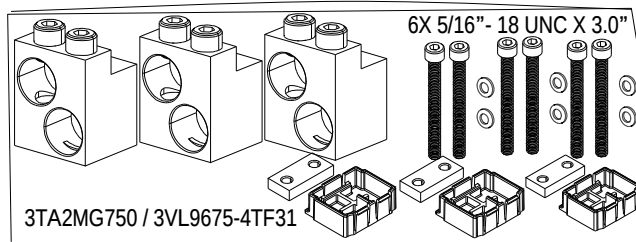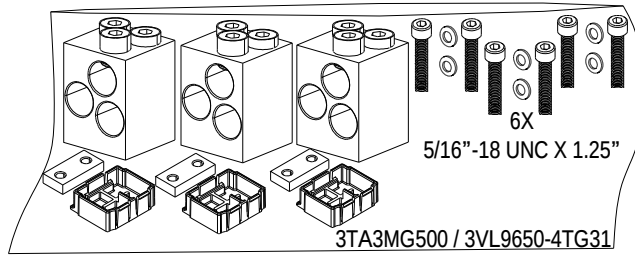

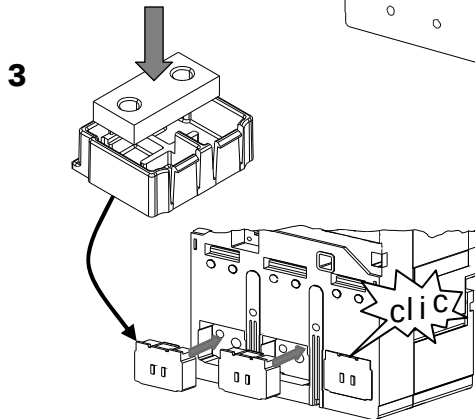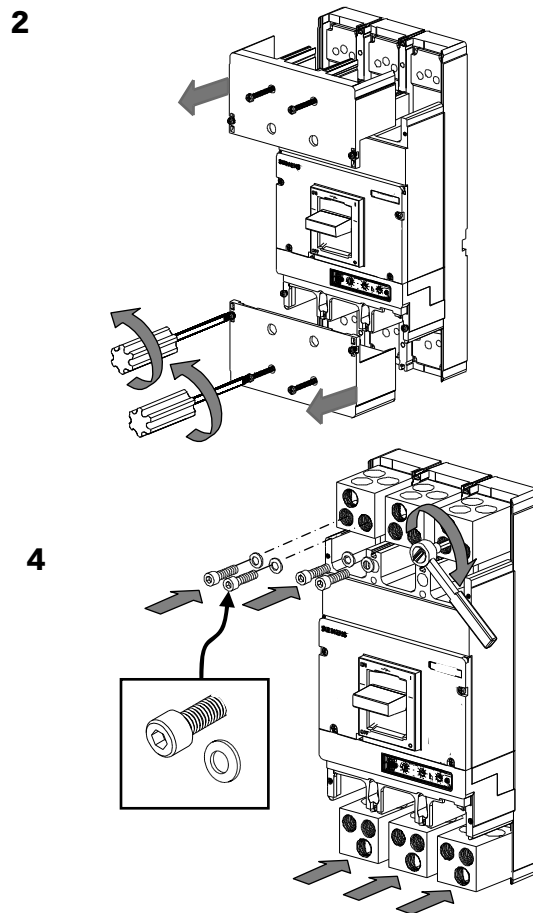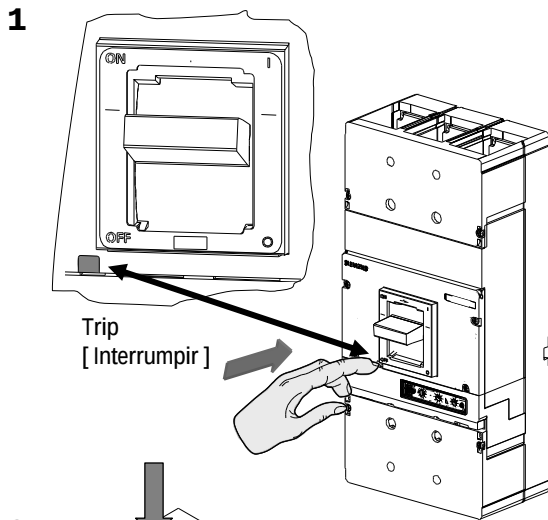

5

Wire Connector [Conexión del cable]	Wire Size [Rango Cable]	UL 486A - 486B Req. Wire Stranding (Cable)		Torque [esfuerzo de torsión]	Wire Strip Length [Quitar]	
		CU / AL Class B	CU Class C		A	B
 TC3MG500 / 3VL9650-4TG11	Cu Only 1/0 – 4 / 0 kcmil [70 – 95 mm ²]	19	37	375 lb.in. [42.4 Nm]	1.0" [25.4 mm]	2.0" [50.8 mm]
	Cu Only 250 – 500 kcmil [120 – 240 mm ²]	37	61			
 TA3MG500 / 3VL9650-4TG01 3TA3MG500 / 3VL9650-4TG31 4TA3MG500 / 3VL9650-4TG41	Cu / Al 1/0 – 4 / 0 kcmil [70– 95 mm ²]	19	37	375 lb.in. [42.4 Nm]	1.0" [25.4 mm]	2.0" [50.8 mm]
	Cu / Al 250 – 500 kcmil [120 – 240 mm ²]	37	61			
 TA2MG750 / 3VL9675-4TF01 3TA2MG750 / 3VL9675-4TF31 4TA2MG750 / 3VL9675-4TF41	Cu / Al 500 kcmil [240 mm ²]	37	61	375 lb.in. [42.4 Nm]	1.0" [25.4 mm]	-----
	Cu / Al 750 kcmil [300 mm ²]	61	91			
 3TA3MG600 / 3VL9660-4TG31 4TA3MG600 / 3VL9660-4TG41	Cu / Al 2 AWG [35 mm ²]	7	19	375 lb.in. [42.4 Nm]	1.0" [25.4 mm]	2.0" [50.8 mm]
	Cu / Al 1 - 4/0 – AWG [50-95 mm ²]	19	37			
	Cu / Al 250-500 kcmil [120-240mm ²]	37	61			
	Cu / Al 600 kcmil [240-300 mm ²]	61	91			

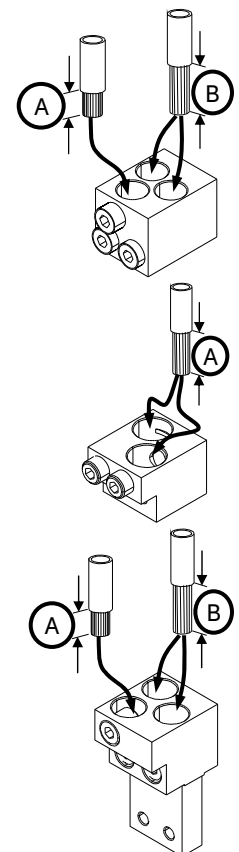



Danger

Hazardous Voltage.
Will cause death or serious injury.

Turn off and lock out all power supplying this device before working on this device.
Replace all covers before power supplying this device is turned on.

Peligro

Tensión peligrosa.
Puede causar la muerte o lesiones graves.


Desenergice totalmente antes de instalar o darle servicio.
Reemplace todas las barreras y cubiertas antes de energizar el interruptor.

Danger


Tension dangereuse.
Danger de mort ou risque de blessures graves.

Couper l'alimentation de l'appareil et barrer avant de travailler.
Remplacez tous les couverts avant que l'approvisionnement de pouvoir soit alimenté.


6

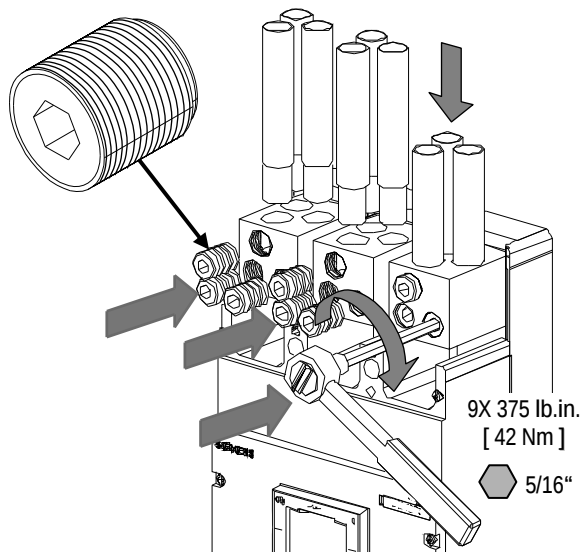

7


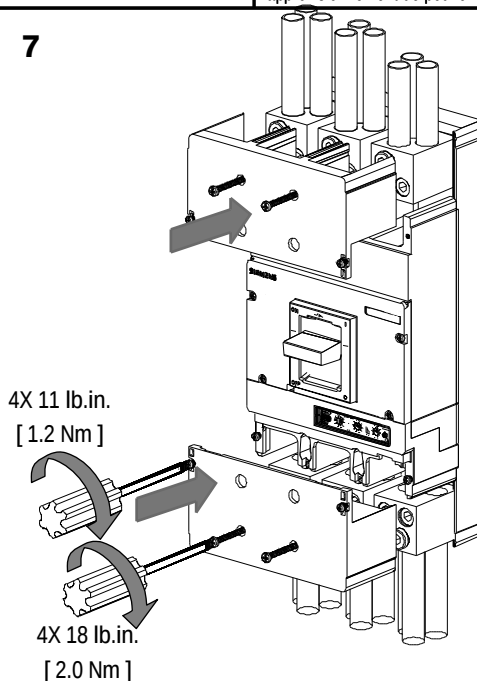


8

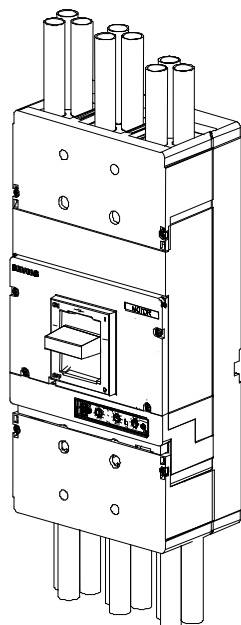

3TA3MG600 / 3VL9660-4TG31
4TA3MG600 / 3VL9660-4TG41

ONLY
[SOLAMENTE]

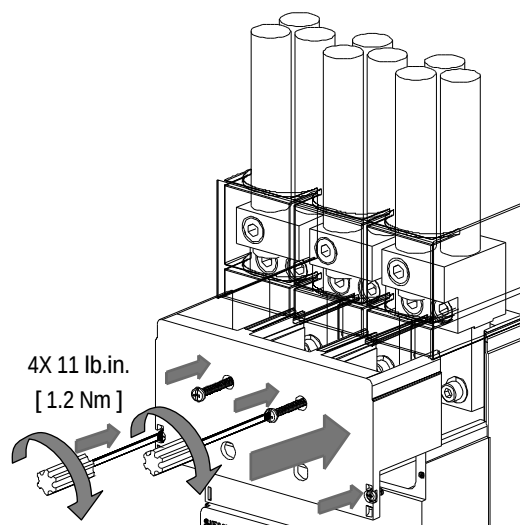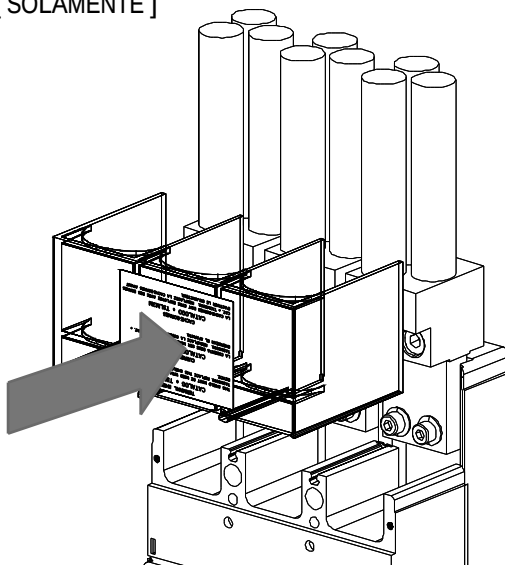

For Support in Europe refer to :

Bestell-Nr. / Order No.: 3ZX1012-0VL68-5AA5

Internet: www.siemens.de/lowvoltage/technical-assistance

GWA-4NEB-179-6876-10-DS-07

Technical Support:

Toll Free: 1-800-241-4453

Internet: www.usa.siemens.com/powerdistribution

Subject to change without prior notice
Siemens Industry, Inc., Norcross, GA 30092 U.S.A.