

LEDVANCE T8 59W INSTANT START UNV

120-277 Voltage High Efficiency Ballast

Lamp/Ballast Guide

2 Lamp 59W T8 8-Foot UNV
ISN and ISL

Primary lamp: F096T8 (59W)

Also operates:

F096T8SS (54W & 50W), F072T8 and
F048T8

Scan or click QR code to access TLED
Ballast Compatibility Listing



Application Information

These LEDVANCE High Efficiency
ballasts are ideally suited for:

- Commercial and Industrial
- Hospitality and Institutional
- Retail and Office
- Maintenance Replacement



Ordering Information


Item Number	Description	# of Lamps	Primary Lamp (W)	Lamp Family	Line Voltage	Starting Method	Ballast Factor	Case Size	Packaging
75879	LHE2X59T8UNVISNSCB	2	59	T8	UNV	IS	N	Small	10/CS 1/SKU
75894	LHE2X59T8UNVISLSC	2	59	T8	UNV	IS	L	Small	10/CS 1/SKU

Electrical Specifications at 120-277V

Item Number	Description	Input Current (AMPS)	Lamp Type	Rated Lumens (lm)	# of Lamps	Ballast Factor (BF)	System Lumens	Mean Lumens	Input Power (W)	System Efficacy (lm/W)	BEF
High Efficiency Normal Ballast Factor (0.88)											
75879	LHE2X59T8UNVISNSCB	0.92	F096	6200	2	0.88	10530	9530	107	94	0.82
High Efficiency Normal Ballast Factor (0.77)											
75894	LHE2X59T8UNVISLSC	0.80/0.34	F096	5700	2	0.77	8780	7900	95/94	92/93	0.82

*Ballast Efficiency Factor (BEF) shown = (Ballast Factor x 100) divided by Input Power
277V 60Hz data

Wiring Diagram

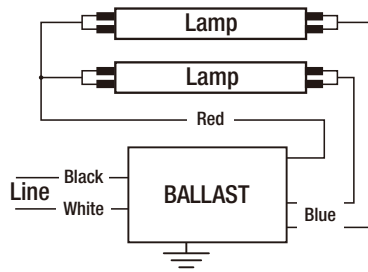

For one lamp operation, cap any blue lead.

Dimensions:

Enclosure size:

Overall: 9.5"L x 1.3"W x 1.1"H | 241 x 33 x 28mm

Mounting: 8.9" | 226mm

Weight: 1.10 lbs. each (approx.)

Leads only, no connectors provided.

Leads length:

White, Black 25" (+/-1")

Red 79" (+/-1")


Blue 46" (+/-1")

Packaging:


Quantity: 10 per Case, 1 per SKU

Weight: 11.3 lbs. per case (approx.)

Notes: Leads only. No connectors provided.

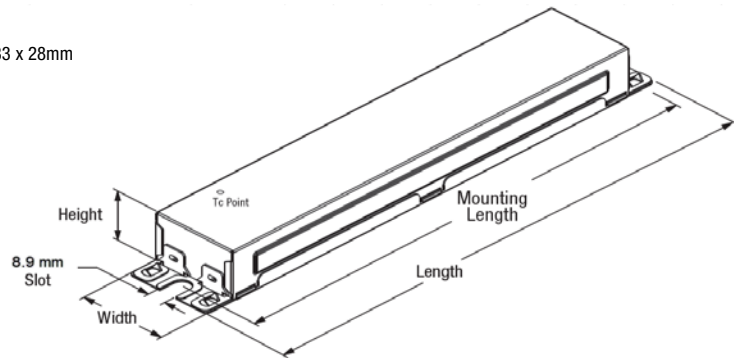

Ordering Guide

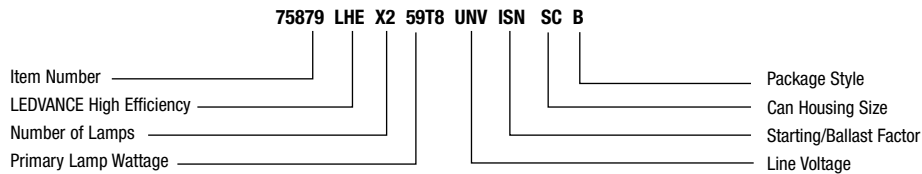

LEDVANCE LLC

181 Ballardvale Street, Suite 203

Wilmington, MA 01887 USA

Phone 1-800-LIGHTBULB (1-800-544-4828)

www.ledvanceUS.com

LEDVANCE is a registered trademark.
All other trademarks are those of their respective owners.
Specifications subject to change without notice.



SCAN TO FOLLOW US
ON SOCIAL MEDIA

© 2025 LEDVANCE LLC

2 of 2

Specification Data

Type

Catalog #

Project

Comments

Prepared by

Performance Guide

Data based on fluorescent lamps listed. LHE Instant Start ballast is also compatible with other lamp manufacturer's equivalent lamp types that meet ANSI specifications.

Specifications

Input voltage: 120-277V

Starting Method: Instant Start

Ballast Factor: 0.88 (NAED 75879)

0.77 (NAED 75894)

Circuit Type: Parallel

Lamp Frequency: >42 kHz

Input Frequency: 50/60 Hz

Low THD: <10%

Power Factor: ≥98%

Lamp CCF: < 1.7

Voltage Range: ±10% of Rated Input of 120-277V
rated line (108-305V)

Operating Temperatures¹

Starting Temperature: 32°F (0°C)

Case Temp: 194°F (90°C) Max

Max Ambient Temp.: 131°F (55°C)

Product Ratings

UL Listed Class P, Type 1, Outdoor

FCC Part 18 Non-Consumer

Class A Sound Rating

ANSI C62.41 Cat. A Transient Protection

RoHS Compliant², NRCAN cert.

No PCBs.

Type HL

OCV 1000V

¹ Operation below 50°F (10°C) may affect light output or lamp operation.

² Complies with European Union Restriction of Hazardous Substances (Directive 2002/95/EC)

Installation Notes

- Ground ballast case
- Install in accordance with the National Electrical Code
- Insulate unused leads for 600V
- Remote Mounting: 18ft. max lead length 18AWG

System Life/Warranty

LEDVANCE ballasts carry a five-year warranty from date of manufacture. For additional details, check out the latest Warranty Bulletin on our website, ledvanceUS.com.



SCAN OR CLICK OR
CODE TO ACCESS
WARRANTY.

