

# PointMax I/O System Specifications

Bulletin 5034

| Topic                                                  |
|--------------------------------------------------------|
| <a href="#">PointMax I/O System Overview on page 8</a> |
| <a href="#">EtherNet/IP Adapter on page 11</a>         |
| <a href="#">Mounting Bases on page 18</a>              |
| <a href="#">Digital I/O Modules on page 23</a>         |
| <a href="#">Safety Digital I/O Modules on page 61</a>  |
| <a href="#">Analog I/O Modules on page 72</a>          |
| <a href="#">Specialty I/O Module on page 109</a>       |
| <a href="#">Expansion Power on page 133</a>            |
| <a href="#">Power Terminal Module on page 138</a>      |
| <a href="#">Removable Terminal Blocks on page 142</a>  |
| <a href="#">Accessories on page 151</a>                |
| <a href="#">Additional Resources on page 156</a>       |

Rockwell Automation recognizes that some of the terms that are currently used in our industry and in this publication are not in alignment with the movement toward inclusive language in technology. We are proactively collaborating with industry peers to find alternatives to such terms and making changes to our products and content. Please excuse the use of such terms in our content while we implement these changes.

# Summary of Changes

This publication contains the following new or updated information. This list includes substantive updates only and is not intended to reflect all changes. Translated versions are not always available for each revision.

| Topic                                                                                                                                                                                                                                                 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Added the following sections:                                                                                                                                                                                                                         |
| <ul style="list-style-type: none"><li>• <a href="#">5034-IF4IH and 5034-IF4IHXT Analog 4 Input Isolated HART Modules on page 85</a></li><li>• <a href="#">5034-OF4IH and 5034-OF4IHXT Analog 4 Output Isolated HART Modules on page 101</a></li></ul> |
| Updated Environmental Specifications and Certifications for the following:                                                                                                                                                                            |
| <ul style="list-style-type: none"><li>• <a href="#">EtherNet/IP Adapter on page 13</a></li></ul>                                                                                                                                                      |
| Added accessories for 5034-IF4IH, 5034-IF4IHXT, 5034-OF4IH, and 5034-OF4IHXT catalogs to <a href="#">5034-CM18 and 5034-CM24 Color Markers for Removable Terminal Blocks on page 153</a>                                                              |

# Catalog Numbers

This publication is applicable to these modules and accessories:

|                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EtherNet/IP Adapter                  | 5034-AENTR, 5034-AENTRXT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Mounting Base                        | 5034-MB, 5034-MBXT, 5034-MBSA, 5034-MBSAXT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Digital I/O Module                   | 5034-IB16, 5034-IB16XT, 5034-IB8, 5034-IB8XT, 5034-OB16, 5034-OB16XT, 5034-OB8, 5034-OB8XT, 5034-OB4, 5034-OB4XT, 5034-OW4I, 5034-OW4IXT, 5034-UB8, 5034-UB8XT, 5034-UB8F, 5034-UB8FXT                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Safety Digital I/O Module            | 5034-IB8S, 5034-IB8SXT, 5034-OB8S, 5034-OB8SXT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Analog I/O Module                    | 5034-IF8C, 5034-IF8CXT, 5034-IF8V, 5034-IF8VXT, 5034-IF4, 5034-IF4XT, 5034-IRT4I, 5034-IRT4IXT, 5034-OF4, 5034-OF4XT, 5034-IF4IH, 5034-IF4IHXT, 5034-OF4IH, 5034-OF4IHXT                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Specialty I/O Module                 | 5034-IOL4, 5034-IOL4XT, 5034-SERIAL, 5034-SERIALXT, 5034-ENC, 5034-ENCXT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Expansion Power                      | 5034-EXP, 5034-EXPXT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Potential Terminal Module            | 5034-MBPTM, 5034-MBPTMXT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Removable Terminal Block for Modules | 5034-RTB18, 5034-RTB18S, 5034-RTB24S, 5034-RTBT, 5034-RTBTS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Removable Terminal Block Accessories | 5034-RTB2, 5034-RTB2S, 5034-RTB6, 5034-RTB6S                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Accessories                          | 5034-AENRTB-QTY5, 5034-AENRTBS-QTY5, 5034-RTB2-QTY5, 5034-RTB2S-QTY5, 5034-SHIELD-QTY5, 5034-ECR-QTY5, 5034-WIREHLD-QTY5, 5034-CM18-IB16-QTY5, 5034-CM18-OB16-QTY5, 5034-CM18-IB8-QTY5, 5034-CM18-IB8S-QTY5, 5034-CM18-OB8-QTY5, 5034-CM18-OB4-QTY5, 5034-CM18-UB8-QTY5, 5034-CM18-IF4IH-QTY5, 5034-CM18-OF4IH-QTY5, 5034-CM18-IF4-QTY5, 5034-CM18-OF4-QTY5, 5034-CM18-IF8C-QTY5, 5034-CM18-IF8V-QTY5, 5034-CM18-IRT4I-QTY5, 5034-CM18-OW4I-QTY5, 5034-CM18-IOL4-QTY5, 5034-CM18-SERIAL-QTY5, 5034-CM18-ENC-QTY5, 5034-CM18-MBPTM-QTY5, 5034-CM24-IF8-QTY5, 5034-CM24-IB8-QTY5, 5034-CM24-UB8-QTY5, 5034-KEY-QTY5, 5034-N, |

# Terminology

This table defines the terms that are used in this publication.

**Table 1. Terminology**

| Acronym   | Full Term                                  | Definition                                                                                                                                                                                                                  |
|-----------|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BP        | Backplane Power                            | Power that is generated from module power by the adapter and expansion power, and supplied to the I/O system through the backplane.                                                                                         |
| CIP™      | Common Industrial Protocol                 | An industrial communication protocol that is used by Logix 5000® based automation systems on EtherNet/IP™, ControlNet®, and DeviceNet® communication networks.                                                              |
| CIP Sync™ | Common Industrial Protocol Synchronization | CIP Sync provides the increased control coordination needed for control applications where absolute time synchronization is vital to achieve real-time synchronization between distributed intelligent devices and systems. |
| CJC       | Cold Junction Compensator                  | A device that is used in thermocouple measurements to help obtain accurate temperature readings at the hot junction.                                                                                                        |
| DAC       | Digital to Analog Converter                | A device converts digital signals into analog signals, enabling seamless communication between digital devices and analog systems.                                                                                          |
| DCE       | Data Communications Equipment              | A device that facilitates data transmission over a network.                                                                                                                                                                 |
| DTE       | Data Terminal Equipment                    | A device that serves as a communication endpoint in a network.                                                                                                                                                              |
| HART      | Highway Addressable Remote Transducer      | A protocol that enables both analog and digital communication over the same wiring, including device diagnostic and status information.                                                                                     |
| HSC       | High-speed Counter                         | A device that is used to count input signals at a rapid rate.                                                                                                                                                               |
| MB        | Mounting Base                              | A device that provides data and power connections from the backplane to the installed module.                                                                                                                               |
| MP        | Module Power                               | Power that is supplied to the adapter and expansion power.                                                                                                                                                                  |
| MSB       | Most Significant Bit                       | The bit that has the largest value in a multi-bit binary number.                                                                                                                                                            |
| ODVA      | Open DeviceNet Vendor Association          | A nonprofit association of vendors that are established for the promotion of CIP networks.                                                                                                                                  |
| PL        | Performance Level                          | ISO 13849-1 safety rating                                                                                                                                                                                                   |
| RIUP      | Removal and Insertion Under Power          | A feature that enables the device to be connected and disconnected from the system without having to remove power from the system.                                                                                          |
| RPI       | Requested Packet Interval                  | Time interval (usually in milliseconds) that users are requesting their data be exchanged at                                                                                                                                |
| RTB       | Removable Terminal Block                   | A component that is used for wiring field devices to.                                                                                                                                                                       |
| RTD       | Resistance Temperature Detector            | A type of sensor whose resistances change as its temperature changes.                                                                                                                                                       |
| SA        | Sensor Actuator                            | A term that is used to describe field-side devices.                                                                                                                                                                         |

Table 1. Terminology (continued)

| Acronym | Full Term                    | Definition                                                                                                                                                       |
|---------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SELV    | Safety Extra Low Voltage     | An electrical system where the voltage level is considered safe under normal or fault conditions, as defined in the EN and IEC standards.                        |
| SIO     | Standard Input/Output        | Describes the function of a port on an IO-Link master device.                                                                                                    |
| SSI     | Serial Synchronous Interface | A serial communication standard for transmitting data between a leader device and a follower device.                                                             |
| SSV     | Sensor Source Voltage        | Voltage that is supplied to a sensor.                                                                                                                            |
| XT      | Harsh Environment            | These modules have additional conformal coating and design considerations that add a greater degree of protection when exposed to harsh, corrosive environments. |
| VCL     | Voltage Clamp Low            | The low threshold for limiting the voltage level.                                                                                                                |

# Components and Accessories Compatibility

The following table lists the I/O modules and which MB, RTB, and color markers they are compatible with.

**Table 2. Components and Accessories Compatibility**

| Catalog Number | MB Supported           | RTB Supported                        | Color Marker (5034-CM18) | Color Marker (5034-CM24) |
|----------------|------------------------|--------------------------------------|--------------------------|--------------------------|
| 5034-IB16      | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S              | 5034-CM18-IB16-QTY5      | -                        |
| 5034-IB16XT    | 5034-MBXT, 5034-MBSAXT |                                      |                          |                          |
| 5034-IB8       | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S, 5034-RTB24S | 5034-CM18-IB8-QTY5       | 5034-CM24-IB8-QTY5       |
| 5034-IB8XT     | 5034-MBXT, 5034-MBSAXT |                                      |                          |                          |
| 5034-IF4IH     | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S              | CM18-IF4IH-QTY5          | -                        |
| 5034-IF4IHXT   | 5034-MBXT, 5034-MBSAXT |                                      |                          |                          |
| 5034-OB16      | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S              | 5034-CM18-OB16-QTY5      | -                        |
| 5034-OB16XT    | 5034-MBXT, 5034-MBSAXT |                                      |                          |                          |
| 5034-OB8       | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S              | 5034-CM18-OB8-QTY5       | -                        |
| 5034-OB8XT     | 5034-MBXT, 5034-MBSAXT |                                      |                          |                          |
| 5034-OB4       | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S              | 5034-CM18-OB4-QTY5       | -                        |
| 5034-OB4XT     | 5034-MBXT, 5034-MBSAXT |                                      |                          |                          |
| 5034-OF4IH     | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S              | 5034-CM18-OF4IH-QTY5     | -                        |
| 5034-OF4IHXT   | 5034-MBXT, 5034-MBSAXT |                                      |                          |                          |
| 5034-OW4I      | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S              | 5034-CM18-OW4I-QTY5      | -                        |
| 5034-OW4IXT    | 5034-MBXT, 5034-MBSAXT |                                      |                          |                          |
| 5034-UB8       | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S, 5034-RTB24S | 5034-CM18-UB8-QTY5       | 5034-CM24-UB8-QTY5       |
| 5034-UB8XT     | 5034-MBXT, 5034-MBSAXT |                                      |                          |                          |
| 5034-UB8F      | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S, 5034-RTB24S | 5034-CM18-UB8-QTY5       | 5034-CM24-UB8-QTY5       |
| 5034-UB8FXT    | 5034-MBXT, 5034-MBSAXT |                                      |                          |                          |
| 5034-IB8S      | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S              | 5034-CM18-IB8S-QTY5      | -                        |
| 5034-IB8SXT    | 5034-MBXT, 5034-MBSAXT |                                      |                          |                          |
| 5034-OB8S      | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S              | 5034-CM18-OB8-QTY5       | -                        |

**Table 2. Components and Accessories Compatibility (continued)**

| Catalog Number | MB Supported           | RTB Supported                                     | Color Marker<br>(5034-CM18) | Color Marker<br>(5034-CM24) |
|----------------|------------------------|---------------------------------------------------|-----------------------------|-----------------------------|
| 5034-OB8SXT    | 5034-MBXT, 5034-MBSAXT |                                                   |                             |                             |
| 5034-IF8C      | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S,<br>5034-RTB24S           | 5034-CM18-IF8C-QTY5         | 5034-CM24-IF8C-QTY5         |
| 5034-IF8CXT    | 5034-MBXT, 5034-MBSAXT |                                                   |                             |                             |
| 5034-IF8V      | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S,<br>5034-RTB24S           | 5034-CM18-IF8V-QTY5         | 5034-CM24-IF8V-QTY5         |
| 5034-IF8VXT    | 5034-MBXT, 5034-MBSAXT |                                                   |                             |                             |
| 5034-IF4       | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S                           | 5034-CM18-IF4-QTY5          | -                           |
| 5034-IF4XT     | 5034-MBXT, 5034-MBSAXT |                                                   |                             |                             |
| 5034-IRT4I     | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S,<br>5034-RTBT, 5034-RTBTS | 5034-CM18-IRT4I-QTY5        | -                           |
| 5034-IRT4IXT   | 5034-MBXT, 5034-MBSAXT |                                                   |                             |                             |
| 5034-OF4       | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S                           | 5034-CM18-OF4-QTY5          | -                           |
| 5034-OF4XT     | 5034-MBXT, 5034-MBSAXT |                                                   |                             |                             |
| 5034-IOL4      | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S                           | 5034-CM18-IOL4-QTY5         | -                           |
| 5034-IOL4XT    | 5034-MBXT, 5034-MBSAXT |                                                   |                             |                             |
| 5034-SERIAL    | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S                           | 5034-CM18-SERIAL-QTY5       | -                           |
| 5034-SERIAL    | 5034-MBXT, 5034-MBSAXT |                                                   |                             |                             |
| 5034-ENC       | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S                           | 5034-CM18-ENC-QTY5          | -                           |
| 5034-ENCXT     | 5034-MBXT, 5034-MBSAXT |                                                   |                             |                             |
| 5034-MBPTM     | 5034-MB, 5034-MBSA     | 5034-RTB18, 5034-RTB18S                           | 5034-CM18-MBPTM-QTY5        | -                           |
| 5034-MBPTMXT   | 5034-MBXT, 5034-MBSAXT |                                                   |                             |                             |

# PointMax I/O System Overview

**Figure 1. PointMax I/O System**




The PointMax™ I/O architecture provides a wide range of input and output modules to span many applications, such as machine, hybrid, and process control. The architecture uses Producer/Consumer technology that allows input information and output status to be shared among multiple Logix 5000 controllers. PointMax I/O systems are used as remote I/O modules with Logix 5000 controllers. You configure the modules with the Studio 5000 Logix Designer® application.

A PointMax I/O system consists of one EtherNet/IP adapter and supports up to 32 I/O modules. A 5034-EXP or 5034-EXPXT expansion power is required when using more than 16 I/O modules. The I/O modules are mounted on an MB and require an RTB to connect field-side wiring. You must purchase an MB and an RTB individually for each I/O module.

The PointMax I/O system is mounted onto a zinc-plated chromate-passivated steel DIN rail such as the Allen-Bradley® 199-DR1; 46277-4; EN 60715 – 35 x 7.5 mm (1.38 x 0.30 in.). You must also install DIN rail end anchors (Allen-Bradley 1492-EAJ35 or 1492-EAHJ35) at both ends of your system for vibration or shock environments. See PointMax I/O System Installation Instructions, publication [5034-IN001](#) for mounting guidelines.

The PointMax I/O system can be oriented in the following positions.


Figure 2. PointMax I/O System Mounting Orientations

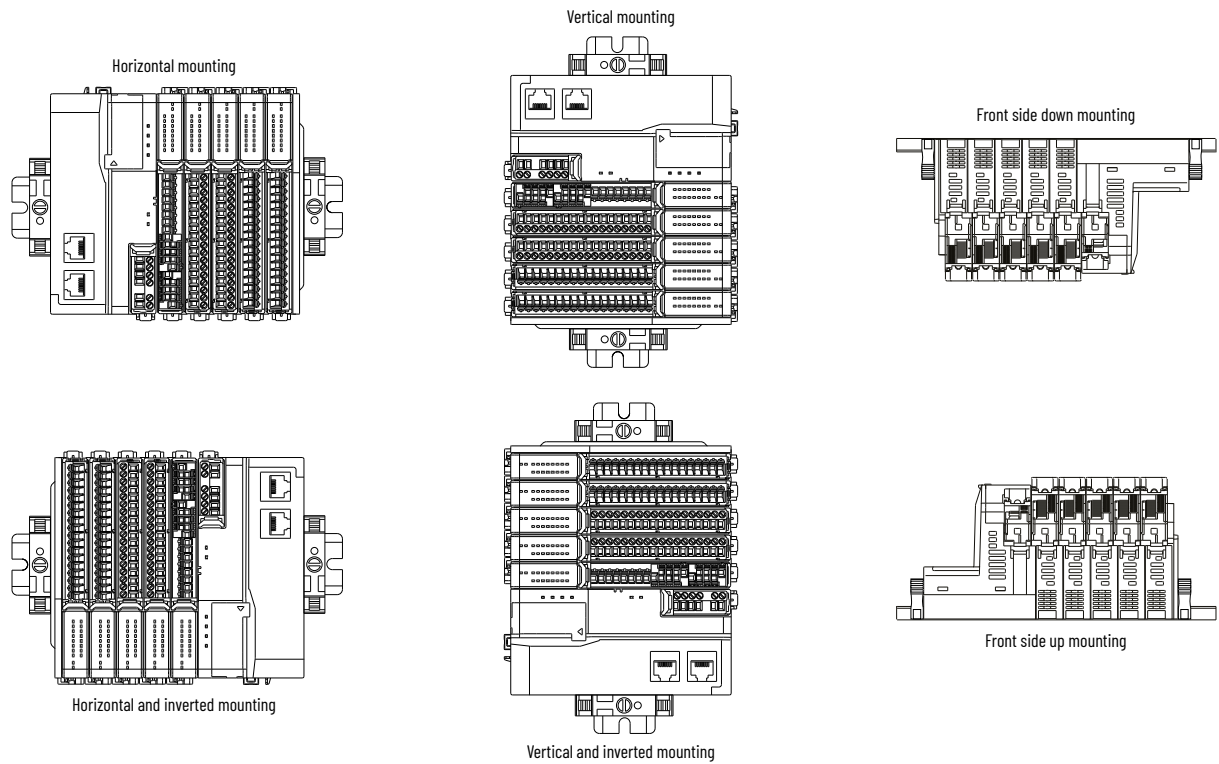

**Spacing**

Maintain spacing from enclosure walls, wireways, and adjacent equipment. Allow 25.4 mm (1 in.) of space on all sides for adequate ventilation.


Figure 3. Spacing Example

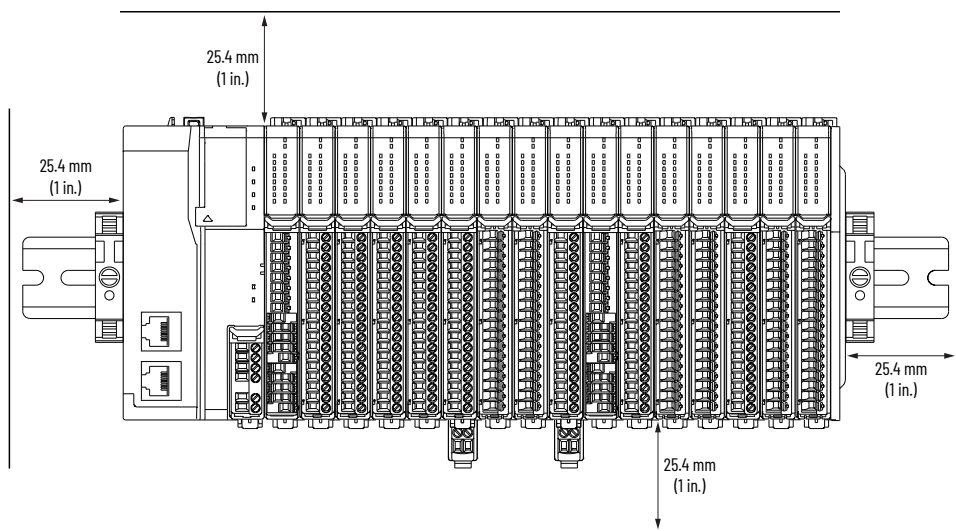

**Dimensions**

The dimension measurements that are provided in this publication are based on the horizontal mounting orientation.

Figure 4. Dimension Example

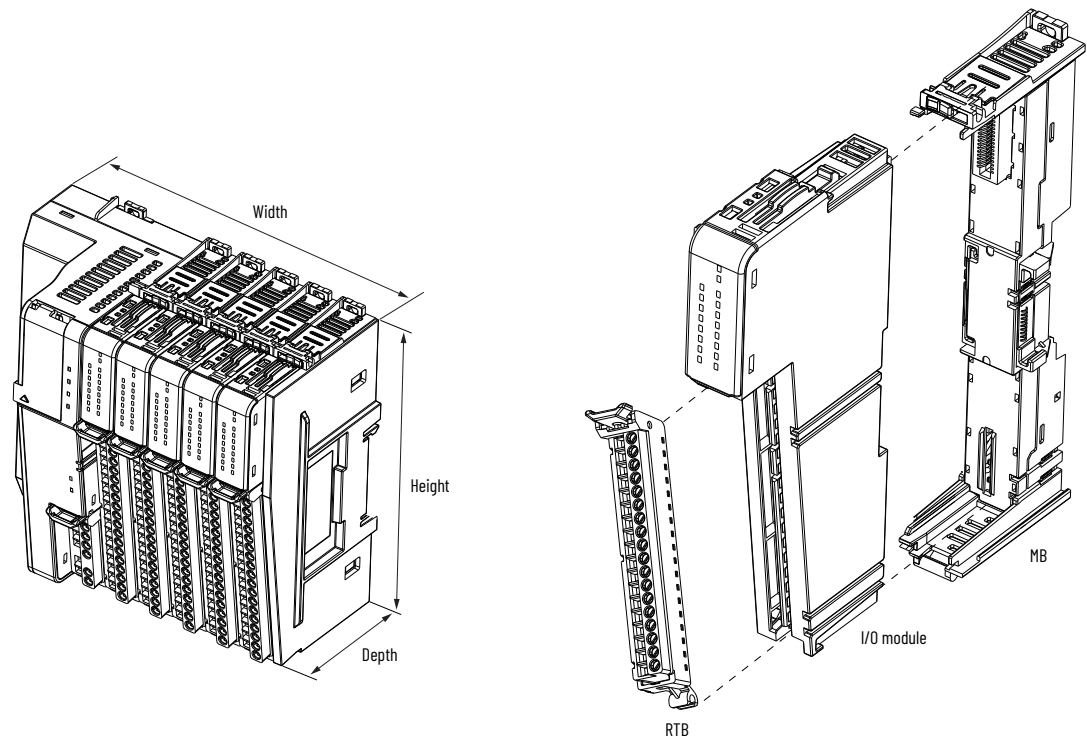

An I/O module, MB, and RTB are required to fill a slot in the chassis.

# EtherNet/IP Adapter

| Module Type         | Catalog Number           | Description              |
|---------------------|--------------------------|--------------------------|
| EtherNet/IP Adapter | 5034-AENTR, 5034-AENTRXT | EtherNet/IP RJ45 adapter |

Environmental specifications and certifications for PointMax EtherNet/IP adapter are provided in [Environmental Specifications and Certifications on page 13](#).

## Specifications

Figure 5. 5034-AENTR and 5034-AENTRXT Wiring Diagram

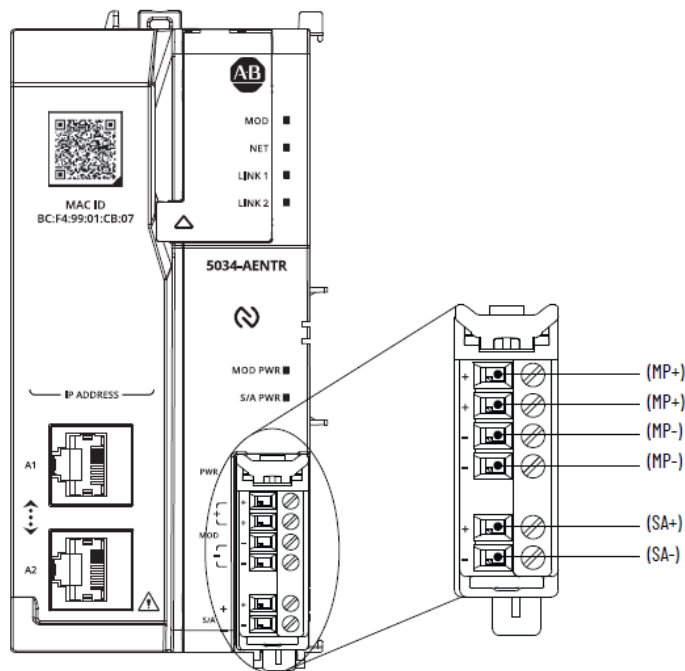


Table 3. Technical Specifications - 5034-AENTR, 5034-AENTRXT

| Attribute                       | 5034-AENTR, 5034-AENTRXT                                                        |
|---------------------------------|---------------------------------------------------------------------------------|
| Number of I/O modules supported | 32<br>A 5034-EXP or 5034-EXPXT is required when using more than 16 I/O modules. |
| Number of MB supported          | 16 for 18...30V DC<br>8 for 10...18V DC                                         |
| MP voltage, nom                 | 24V DC SELV                                                                     |
| MP voltage range                | 10...30V DC SELV                                                                |
| MP current, nom                 | 0.6 A @ 24V DC                                                                  |
| MP current, max                 | 850 mA @ 10V DC (8 MB)                                                          |

**Table 3. Technical Specifications - 5034-AENTR, 5034-AENTRXT (continued)**

| Attribute                                   | 5034-AENTR, 5034-AENTRXT                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                             | 800 mA @ 18V DC (16 MB)<br>500 mA @ 30V DC (16 MB)                                                                                                                                                                                                                                                                                                                                     |
| Voltage and current ratings, MP inrush, max | 6 A for 10 ms @ 24V DC SELV                                                                                                                                                                                                                                                                                                                                                            |
| Voltage and current ratings, SA             | 10...30V DC SELV, 10 A<br>Do not exceed 10 A current draw at the SA power RTB                                                                                                                                                                                                                                                                                                          |
| Voltage and current ratings, backplane      | 16V DC, 300 mA max (8 MB)<br>16V DC, 600 mA max (16 MB)                                                                                                                                                                                                                                                                                                                                |
| SA power current at no load                 | 2 mA                                                                                                                                                                                                                                                                                                                                                                                   |
| Power dissipation, max                      | 3.6 W                                                                                                                                                                                                                                                                                                                                                                                  |
| Thermal dissipation, max                    | 12.3 BTU/hr                                                                                                                                                                                                                                                                                                                                                                            |
| Isolation voltage                           | 250V (continuous), Basic Isolation, SA to backplane<br>250V (continuous), Basic Isolation, SA to MP<br>250V (continuous), Basic Isolation, Ethernet port to SA<br>60V (continuous), Basic Isolation, MP to backplane<br>60V (continuous), Basic Isolation, Ethernet port to MP<br>60V (continuous), Basic Isolation, Ethernet port to backplane<br>No isolation between Ethernet ports |
| RTB supported                               | An RTB and end cap ships with the adapter.<br>You can order additional screw-type (5034-AENRTB-QTY5) and push-in spring-type (5034-AENRTBS-QTY5) RTBs separately.                                                                                                                                                                                                                      |
| Wiring category <sup>(1)</sup>              | 2 - Power ports<br>2 - Ethernet ports                                                                                                                                                                                                                                                                                                                                                  |
| Wiring specification                        | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a>                                                                                                                                                                                                                               |
| Indicators                                  | 1 green/red module status indicator<br>1 green/red network status indicator<br>2 green/red network connection status indicators<br>1 green module power status indicator<br>1 green SA power status indicator                                                                                                                                                                          |
| Dimensions (HxWxD), approx                  | 131.74 x 62.65 x 76 mm (5.18 x 2.46 x 2.99 in.)                                                                                                                                                                                                                                                                                                                                        |
| Weight, approx                              | 200 g (7.05 oz.) - 5034-AENTR                                                                                                                                                                                                                                                                                                                                                          |

**Table 3. Technical Specifications – 5034-AENTR, 5034-AENTRXT (continued)**

| Attribute                   | 5034-AENTR, 5034-AENTRXT        |
|-----------------------------|---------------------------------|
|                             | 202 g (7.13 oz.) – 5034-AENTRXT |
| Enclosure type              | None (Open-style)               |
| North American temp code    | T4                              |
| UKEX/ATEX temp code         | T4                              |
| IECEx temp code             | T4                              |
| NFC communication frequency | 13.56 MHz passive type          |

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## Environmental Specifications and Certifications

The following tables provide the environmental specifications and certifications for the PointMax EtherNet/IP adapter.

**Table 4. Environmental Specifications – PointMax EtherNet/IP Adapter**

| Attribute                                                                           | 5034-AENTR                                                                                                                                                                                                                                                                                       | 5034-AENTRXT |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Temperature, operating                                                              | IEC 60068-2-1 (Test Ae, Operating Cold),<br>IEC 60068-2-2 (Test Be, Operating Dry Heat),<br>IEC 60068-2-14 (Test Nb, Operating Thermal Shock):<br>-25 °C ≤ Ta ≤ +60 °C (-13 °F ≤ Ta ≤ +140 °F) for horizontal orientation<br>-25 °C ≤ Ta ≤ +55 °C (-13 °F ≤ Ta ≤ +131 °F) for other orientations |              |
| Temperature, surrounding air, max                                                   | 60 °C (140 °F)                                                                                                                                                                                                                                                                                   |              |
| Temperature, nonoperating                                                           | IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold),<br>IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat),<br>IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock):<br>-40...+85 °C (-40...+185 °F)                                                                         |              |
| Relative humidity                                                                   | IEC 60068-2-30 (Test Db, Unpackaged Damp Heat):<br>5...95% noncondensing                                                                                                                                                                                                                         |              |
| Conformal coated                                                                    | No                                                                                                                                                                                                                                                                                               | Yes          |
| Corrosive Atmosphere<br>ASTM B845-97 Method K<br>Accelerated Test (20-Day Exposure) | Severity Level G3 <sup>(1)</sup> (2) per ANSI/ISA 71.04-2013, Airborne Contaminants—Gases                                                                                                                                                                                                        | —            |

**Table 4. Environmental Specifications - PointMax EtherNet/IP Adapter (continued)**

| Attribute                                                                                                                                                                                                                                                                                                  | 5034-AENTR                                                                                                                                                                      | 5034-AENTRXT                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Corrosive Atmosphere <ul style="list-style-type: none"> <li>ASTM B845-97 Method K Accelerated Test (30-Day Exposure)</li> <li>Plus additional Rockwell Automation proprietary accelerated corrosive environment test protocol for specific industries with sources of gaseous sulfur compounds.</li> </ul> | —                                                                                                                                                                               | Severity Level GX <sup>(1)(3)</sup> per ANSI/ISA 71.04-2013, Airborne Contaminants—Gases<br><br>Severity Level CX <sup>(1)</sup> per IEC 60721-3-3:2019, Chemically Active Substances |
| Vibration                                                                                                                                                                                                                                                                                                  | IEC 60068-2-6 (Test Fc, Operating):<br><br>5 g @ 10...500 Hz                                                                                                                    |                                                                                                                                                                                       |
| Shock, operating                                                                                                                                                                                                                                                                                           | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br><br>30 g                                                                                                                         |                                                                                                                                                                                       |
| Repetitive shock, operating                                                                                                                                                                                                                                                                                | IEC 60068-2-27:<br><br>25 g, 6 ms duration, 1000 shocks in each ± direction in each 3 axis                                                                                      |                                                                                                                                                                                       |
| Shock, nonoperating                                                                                                                                                                                                                                                                                        | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br><br>50 g                                                                                                                         |                                                                                                                                                                                       |
| Emissions                                                                                                                                                                                                                                                                                                  | IEC 61000-6-4:<br><br>EN 300 330                                                                                                                                                |                                                                                                                                                                                       |
| ESD immunity                                                                                                                                                                                                                                                                                               | IEC 61000-4-2:<br><br>6 kV contact discharges<br><br>8 kV air discharges<br><br>EN 301 489-1:<br><br>EN 301 489-3:<br><br>4 kV contact discharges<br><br>8 kV air discharges    |                                                                                                                                                                                       |
| Radiated RF immunity                                                                                                                                                                                                                                                                                       | IEC 61000-4-3:<br><br>10V/m with 1 kHz sine wave 80% AM from 80...6000 MHz<br><br>EN 301 489-1:<br><br>EN 301 489-3:<br><br>3V/m with 1 kHz sine wave 80% AM from 80...6000 MHz |                                                                                                                                                                                       |
| EFT/B immunity                                                                                                                                                                                                                                                                                             | IEC 61000-4-4:<br><br>±3 kV @ 5 kHz on power ports<br><br>±3 kV @ 5 kHz on Ethernet ports                                                                                       |                                                                                                                                                                                       |

**Table 4. Environmental Specifications - PointMax EtherNet/IP Adapter (continued)**

| Attribute                   | 5034-AENTR                                                                                                                                                                | 5034-AENTRXT |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
|                             | EN 301 489-1:<br>EN 301 489-3:<br>±0.5 kV @ 5 kHz on power ports                                                                                                          |              |
| Surge transient immunity    | IEC 61000-4-5:<br>EN 301 489-1:<br>EN 301 489-3:<br>±1 kV line-line (DM) and ±2 kV line-earth (CM) on power ports<br>±2 kV line-earth (CM) on Ethernet ports              |              |
| Conducted RF immunity       | IEC 61000-4-6:<br>10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz<br>EN 301 489-1:<br>EN 301 489-3:<br>3V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz |              |
| Voltage dips and variations | IEC 61000-4-29:<br>10 ms interruption on MP ports                                                                                                                         |              |

(1) Dust caps must remain installed in unused ports at all times during storage and operation for the product to meet its corrosive atmosphere rating. The adapter and the corresponding RTB must remain installed at all times, once the factory packaging seal is broken, for the product to maintain its corrosive atmosphere rating.

(2) Up to 86.4 g/(m<sup>2</sup>.yr), mass loss of copper due to corrosion.

(3) Up to 2100 angstroms of film growth per 30 days of copper and/or silver reactivity.

**Table 5. Certifications - PointMax EtherNet/IP Adapter**

| Certification <sup>(1)</sup> | 5034-AENTR, 5034-AENTRXT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| c-UL-us                      | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657.<br><br>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.                                                                                                                                                                                                                                                                                                                                                                             |
| UK and CE                    | UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with:<br>EN 61326-1; Meas./Control/Lab., Industrial Requirements<br>EN 61000-6-2; Industrial Immunity<br>EN 61000-6-4; Industrial Emissions<br>EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)<br>ETSI EN 301 489-1 V2.2.3; EMC requirements for radio equipment<br>UK Statutory Instrument 2016 No. 1101 and European Union 2014/35/EU LVD, compliant with:<br>EN 61010-2-201; Control Equipment Safety Requirements<br>ETSI EN 301 489-3 V 2.3.2; EMC requirements for short range devices |

**Table 5. Certifications - PointMax EtherNet/IP Adapter (continued)**

| Certification <sup>(1)</sup> | 5034-AENTR, 5034-AENTRXT                                                                                                                                                                                                                                                                                                                |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                              | <p>UK Statutory Instrument 2012 No. 3032 and European Union 2011/65/EU RoHS, compliant with:<br/>EN IEC 63000; Technical documentation</p> <p>UK Statutory Instrument 2017 No. 1206 and European Union 2014/53/EU Radio Equipment Directive, compliant with:<br/>ETSI EN 300 330 V2.1.1; Radio requirements for short range devices</p> |
| RCM                          | <p>Australian Radiocommunications Act, compliant with:<br/>EN 61000-6-4; Industrial Emissions</p> <p>ETSI EN 301 489-1 V2.2.3; EMC requirements for radio equipment</p> <p>ETSI EN 301 489-3 V2.3.2; EMC requirements for short range devices</p> <p>ETSI EN 300 330 V2.1.1; Radio requirements for short range devices</p>             |
| Ex                           | <p>UK Statutory Instrument 2016 No. 1107 and European Union 2014/34/EU ATEX Directive, compliant with:<br/>EN IEC 60079-0; General Requirements</p> <p>EN IEC 60079-7; Explosive Atmospheres, Protection "e"</p> <p>II 3 G Ex ec IIC T4 Gc</p> <p>UL 24 ATEX 3272X and UL24UKEX2997X</p>                                                |
| IECEx                        | <p>IECEx System, compliant with:<br/>IEC 60079-0; General Requirements</p> <p>IEC 60079-7; Explosive Atmospheres, Protection "e"</p> <p>II 3 G Ex ec IIC T4 Gc</p> <p>IECEx UL 24.0066X</p>                                                                                                                                             |
| FCC                          | <p>FCC Part 15B</p> <p>Class A</p>                                                                                                                                                                                                                                                                                                      |
| KC                           | <p>Korean Registration of Broadcasting and Communications Equipment, compliant with:<br/>Article 58-2 of Radio Waves Act, Clause 4</p>                                                                                                                                                                                                  |
| Morocco                      | <p>Arrêté ministériel n° 6404-15 du 1 er muharram 1437</p> <p>Arrêté ministériel n° 6404-15 du 29 ramadan 1436</p>                                                                                                                                                                                                                      |
| CCC                          | <p>CNCA-C23-01 强制性产品认证实施规则 防爆电气</p> <p>CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products</p> <p>2025122309123247</p>                                                                                                                                                                                              |
| ISED                         | ICES-001                                                                                                                                                                                                                                                                                                                                |
| EtherNet/IP                  | ODVA conformance tested to EtherNet/IP specifications                                                                                                                                                                                                                                                                                   |
| NFC                          | Country-specific                                                                                                                                                                                                                                                                                                                        |

Table 5. Certifications - PointMax EtherNet/IP Adapter (continued)

|                              |                                                                                                     |
|------------------------------|-----------------------------------------------------------------------------------------------------|
| Certification <sup>(1)</sup> | 5034-AENTR, 5034-AENTRXT                                                                            |
|                              | For a list of countries in which the product is certified for NFC, see <a href="#">5034-CT100</a> . |

(1) When marked. See the Product Certifications website at [rok.auto/certifications](http://rok.auto/certifications) for declarations of conformity, certificates, and other certification details.

# Mounting Bases

| Module Type   | Catalog Number         | Description                                    |
|---------------|------------------------|------------------------------------------------|
| Mounting Base | 5034-MB, 5034-MBXT     | Mounting base – 15 mm (0.59 in.)               |
|               | 5034-MBSA, 5034-MBSAXT | Mounting base – 15 mm (0.59 in.) with SA power |

Environmental specifications and certifications for PointMax mounting bases are provided in [Environmental Specifications and Certifications on page 20](#).

## 5034-MB and 5034-MBXT Mounting Bases

Figure 6. 5034-MB Diagram

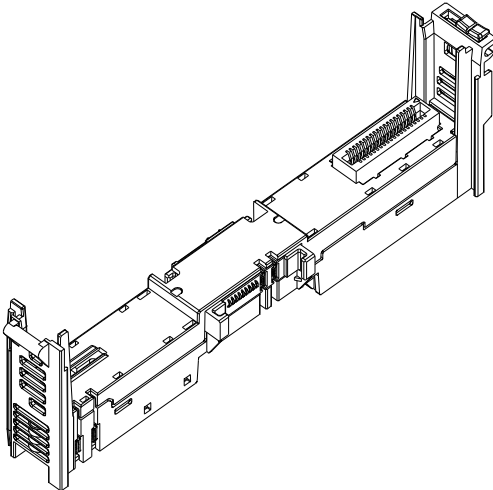


Table 6. General Specifications - 5034-MB, 5034-MBXT

| Attribute                                        | 5034-MB, 5034-MBXT                                        |
|--------------------------------------------------|-----------------------------------------------------------|
| SA power, operating voltage, nom                 | Passthrough                                               |
| SA power, operating voltage range                | Passthrough                                               |
| SA power, current, max                           | Passthrough                                               |
| Power dissipation, max                           | 0.5 W                                                     |
| Isolation voltage                                | 250V (continuous), Basic Insulation Type, SA to backplane |
| Dimensions (HxWxD), approx<br>Without I/O module | 132 x 15 x 43 mm (5.2 x 0.59 x 1.69 in.)                  |
| Weight, approx                                   | 34 g (1.20 oz.) – 5034-MB<br>35 g (1.23 oz.) – 5034-MBXT  |

Table 6. General Specifications - 5034-MB, 5034-MBXT (continued)

| Attribute                | 5034-MB, 5034-MBXT |
|--------------------------|--------------------|
| Enclosure type           | None (Open-style)  |
| North American temp code | T4                 |
| UKEX/ATEX temp code      | T4                 |
| IECEx temp code          | T4                 |

5034-MBSA and 5034-MBSAXT Mounting Bases with SA Power

Figure 7. 5034-MBSA Wiring Diagram

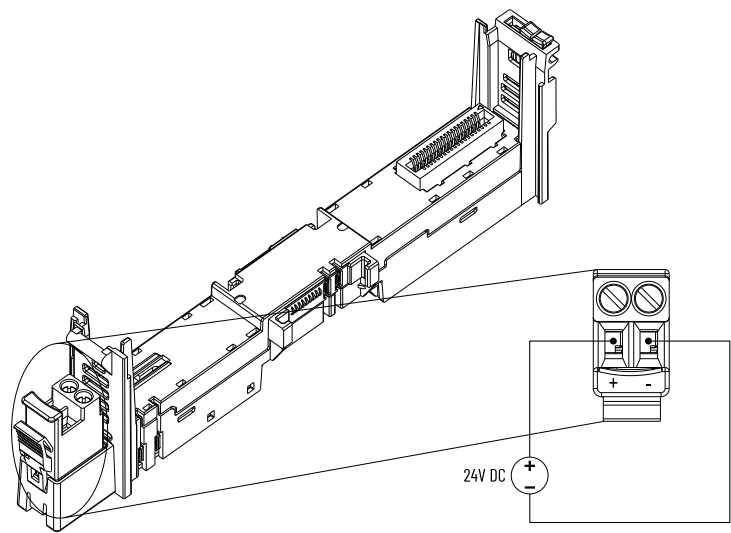


Table 7. General Specifications - 5034-MBSA, 5034-MBSAXT

| Attribute                         | 5034-MBSA, 5034-MBSAXT                                                                                                                       |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| SA power, operating voltage, nom  | 24V DC, SELV                                                                                                                                 |
| SA power, operating voltage range | 10...30V DC, SELV                                                                                                                            |
| SA power, current, max            | 10 A                                                                                                                                         |
| Power dissipation, max            | 0.5 W                                                                                                                                        |
| Isolation voltage                 | 250V (continuous), Basic Insulation Type, SA to backplane                                                                                    |
| RTB supported                     | An RTB ships with the product.<br>You can order additional screw-type (5034-RTB2-QTY5) and push-in spring-type (5034-RTB2S-QTY5) separately. |
| Wiring category <sup>(1)</sup>    | 2 - Power ports                                                                                                                              |

**Table 7. General Specifications - 5034-MBSA, 5034-MBSAXT (continued)**

| Attribute                                        | 5034-MBSA, 5034-MBSAXT                                                                                                                                   |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Wiring specification                             | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Dimensions (HxWxD), approx<br>Without I/O module | 149 x 15 x 43 mm (5.87 x 0.59 x 1.69 in.)                                                                                                                |
| Weight, approx                                   | 37 g (1.30 oz.) - 5034-MBSA<br>38 g (1.34 oz.) - 5034-MBSAXT                                                                                             |
| Enclosure type                                   | None (Open-style)                                                                                                                                        |
| North American temp code                         | T4                                                                                                                                                       |
| UKEX/ATEX temp code                              | T4                                                                                                                                                       |
| IECEx temp code                                  | T4                                                                                                                                                       |

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## Environmental Specifications and Certifications

The following tables provide the environmental specifications and certifications for the PointMax mounting bases.

**Table 8. Environmental Specifications - PointMax Mounting Bases**

| Attribute                         | 5034-MB, 5034-MBSA                                                                                                                                                                                                                                                                               | 5034-MBXT, 5034-MBSAXT |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Temperature, operating            | IEC 60068-2-1 (Test Ae, Operating Cold),<br>IEC 60068-2-2 (Test Be, Operating Dry Heat),<br>IEC 60068-2-14 (Test Nb, Operating Thermal Shock):<br>-25 °C ≤ Ta ≤ +60 °C (-13 °F ≤ Ta ≤ +140 °F) for horizontal orientation<br>-25 °C ≤ Ta ≤ +55 °C (-13 °F ≤ Ta ≤ +131 °F) for other orientations |                        |
| Temperature, surrounding air, max | 60 °C (140 °F)                                                                                                                                                                                                                                                                                   |                        |
| Temperature, nonoperating         | IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold),<br>IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat),<br>IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock):<br>-40...+85 °C (-40...+185 °F)                                                                         |                        |
| Relative humidity                 | IEC 60068-2-30 (Test Db, Unpackaged Damp Heat):<br>5...95% noncondensing                                                                                                                                                                                                                         |                        |

**Table 8. Environmental Specifications - PointMax Mounting Bases (continued)**

| Attribute                                                                                                                                                                                                                                                                                                                                  | 5034-MB, 5034-MBSA                                                                         | 5034-MBXT, 5034-MBSAXT                                                                                                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Conformal coated                                                                                                                                                                                                                                                                                                                           | No                                                                                         | Yes                                                                                                                                                                       |
| Corrosive Atmosphere<br>ASTM B845-97 Method K<br>Accelerated Test (20-Day<br>Exposure)                                                                                                                                                                                                                                                     | Severity Level G3 <sup>(1)</sup> per ANSI/ISA 71.04-2013, Airborne<br>Contaminants—Gases   | —                                                                                                                                                                         |
| Corrosive Atmosphere <ul style="list-style-type: none"> <li>ASTM B845-97 Method K<br/>Accelerated Test (30-Day<br/>Exposure)</li> <li>Plus additional Rockwell<br/>Automation proprietary<br/>accelerated corrosive<br/>environment test protocol<br/>for specific industries with<br/>sources of gaseous sulfur<br/>compounds.</li> </ul> | —                                                                                          | Severity Level GX <sup>(2)</sup> per ANSI/ISA 71.04-2013, Airborne<br>Contaminants—Gases<br><br>Severity Level CX per IEC 60721-3-3:2019, Chemically Active<br>Substances |
| Vibration                                                                                                                                                                                                                                                                                                                                  | IEC 60068-2-6 (Test Fc, Operating):<br><br>5 g @ 10...500 Hz                               |                                                                                                                                                                           |
| Shock, operating                                                                                                                                                                                                                                                                                                                           | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br><br>30 g                                    |                                                                                                                                                                           |
| Repetitive shock, operating                                                                                                                                                                                                                                                                                                                | IEC 60068-2-27:<br><br>25 g, 6 ms duration, 1000 shocks in each ± direction in each 3 axis |                                                                                                                                                                           |
| Shock, nonoperating                                                                                                                                                                                                                                                                                                                        | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br><br>50 g                                    |                                                                                                                                                                           |

(1) Up to 86.4 g/(m2.yr), mass loss of copper due to corrosion.

(2) Up to 2100 angstroms of film growth per 30 days of copper and/or silver reactivity.

**Table 9. Certifications - PointMax Mounting Bases**

| Certification <sup>(1)</sup> | 5034-MB, 5034-MBXT, 5034-MBSA, 5034-MBSAXT                                                                                                                                                                                                           |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| c-UL-us                      | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657.<br><br>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.                            |
| UK and CE                    | UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with:<br><br>EN 61326-1; Meas./Control/Lab., Industrial Requirements<br><br>EN 61000-6-2; Industrial Immunity<br><br>EN 61000-6-4; Industrial Emissions |

**Table 9. Certifications - PointMax Mounting Bases (continued)**

| Certification <sup>(1)</sup> | 5034-MB, 5034-MBXT, 5034-MBSA, 5034-MBSAXT                                                                                                                                                                                                                                                                                                             |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                              | EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)<br>UK Statutory Instrument 2016 No. 1101 and European Union 2014/35/EU LVD, compliant with:<br>EN 61010-2-201; Control Equipment Safety Requirements<br>UK Statutory Instrument 2012 No. 3032 and European Union 2011/65/EU RoHS, compliant with:<br>EN IEC 63000; Technical documentation |
| RCM                          | Australian Radiocommunications Act, compliant with:<br>EN 61000-6-4; Industrial Emissions                                                                                                                                                                                                                                                              |
| Ex                           | UK Statutory Instrument 2016 No. 1107 and European Union 2014/34/EU ATEX Directive, compliant with:<br>EN IEC 60079-0; General Requirements<br>EN IEC 60079-7; Explosive Atmospheres, Protection "e"<br>II 3 G Ex ec IIC T4 Gc<br>UL 24 ATEX 3272X and UL24UKEX2997X                                                                                   |
| IECEX                        | IECEx System, compliant with:<br>IEC 60079-0; General Requirements<br>IEC 60079-7; Explosive Atmospheres, Protection "e"<br>II 3 G Ex ec IIC T4 Gc<br>IECEx UL 24.0066X                                                                                                                                                                                |
| KC                           | Korean Registration of Broadcasting and Communications Equipment, compliant with:<br>Article 58-2 of Radio Waves Act, Clause 4                                                                                                                                                                                                                         |
| Morocco                      | Arrêté ministériel n° 6404-15 du 1 er muharram 1437<br>Arrêté ministériel n° 6404-15 du 29 ramadan 1436                                                                                                                                                                                                                                                |

(1) When marked. See the Product Certifications website at [rok.auto/certifications](http://rok.auto/certifications) for declarations of conformity, certificates, and other certification details.


# Digital I/O Modules

| I/O Type                  | Catalog Number         | Description                 |
|---------------------------|------------------------|-----------------------------|
| Digital Input             | 5034-IB16, 5034-IB16XT | Digital 16 input            |
|                           | 5034-IB8, 5034-IB8XT   | Digital 8 input             |
| Digital Output            | 5034-OB16, 5034-OB16XT | Digital 16 output           |
|                           | 5034-OB8, 5034-OB8XT   | Digital 8 output            |
|                           | 5034-OB4, 5034-OB4XT   | Digital 4 output 2 A        |
| Relay Output              | 5034-OW4I, 5034-OW4IXT | Relay 4 output isolated 2 A |
| Configurable Input/Output | 5034-UB8, 5034-UB8XT   | Digital 8 input/output      |
|                           | 5034-UB8F, 5034-UB8FXT | Fast digital 8 input/output |

Environmental specifications and certifications for PointMax digital I/O modules are provided in [Environmental Specifications and Certifications on page 58](#).

## 5034-IB16 and 5034-IB16XT Digital 16 Input Modules

Figure 8. 5034-IB16 and 5034-IB16XT Wiring Diagram

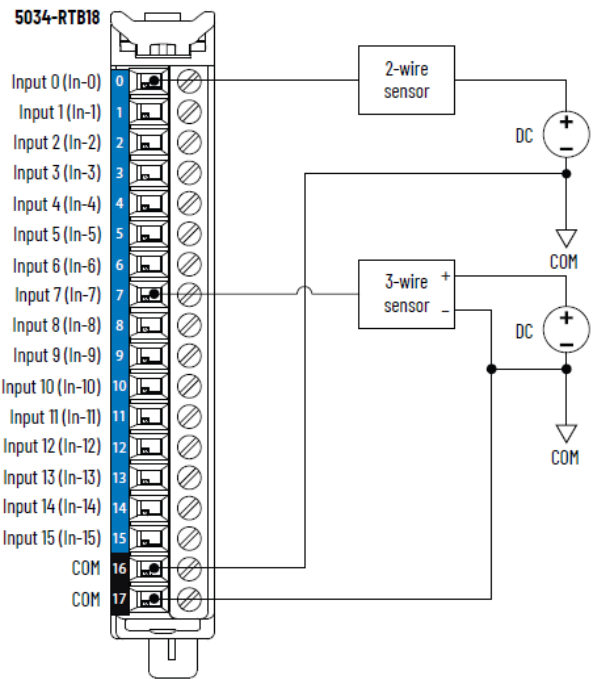

To establish more COM connections, install a 5034-MBPTM or 5034-MBPTMXT next to the module.

Figure 9. 5034-IB16 and 5034-IB16XT Functional Block Diagram

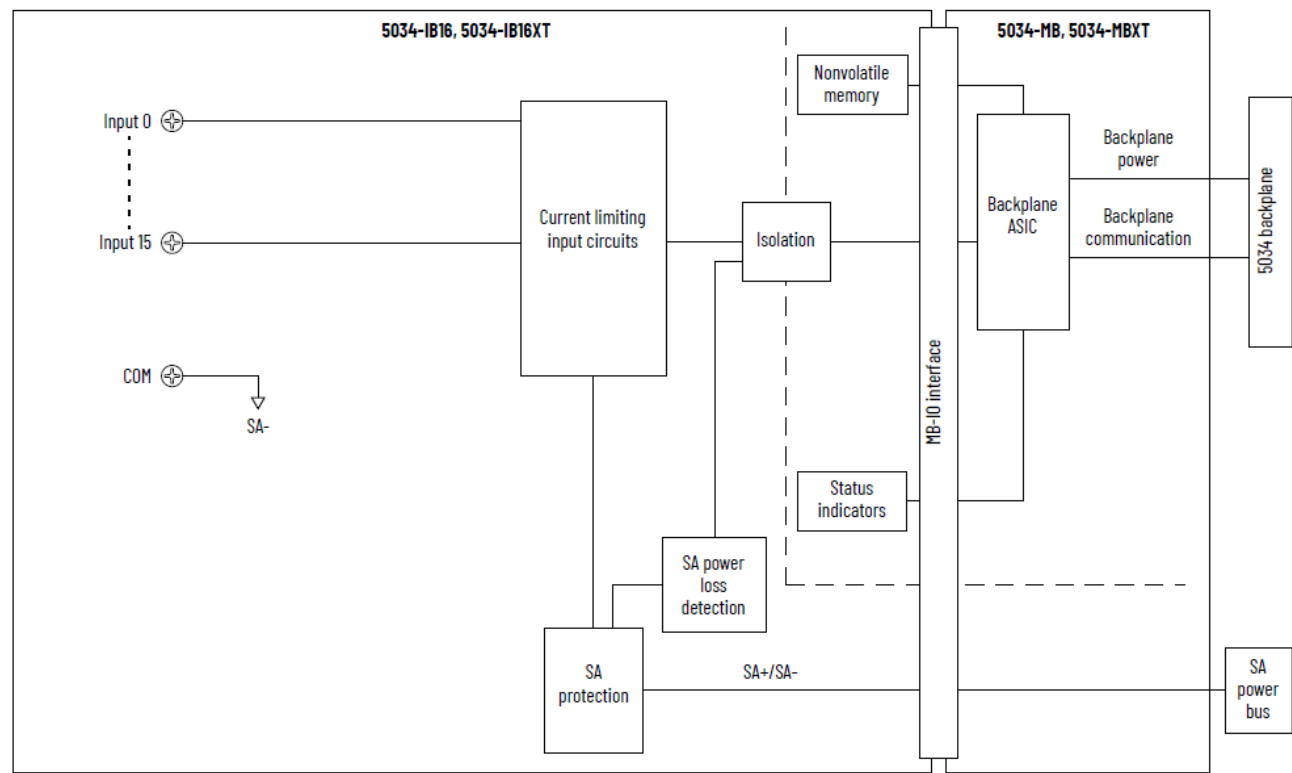


Table 10. Technical Specifications - 5034-IB16, 5034-IB16XT

| Attribute                                  | 5034-IB16, 5034-IB16XT |
|--------------------------------------------|------------------------|
| On-state voltage range                     | 10...30V DC            |
| On-state current, min                      | 2 mA                   |
| On-state current, nom                      | 2.4 mA                 |
| On-state current, max                      | 2.8 mA                 |
| Off-state voltage, max                     | 5V DC                  |
| Off-state current, max                     | 1.5 mA                 |
| Input impedance, min                       | 3.57 kΩ @ 10V DC       |
| Input impedance, nom                       | 10 kΩ @ 24V DC         |
| Input impedance, max                       | 15 kΩ @ 30V DC         |
| Input delay time (screw to backplane), max | 150 μs                 |
| Off-to-On                                  |                        |
| On-to-Off                                  |                        |
| Input pulse width, min                     | 125 μs                 |
| Off-to-On                                  |                        |

**Table 10. Technical Specifications - 5034-IB16, 5034-IB16XT (continued)**

| Attribute                                | 5034-IB16, 5034-IB16XT                                                                                                              |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| On-to-Off                                |                                                                                                                                     |
| Input filter time                        | 0 $\mu$ s, 100 $\mu$ s, 200 $\mu$ s, 500 $\mu$ s, 1 ms (Default), 2 ms, 5 ms, 10 ms, 20 ms, 50 ms                                   |
| Off-to-On                                |                                                                                                                                     |
| On-to-Off                                |                                                                                                                                     |
| Simple counters, counter frequency       | 0...f <sub>max</sub> = 4000 Hz<br>4 (with 12 points as standard inputs) or 8 (with 8 points as standard inputs)<br>Point 0...7 only |
| Timestamp of inputs (sequence of events) | Yes, $\pm 100$ $\mu$ s accuracy                                                                                                     |
| Events                                   | Not supported                                                                                                                       |

**Table 11. General Specifications - 5034-IB16, 5034-IB16XT**

| Attribute                               | 5034-IB16, 5034-IB16XT                                                                                                                          |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of inputs                        | 16 channels (1 group of 16), sinking                                                                                                            |
| Voltage category                        | 12/24V DC sink                                                                                                                                  |
| Input voltage, nom                      | 24V DC                                                                                                                                          |
| Input voltage range                     | 10...30V DC                                                                                                                                     |
| SA power voltage, nom                   | 24V DC                                                                                                                                          |
| SA power voltage range                  | 10...30V DC                                                                                                                                     |
| SA power current, nom                   | 20 mA                                                                                                                                           |
| SA power current, max                   | 0.1 A                                                                                                                                           |
| SA power current at no load             | 10 mA                                                                                                                                           |
| SA reverse polarity protection          | Yes                                                                                                                                             |
| Power dissipation, max <sup>(1)</sup>   | 1.45 W                                                                                                                                          |
| Thermal dissipation, max <sup>(1)</sup> | 4.95 BTU/hr                                                                                                                                     |
| Isolation voltage                       | 250V (continuous), Basic Insulation Type, System to Field<br>No isolation between SA power and inputs<br>No isolation between individual inputs |
| RIUP support                            | Yes                                                                                                                                             |

**Table 11. General Specifications - 5034-IB16, 5034-IB16XT (continued)**


| Attribute                      | 5034-IB16, 5034-IB16XT                                                                                                                                   |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| CIP Sync                       | Yes, slave only ordinary clock                                                                                                                           |
| Electronic keying              | Electronic keying via programming software                                                                                                               |
| RTB key positions (slot)       | 1, 4, 11                                                                                                                                                 |
| RTB supported                  | 5034-RTB18, 5034-RTB18S                                                                                                                                  |
| Wiring category <sup>(2)</sup> | 2 - Signal ports<br>2 - Power ports                                                                                                                      |
| Wiring specification           | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Indicators                     | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>16 yellow I/O status indicators                                          |
| Dimensions (HxWxD), approx     | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                          |
| Weight, approx                 | 43.0 g (1.52 oz.) - 5034-IB16<br>45.0 g (1.59 oz.) - 5034-IB16XT                                                                                         |
| Enclosure type                 | None (Open-style)                                                                                                                                        |
| North American temp code       | T4                                                                                                                                                       |
| UKEX/ATEX temp code            | T4                                                                                                                                                       |
| IECEx temp code                | T4                                                                                                                                                       |

(1) Value is measured at 60 °C (140 °F). Power dissipation varies with temperature.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.


# 5034-IB8 and 5034-IB8XT Digital 8 Input Modules

Figure 10. 5034-IB8 and 5034-IB8XT Wiring Diagram

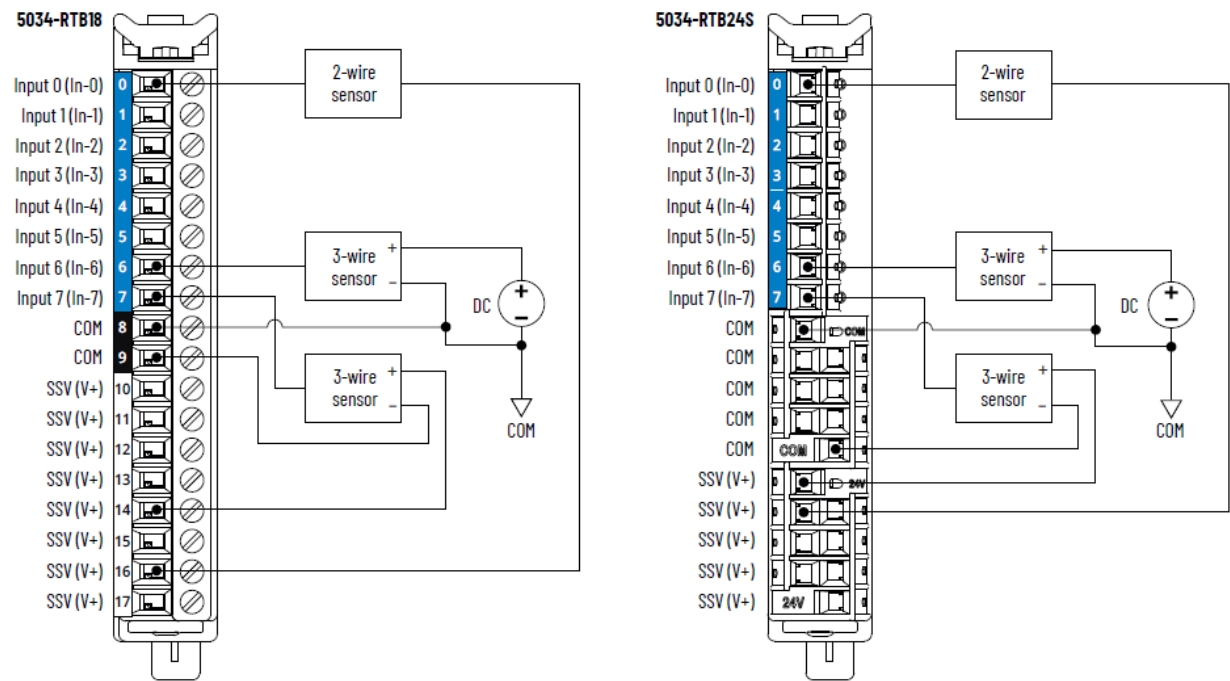

To establish more COM/V+ connections, use a 5034-RTB24S, or install a 5034-MBPTM or 5034-MBPTMXT next to the module.

Figure 11. 5034-IB8 and 5034-IB8XT Functional Block Diagram

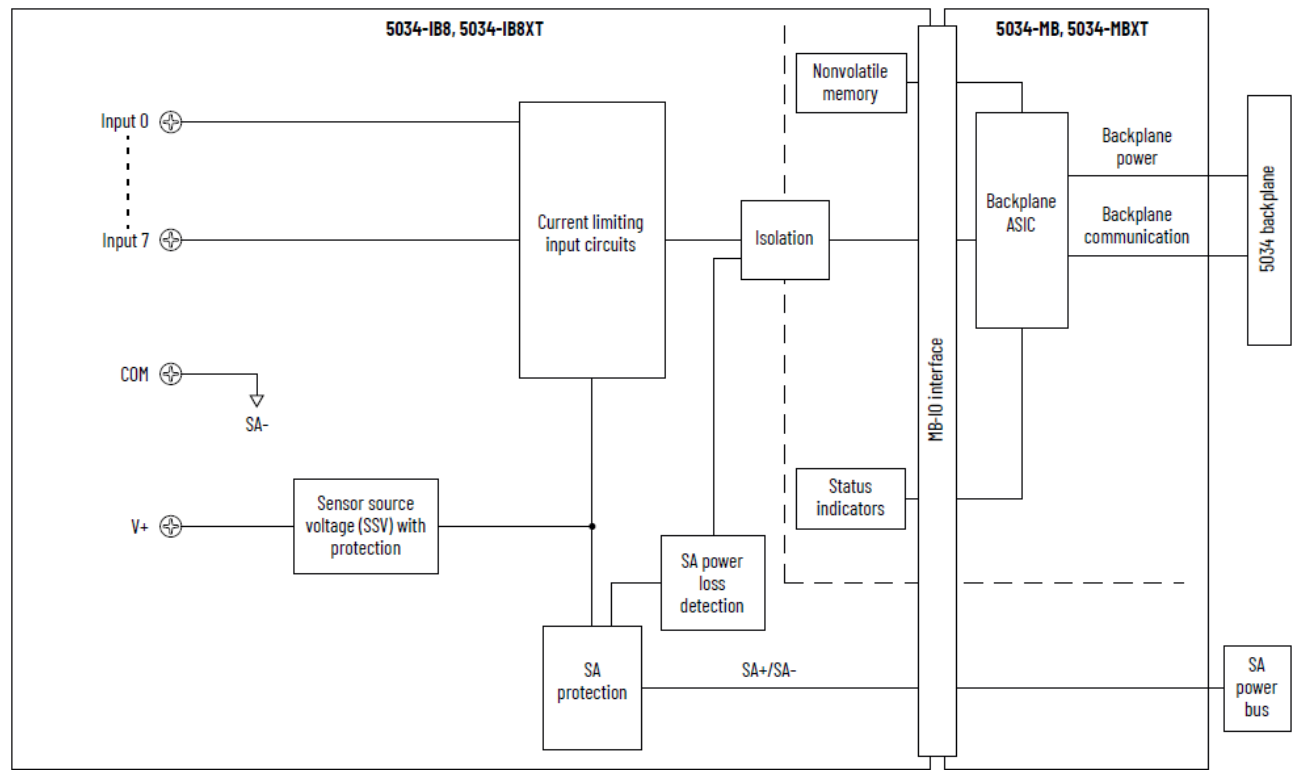

**Table 12. Technical Specifications - 5034-IB8, 5034-IB8XT**

| Attribute                                                            | 5034-IB8, 5034-IB8XT                                                                              |
|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| On-state voltage range                                               | 10...30V DC                                                                                       |
| On-state current, min                                                | 2 mA                                                                                              |
| On-state current, nom                                                | 2.4 mA                                                                                            |
| On-state current, max                                                | 2.8 mA                                                                                            |
| Off-state voltage, max                                               | 5V DC                                                                                             |
| Off-state current, max                                               | 1.5 mA                                                                                            |
| Input impedance, min                                                 | 3.57 k $\Omega$ @ 10V DC                                                                          |
| Input impedance, nom                                                 | 10 k $\Omega$ @ 24V DC                                                                            |
| Input impedance, max                                                 | 15 k $\Omega$ @ 30V DC                                                                            |
| Input delay time (screw to backplane), max<br>Off-to-On<br>On-to-Off | 150 $\mu$ s                                                                                       |
| Input pulse width, min<br>Off-to-On<br>On-to-Off                     | 125 $\mu$ s                                                                                       |
| Input filter time<br>Off-to-On<br>On-to-Off                          | 0 $\mu$ s, 100 $\mu$ s, 200 $\mu$ s, 500 $\mu$ s, 1 ms (Default), 2 ms, 5 ms, 10 ms, 20 ms, 50 ms |
| Simple counters, counter frequency                                   | 0...f <sub>max</sub> = 4000 Hz<br>4 (with 4 points as standard inputs)<br>Point 0...3 only        |
| Timestamp of inputs (sequence of events)                             | Yes, $\pm$ 100 $\mu$ s accuracy                                                                   |
| Events                                                               | Not supported                                                                                     |

**Table 13. General Specifications - 5034-IB8, 5034-IB8XT**

| Attribute          | 5034-IB8, 5034-IB8XT               |
|--------------------|------------------------------------|
| Number of inputs   | 8 channels (1 group of 8), sinking |
| Voltage category   | 12/24V DC sink                     |
| Input voltage, nom | 24V DC                             |

**Table 13. General Specifications - 5034-IB8, 5034-IB8XT (continued)**

| Attribute                               | 5034-IB8, 5034-IB8XT                                                                                                                                     |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input voltage range                     | 10...30V DC                                                                                                                                              |
| SA power voltage, nom                   | 24V DC                                                                                                                                                   |
| SA power voltage range                  | 10...30V DC                                                                                                                                              |
| SA power current, nom                   | 250 mA                                                                                                                                                   |
| SA power current, max                   | 0.3 A                                                                                                                                                    |
| SA power current at no load             | 10 mA                                                                                                                                                    |
| SA reverse polarity protection          | Yes                                                                                                                                                      |
| SSV voltage range                       | Follow SA supply                                                                                                                                         |
| SSV current, max                        | 0.2 A                                                                                                                                                    |
| SSV short-circuit protection            | Yes                                                                                                                                                      |
| Power dissipation, max <sup>(1)</sup>   | 1.15 W                                                                                                                                                   |
| Thermal dissipation, max <sup>(1)</sup> | 3.92 BTU/hr                                                                                                                                              |
| Isolation voltage                       | 250V (continuous), Basic Insulation Type, System to Field<br>No isolation between SA power and inputs<br>No isolation between individual inputs          |
| RIUP support                            | Yes                                                                                                                                                      |
| CIP Sync                                | Yes, slave only ordinary clock                                                                                                                           |
| Electronic keying                       | Electronic keying via programming software                                                                                                               |
| RTB key positions (slot)                | 1, 4, 8                                                                                                                                                  |
| RTB supported                           | 5034-RTB18, 5034-RTB18S, 5034-RTB24S                                                                                                                     |
| Wiring category <sup>(2)</sup>          | 2 - Signal ports<br>2 - Power ports                                                                                                                      |
| Wiring specification                    | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Indicators                              | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>8 yellow I/O status indicators                                           |
| Dimensions (HxWxD), approx              | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                          |

Table 13. General Specifications - 5034-IB8, 5034-IB8XT (continued)

| Attribute                | 5034-IB8, 5034-IB8XT                                           |
|--------------------------|----------------------------------------------------------------|
| Weight, approx           | 43.0 g (1.52 oz.) - 5034-IB8<br>46.0 g (1.62 oz.) - 5034-IB8XT |
| Enclosure type           | None (Open-style)                                              |
| North American temp code | T4                                                             |
| UKEX/ATEX temp code      | T4                                                             |
| IECEx temp code          | T4                                                             |

(1) Value is measured at 60 °C (140 °F). Power dissipation varies with temperature.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## 5034-OB16 and 5034-OB16XT Digital 16 Output Modules

Figure 12. 5034-OB16 and 5034-OB16XT Wiring Diagram

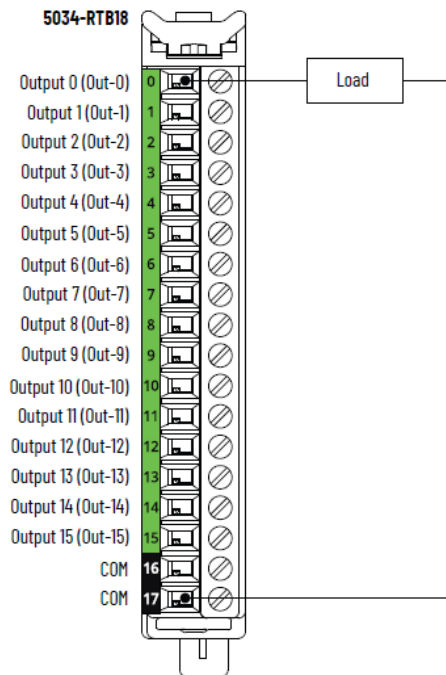


Figure 13. 5034-OB16 and 5034-OB16XT Functional Block Diagram

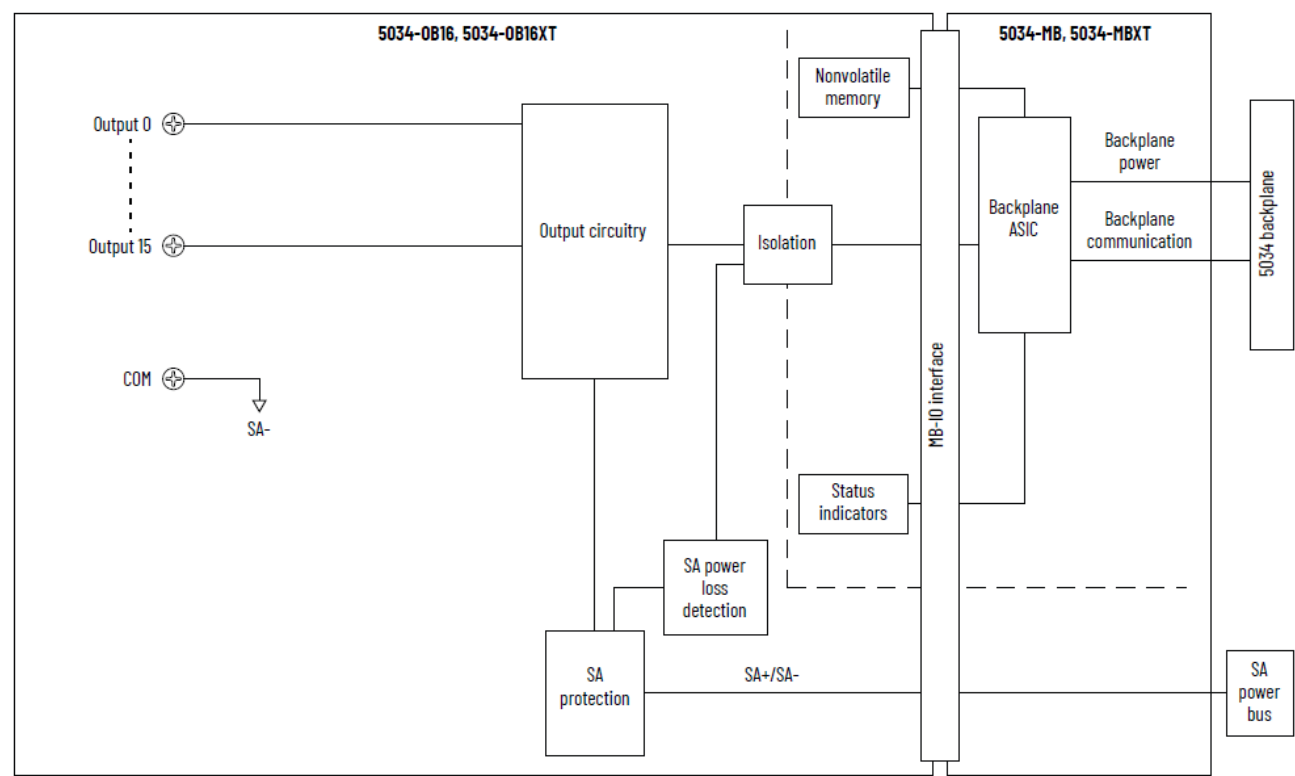


Table 14. Technical Specifications - 5034-OB16, 5034-OB16XT

| Attribute                                                                                        | 5034-OB16, 5034-OB16XT                |
|--------------------------------------------------------------------------------------------------|---------------------------------------|
| On-state voltage range                                                                           | 10...30V DC                           |
| On-state voltage drop, max                                                                       | 0.25V DC                              |
| On-state current per point, min                                                                  | 1 mA                                  |
| Off-state voltage, max<br>Off-state open wire detection disabled                                 | 5V DC with 1 mA min load              |
| Off-state voltage, max<br>Off-state open wire detection enabled                                  | 5V DC with 5 mA min load              |
| Off-state leakage current per point, max<br>Off-state open wire detection disabled               | 0.05 mA                               |
| Off-state leakage current per point, max <sup>(1)</sup><br>Off-state open wire detection enabled | 0.5 mA                                |
| Output current rating per point, max                                                             | 0.5 A                                 |
| Output current rating per module, max                                                            | 5 A                                   |
| Surge current per point, max                                                                     | 1.5 A for 10 ms, repeatable every 3 s |

**Table 14. Technical Specifications - 5034-OB16, 5034-OB16XT (continued)**

| Attribute                                                             | 5034-OB16, 5034-OB16XT                                     |
|-----------------------------------------------------------------------|------------------------------------------------------------|
| Fast inductive load turn-off                                          | Yes                                                        |
| Inductive load allowed, max                                           | 1.2 H                                                      |
| Output clamping voltage for inductive load when turn off              | SA voltage - 44V<br>Typical is -20V when SA voltage is 24V |
| Output delay time (backplane to screw), max<br>Off-to-On<br>On-to-Off | 120 $\mu$ s @ 0.5 A                                        |
| Pulse width, min                                                      | 200 $\mu$ s                                                |
| Open load detection diagnostics                                       | Yes, configurable (Default is off)                         |
| Output short circuit/overload detection                               | Yes                                                        |
| Output short circuit/overload protection                              | Yes                                                        |
| Pilot duty rating                                                     | 1.5 A inrush current, 0.5 A rated current, DC-14           |
| Output states in program mode per point                               | Hold Last State<br>On<br>Off (Default)                     |
| Output states in fault mode per point                                 | Hold Last State<br>On<br>Off (Default)                     |
| Duration of fault mode per point                                      | 1 s<br>2 s<br>5 s<br>10 s<br>Forever (Default)             |
| Output final state after fault mode per point                         | On<br>Off (Default)                                        |
| Scheduled outputs                                                     | Supported, accuracy $\pm 100$ $\mu$ s                      |

(1) Recommended Loading Resistor - To limit the effects of leakage current through solid-state outputs, you can connect a loading resistor in parallel with your load. For 24V DC operation, use a 5.6 k $\Omega$ , 0.5 W resistor for transistor operation.

**Table 15. General Specifications - 5034-OB16, 5034-OB16XT**

| Attribute                               | 5034-OB16, 5034-OB16XT                                                                                                                                   |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of outputs                       | 16 channels (1 group of 16), sourcing                                                                                                                    |
| Voltage category                        | 24V DC source                                                                                                                                            |
| Output voltage, nom                     | 24V DC                                                                                                                                                   |
| Output voltage range                    | 10...30V DC                                                                                                                                              |
| SA power voltage, nom                   | 24V DC                                                                                                                                                   |
| SA power voltage range                  | 10...30V DC                                                                                                                                              |
| SA power current, nom                   | 5.1 A                                                                                                                                                    |
| SA power current, max                   | 5.2 A                                                                                                                                                    |
| SA power current at no load             | 13 mA                                                                                                                                                    |
| SA reverse polarity protection          | Yes                                                                                                                                                      |
| Power dissipation, max <sup>(1)</sup>   | 1.02 W                                                                                                                                                   |
| Thermal dissipation, max <sup>(1)</sup> | 3.48 BTU/hr                                                                                                                                              |
| Isolation voltage                       | 250V (continuous), Basic Insulation Type, System to Field<br>No isolation between SA power and outputs<br>No isolation between individual outputs        |
| RIUP support                            | Yes                                                                                                                                                      |
| CIP Sync                                | Yes, slave only ordinary clock                                                                                                                           |
| Electronic keying                       | Electronic keying via programming software                                                                                                               |
| RTB key positions (slot)                | 1, 5, 11                                                                                                                                                 |
| RTB supported                           | 5034-RTB18, 5034-RTB18S                                                                                                                                  |
| Wiring category <sup>(2)</sup>          | 2 - Signal ports<br>2 - Power ports                                                                                                                      |
| Wiring specification                    | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Indicators                              | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>16 yellow/red I/O status indicators                                      |
| Dimensions (HxWxD), approx              | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                          |

Table 15. General Specifications - 5034-OB16, 5034-OB16XT (continued)

| Attribute                | 5034-OB16, 5034-OB16XT                                           |
|--------------------------|------------------------------------------------------------------|
| Weight, approx           | 43.0 g (1.52 oz.) - 5034-OB16<br>45.0 g (1.59 oz.) - 5034-OB16XT |
| Enclosure type           | None (Open-style)                                                |
| North American temp code | T4                                                               |
| UKEX/ATEX temp code      | T4                                                               |
| IECEx temp code          | T4                                                               |

(1) Value is measured at 60 °C (140 °F). Power dissipation varies with temperature.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## 5034-OB8 and 5034-OB8XT Digital 8 Output Modules

Figure 14. 5034-OB8 and 5034-OB8XT Wiring Diagram

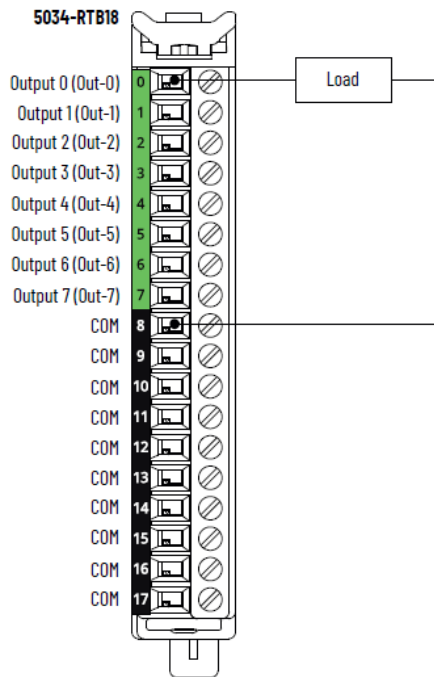


Figure 15. 5034-OB8 and 5034-OB8XT Wiring Diagram – Individual Load Return Wiring on COM Pins


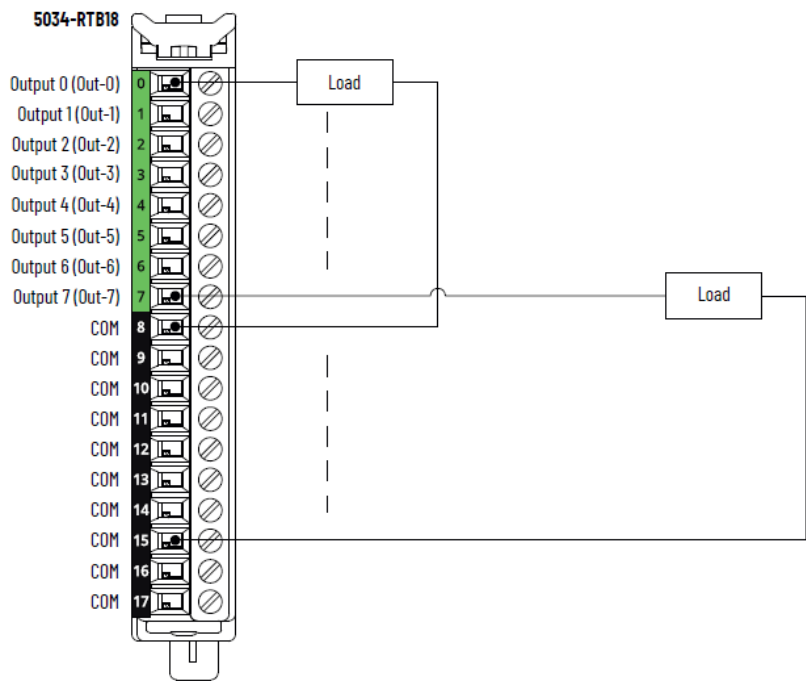


Figure 16. 5034-OB8 and 5034-OB8XT Wiring Diagram – Star-connected Load Return Wiring on COM Pins

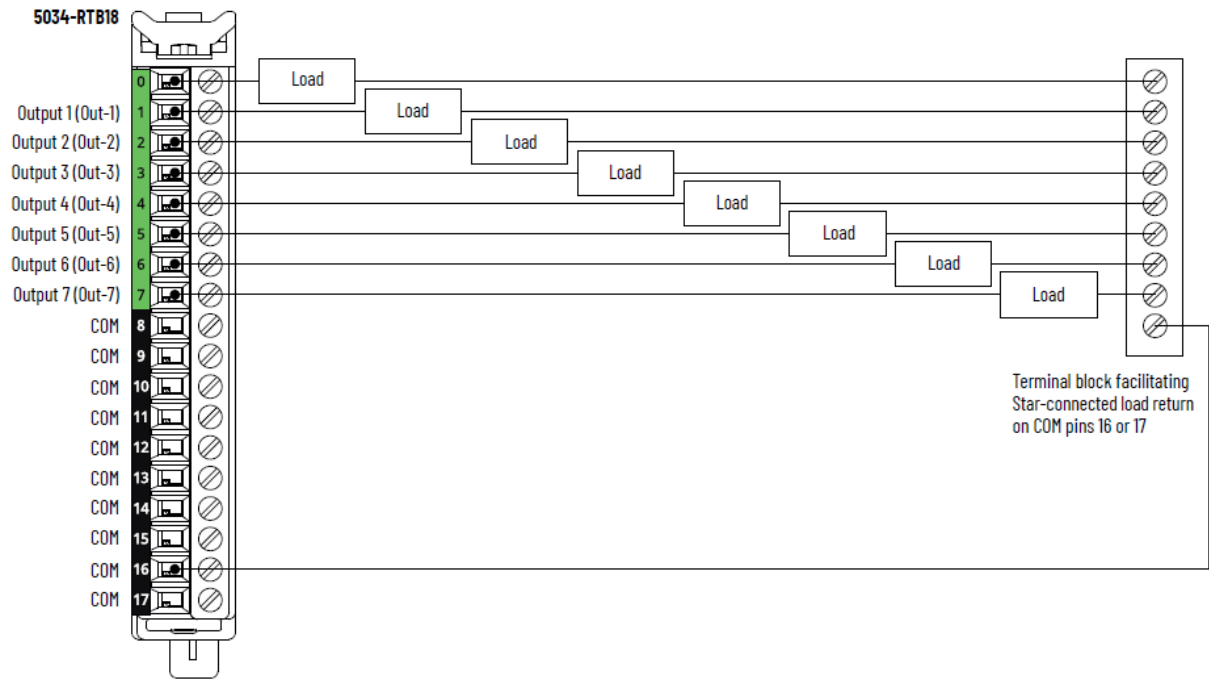

**IMPORTANT:** Use only COM pins 16 and 17 for the star-connected load return wiring.

Figure 17. 5034-OB8 and 5034-OB8XT Functional Block Diagram

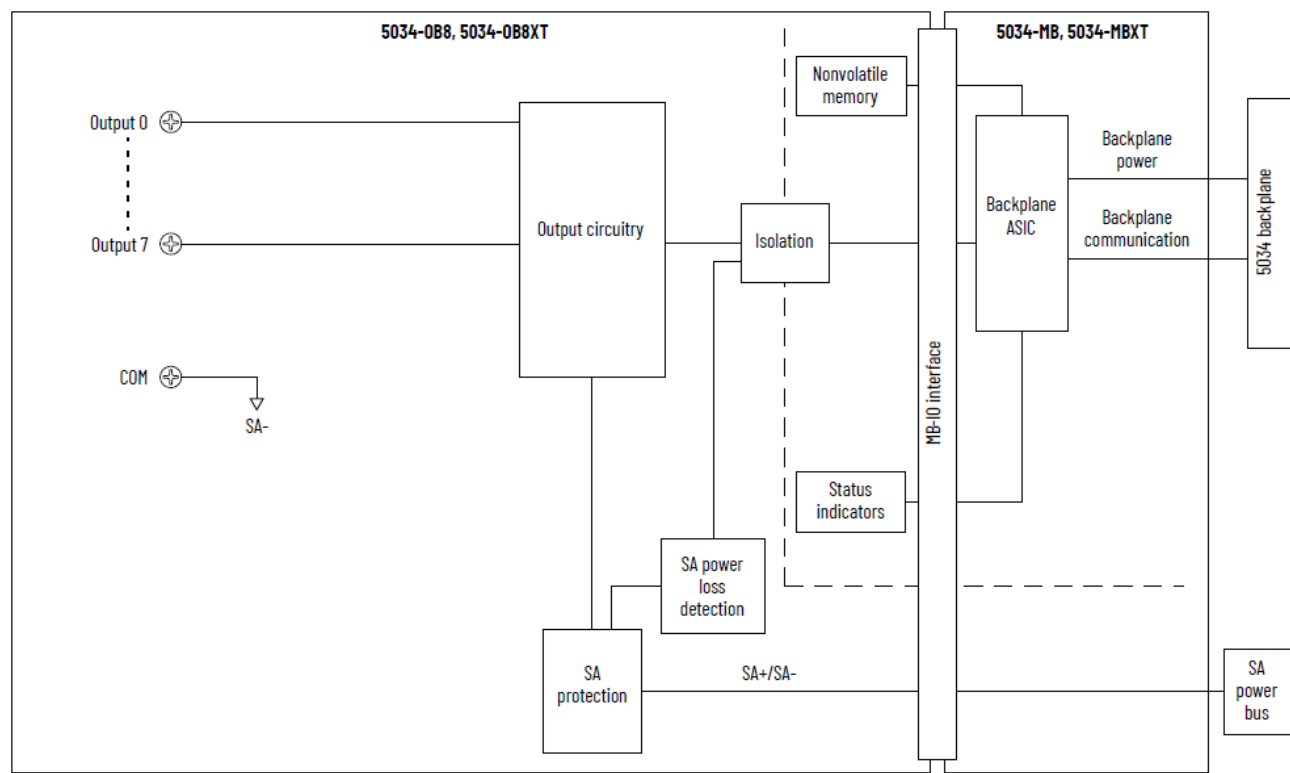


Table 16. Technical Specifications - 5034-OB8, 5034-OB8XT

| Attribute                                               | 5034-OB8, 5034-OB8XT                  |
|---------------------------------------------------------|---------------------------------------|
| On-state voltage range                                  | 10...30V DC                           |
| On-state voltage drop, max                              | 0.25V DC                              |
| On-state current per point, min                         | 1 mA                                  |
| Off-state voltage, max                                  | 5V DC with 1 mA min load              |
| Off-state open wire detection disabled                  |                                       |
| Off-state voltage, max                                  | 5V DC with 5 mA min load              |
| Off-state open wire detection enabled                   |                                       |
| Off-state leakage current per point, max                | 0.05 mA                               |
| Off-state open wire detection disabled                  |                                       |
| Off-state leakage current per point, max <sup>(1)</sup> | 0.5 mA                                |
| Off-state open wire detection enabled                   |                                       |
| Output current rating per point, max                    | 0.5 A                                 |
| Output current rating per module, max                   | 4 A                                   |
| Surge current per point, max                            | 1.5 A for 10 ms, repeatable every 3 s |

**Table 16. Technical Specifications - 5034-0B8, 5034-0B8XT (continued)**

| Attribute                                                             | 5034-0B8, 5034-0B8XT                                       |
|-----------------------------------------------------------------------|------------------------------------------------------------|
| Fast inductive load turn-off                                          | Yes                                                        |
| Inductive load allowed, max                                           | 1.2 H                                                      |
| Output clamping voltage for inductive load when turn off              | SA voltage - 44V<br>Typical is -20V when SA voltage is 24V |
| Output delay time (backplane to screw), max<br>Off-to-On<br>On-to-Off | 120 $\mu$ s @ 0.5 A                                        |
| Pulse width, min                                                      | 200 $\mu$ s                                                |
| Open load detection diagnostics                                       | Yes, configurable (Default is off)                         |
| Output short circuit/overload detection                               | Yes                                                        |
| Output short circuit/overload protection                              | Yes                                                        |
| Pilot duty rating                                                     | 1.5 A inrush current, 0.5 A rated current, DC-14           |
| Output states in program mode per point                               | Hold Last State<br>On<br>Off (Default)                     |
| Output states in fault mode per point                                 | Hold Last State<br>On<br>Off (Default)                     |
| Duration of fault mode per point                                      | 1 s<br>2 s<br>5 s<br>10 s<br>Forever (Default)             |
| Output final state after fault mode per point                         | On<br>Off (Default)                                        |
| Scheduled outputs                                                     | Supported, accuracy $\pm 100$ $\mu$ s                      |

(1) Recommended Loading Resistor - To limit the effects of leakage current through solid-state outputs, you can connect a loading resistor in parallel with your load. For 24V DC operation, use a 5.6 k $\Omega$ , 0.5 W resistor for transistor operation.

**Table 17. General Specifications - 5034-0B8, 5034-0B8XT**

| Attribute                               | 5034-0B8, 5034-0B8XT                                                                                                                                     |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of outputs                       | 8 channels (1 group of 8), sourcing                                                                                                                      |
| Voltage category                        | 24V DC source                                                                                                                                            |
| Output voltage, nom                     | 24V DC                                                                                                                                                   |
| Output voltage range                    | 10...30V DC                                                                                                                                              |
| SA power voltage, nom                   | 24V DC                                                                                                                                                   |
| SA power voltage range                  | 10...30V DC                                                                                                                                              |
| SA power current, nom                   | 4.1 A                                                                                                                                                    |
| SA power current, max                   | 4.2 A                                                                                                                                                    |
| SA power current at no load             | 12 mA                                                                                                                                                    |
| SA reverse polarity protection          | Yes                                                                                                                                                      |
| Power dissipation, max <sup>(1)</sup>   | 0.91 W                                                                                                                                                   |
| Thermal dissipation, max <sup>(1)</sup> | 3.11 BTU/hr                                                                                                                                              |
| Isolation voltage                       | 250V (continuous), Basic Insulation Type, System to Field<br>No isolation between SA power and outputs<br>No isolation between individual outputs        |
| RIUP support                            | Yes                                                                                                                                                      |
| CIP Sync                                | Yes, slave only ordinary clock                                                                                                                           |
| Electronic keying                       | Electronic keying via programming software                                                                                                               |
| RTB key positions (slot)                | 1, 5, 11                                                                                                                                                 |
| RTB supported                           | 5034-RTB18, 5034-RTB18S                                                                                                                                  |
| Wiring category <sup>(2)</sup>          | 2 - Signal ports<br>2 - Power ports                                                                                                                      |
| Wiring specification                    | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Indicators                              | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>8 yellow/red I/O status indicators                                       |
| Dimensions (HxWxD), approx              | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                          |

Table 17. General Specifications - 5034-OB8, 5034-OB8XT (continued)

| Attribute                | 5034-OB8, 5034-OB8XT                                           |
|--------------------------|----------------------------------------------------------------|
| Weight, approx           | 43.0 g (1.52 oz.) - 5034-OB8<br>45.0 g (1.59 oz.) - 5034-OB8XT |
| Enclosure type           | None (Open-style)                                              |
| North American temp code | T4                                                             |
| UKEX/ATEX temp code      | T4                                                             |
| IECEx temp code          | T4                                                             |

(1) Value is measured at 60 °C (140 °F). Power dissipation varies with temperature.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## 5034-OB4 and 5034-OB4XT Digital 4 Output 2 A Modules

Figure 18. 5034-OB4 and 5034-OB4XT Wiring Diagram

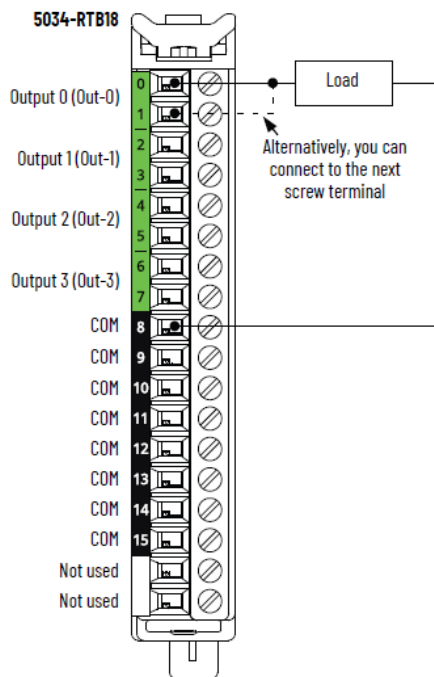


Figure 19. 5034-OB4 and 5034-OB4XT Functional Block Diagram

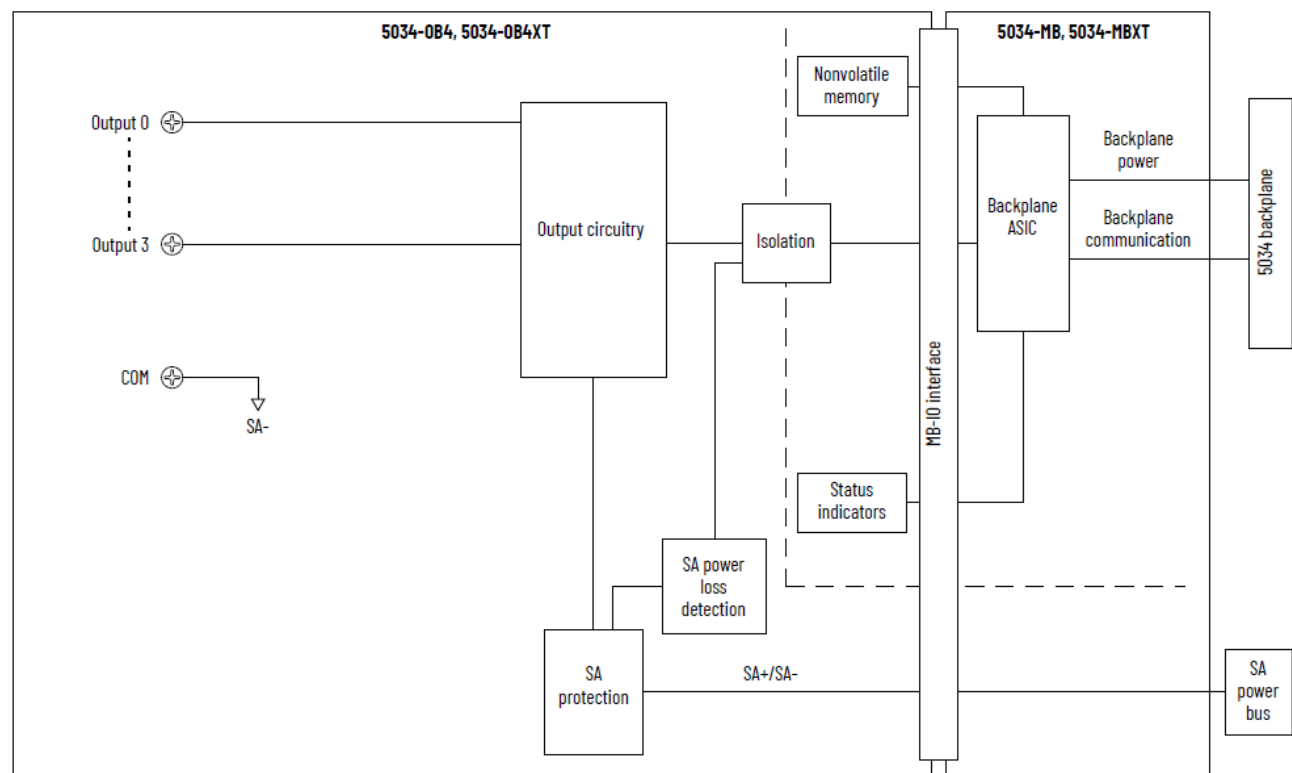


Table 18. Technical Specifications - 5034-OB4, 5034-OB4XT

| Attribute                                               | 5034-OB4, 5034-OB4XT                  |
|---------------------------------------------------------|---------------------------------------|
| On-state voltage range                                  | 10...30V DC                           |
| On-state voltage drop, max                              | 0.25V DC                              |
| On-state current per point, min                         | 1 mA                                  |
| Off-state voltage, max                                  | 5V DC with 1 mA min load              |
| Off-state open wire detection disabled                  |                                       |
| Off-state voltage, max                                  | 5V DC with 5 mA min load              |
| Off-state open wire detection enabled                   |                                       |
| Off-state leakage current per point, max                | 0.05 mA                               |
| Off-state open wire detection disabled                  |                                       |
| Off-state leakage current per point, max <sup>(1)</sup> | 0.5 mA                                |
| Off-state open wire detection enabled                   |                                       |
| Output current rating per point, max                    | 2 A                                   |
| Output current rating per module, max                   | 6 A                                   |
| Surge current per point, max                            | 3.0 A for 10 ms, repeatable every 3 s |

**Table 18. Technical Specifications - 5034-0B4, 5034-0B4XT (continued)**

| Attribute                                                             | 5034-0B4, 5034-0B4XT                                       |
|-----------------------------------------------------------------------|------------------------------------------------------------|
| Fast inductive load turn-off                                          | Yes                                                        |
| Inductive load allowed, max                                           | 1.2 H                                                      |
| Output clamping voltage for inductive load when turn off              | SA voltage - 44V<br>Typical is -20V when SA voltage is 24V |
| Output delay time (backplane to screw), max<br>Off-to-On<br>On-to-Off | 200 $\mu$ s @ 2 A                                          |
| Pulse width, min                                                      | 200 $\mu$ s                                                |
| Open load detection diagnostics                                       | Yes, configurable (Default is off)                         |
| Output short circuit/overload detection                               | Yes                                                        |
| Output short circuit/overload protection                              | Yes                                                        |
| Pilot duty rating                                                     | 3 A inrush current, 2 A rated current, DC-14               |
| Output states in program mode per point                               | Hold Last State<br>On<br>Off (Default)                     |
| Output states in fault mode per point                                 | Hold Last State<br>On<br>Off (Default)                     |
| Duration of fault mode per point                                      | 1 s<br>2 s<br>5 s<br>10 s<br>Forever (Default)             |
| Output final state after fault mode per point                         | On<br>Off (Default)                                        |
| Scheduled outputs                                                     | Not supported                                              |

(1) Recommended Loading Resistor - To limit the effects of leakage current through solid-state outputs, you can connect a loading resistor in parallel with your load. For 24V DC operation, use a 5.6 k $\Omega$ , 0.5 W resistor for transistor operation.

**Table 19. General Specifications - 5034-0B4, 5034-0B4XT**

| Attribute                               | 5034-0B4, 5034-0B4XT                                                                                                                                     |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of outputs                       | 4 channels (1 group of 4), sourcing                                                                                                                      |
| Voltage category                        | 24V DC source                                                                                                                                            |
| Output voltage, nom                     | 24V DC                                                                                                                                                   |
| Output voltage range                    | 10...30V DC                                                                                                                                              |
| SA power voltage, nom                   | 24V DC                                                                                                                                                   |
| SA power voltage range                  | 10...30V DC                                                                                                                                              |
| SA power current, nom                   | 6.1 A                                                                                                                                                    |
| SA power current, max                   | 6.2 A                                                                                                                                                    |
| SA power current at no load             | 9 mA                                                                                                                                                     |
| SA reverse polarity protection          | Yes                                                                                                                                                      |
| Power dissipation, max <sup>(1)</sup>   | 1.88 W                                                                                                                                                   |
| Thermal dissipation, max <sup>(1)</sup> | 6.41 BTU/hr                                                                                                                                              |
| Isolation voltage                       | 250V (continuous), Basic Insulation Type, System to Field<br>No isolation between SA power and outputs<br>No isolation between individual outputs        |
| RIUP support                            | Yes                                                                                                                                                      |
| CIP Sync                                | Slave only ordinary clock                                                                                                                                |
| Electronic keying                       | Electronic keying via programming software                                                                                                               |
| RTB key positions (slot)                | 1, 7, 11                                                                                                                                                 |
| RTB supported                           | 5034-RTB18, 5034-RTB18S                                                                                                                                  |
| Wiring category <sup>(2)</sup>          | 2 - Signal ports<br>2 - Power ports                                                                                                                      |
| Wiring specification                    | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Indicators                              | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>4 yellow/red I/O status indicators                                       |
| Dimensions (HxWxD), approx              | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                          |

Table 19. General Specifications - 5034-OB4, 5034-OB4XT (continued)

| Attribute                | 5034-OB4, 5034-OB4XT                                           |
|--------------------------|----------------------------------------------------------------|
| Weight, approx           | 45.0 g (1.59 oz.) - 5034-OB4<br>47.0 g (1.66 oz.) - 5034-OB4XT |
| Enclosure type           | None (Open-style)                                              |
| North American temp code | T4                                                             |
| UKEX/ATEX temp code      | T4                                                             |
| IECEx temp code          | T4                                                             |

(1) Value is measured at 60 °C (140 °F). Power dissipation varies with temperature.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## 5034-OW4I and 5034-OW4IXT Relay 4 Output Isolated 2 A Modules

Figure 20. 5034-OW4I and 5034-OW4IXT Wiring Diagram

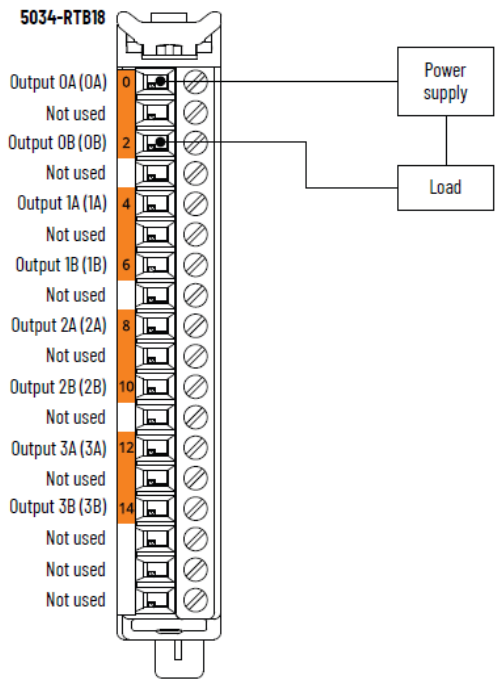


Figure 21. 5034-0W4I and 5034-0W4IXT Functional Block Diagram

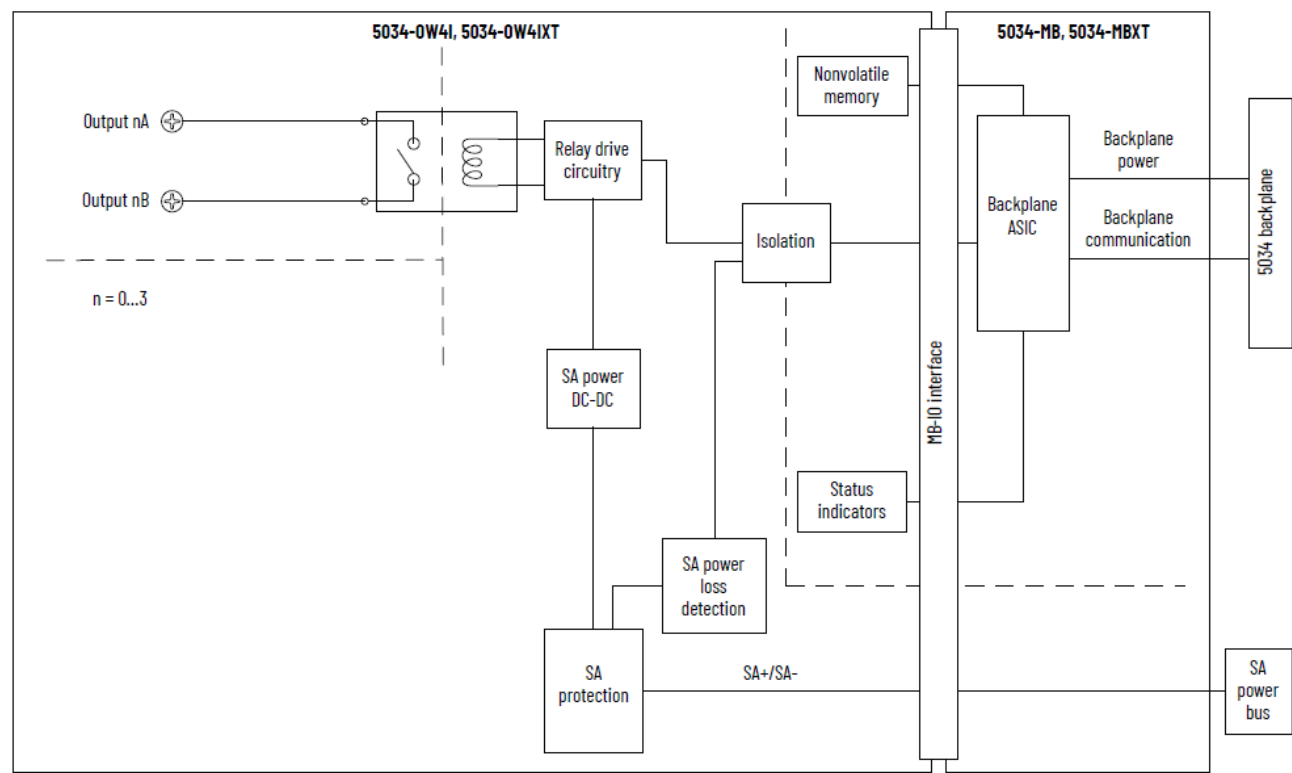


Table 20. Technical Specifications - 5034-0W4I, 5034-0W4IXT

| Attribute                                                             | 5034-0W4I, 5034-0W4IXT                                                                                                       |
|-----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Relay rating <sup>(1)</sup>                                           | 2 A resistive/channel @ 5...30V DC<br>2 A resistive/channel @ 120V AC, 50/60 Hz<br>2 A resistive/channel @ 240V AC, 50/60 Hz |
| Off-state leakage                                                     | 0 mA<br>Dry contact, no onboard snubbers                                                                                     |
| Output current rating, max                                            | 2 A resistive/channel @ 5...30V DC<br>2 A resistive/channel @ 120V AC, 50/60 Hz<br>2 A resistive/channel @ 240V AC, 50/60 Hz |
| Output delay time (backplane to screw), max<br>Off-to-On<br>On-to-Off | 10 ms                                                                                                                        |
| Initial contact resistance, max                                       | 30 mΩ                                                                                                                        |
| Output states in program mode per point                               | Hold Last State<br>On<br>Off (Default)                                                                                       |

**Table 20. Technical Specifications - 5034-0W4I, 5034-0W4IXT (continued)**

| Attribute                                     | 5034-0W4I, 5034-0W4IXT                                                                                                                                            |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Output states in fault mode per point         | Hold Last State<br>On<br>Off (Default)                                                                                                                            |
| Duration of fault mode per point              | 1 s<br>2 s<br>5 s<br>10 s<br>Forever (Default)                                                                                                                    |
| Output final state after fault mode per point | On<br>Off (Default)                                                                                                                                               |
| On-state current per point, min               | 100 $\mu$ A @ 100 mV DC                                                                                                                                           |
| Switching frequency, max                      | 1 operation/3 sec (0.3 Hz @ rated load)                                                                                                                           |
| Expected contact life, electrical             | 2 A, 240V AC (resistive): Min $1 \times 10^5$ operating cycles (@ 20 times/min)<br>2 A, 30V DC (resistive): Min $1 \times 10^5$ operating cycles (@ 20 times/min) |
| Expected contact life, mechanical             | Min $2 \times 10^7$ operating cycles (@ 180 times/min)                                                                                                            |
| Pilot duty rating                             | 5...240V AC, 50/60 Hz, C300 pilot duty per channel<br>5...125V DC, R150 pilot duty per channel                                                                    |

(1) Surge Suppression - Connecting surge suppressors across your external inductive load extends the life of the module. For additional details, see the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

**Table 21. General Specifications - 5034-0W4I, 5034-0W4IXT**

| Attribute                   | 5034-0W4I, 5034-0W4IXT    |
|-----------------------------|---------------------------|
| Number of outputs           | 4 Form A (normally open)  |
| Output voltage range        | 5...30V DC<br>5...240V AC |
| SA power voltage, nom       | 24V DC                    |
| SA power voltage range      | 10...30V DC               |
| SA power current, nom       | 100 mA                    |
| SA power current, max       | 200 mA                    |
| SA power current at no load | 3.0 mA                    |

**Table 21. General Specifications - 5034-0W4I, 5034-0W4IXT (continued)**

| Attribute                               | 5034-0W4I, 5034-0W4IXT                                                                                                                                                                                                                                          |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SA reverse polarity protection          | Yes                                                                                                                                                                                                                                                             |
| Power dissipation, max <sup>(1)</sup>   | 0.74 W                                                                                                                                                                                                                                                          |
| Thermal dissipation, max <sup>(1)</sup> | 2.52 BTU/hr                                                                                                                                                                                                                                                     |
| Isolation voltage                       | 250V (continuous), Basic Insulation Type, System to SA<br>250V (continuous), Reinforced Insulation Type, System to Channel<br>250V (continuous), Reinforced Insulation Type, SA to Channel<br>250V (continuous), Reinforced Insulation Type, Channel to Channel |
| RIUP support                            | Yes                                                                                                                                                                                                                                                             |
| Electronic keying                       | Electronic keying via programming software                                                                                                                                                                                                                      |
| RTB key positions (slot)                | 7, 12, 15                                                                                                                                                                                                                                                       |
| RTB supported                           | 5034-RTB18, 5034-RTB18S                                                                                                                                                                                                                                         |
| Wiring category <sup>(2)</sup>          | 2 - Signal ports<br>2 - Power ports                                                                                                                                                                                                                             |
| Wiring specification                    | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a>                                                                                                        |
| Indicators                              | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>4 yellow I/O status indicators                                                                                                                                                  |
| Dimensions (HxWxD), approx              | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                                                                                                                                 |
| Weight, approx                          | 53.0 g (1.87 oz.) - 5034-0W4I<br>55.0 g (1.94 oz.) - 5034-0W4IXT                                                                                                                                                                                                |
| Enclosure type                          | None (Open-style)                                                                                                                                                                                                                                               |
| North American temp code                | T4                                                                                                                                                                                                                                                              |
| UKEX/ATEX temp code                     | T4                                                                                                                                                                                                                                                              |
| IECEx temp code                         | T4                                                                                                                                                                                                                                                              |

(1) Value is measured at 60 °C (140 °F). Power dissipation varies with temperature.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

# 5034-UB8 and 5034-UB8XT Digital 8 Input/Output Modules

Figure 22. 5034-UB8 and 5034-UB8XT Wiring Diagram - Output Mode


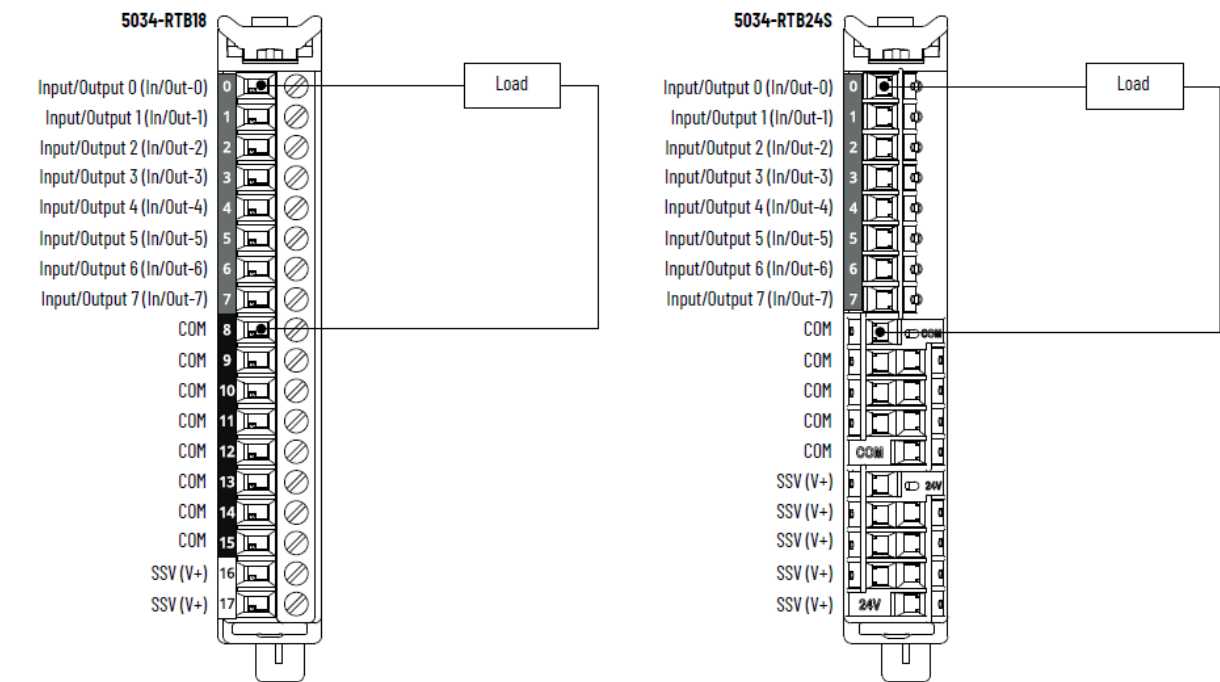


Figure 23. 5034-UB8 and 5034-UB8XT Wiring Diagram - Input Mode

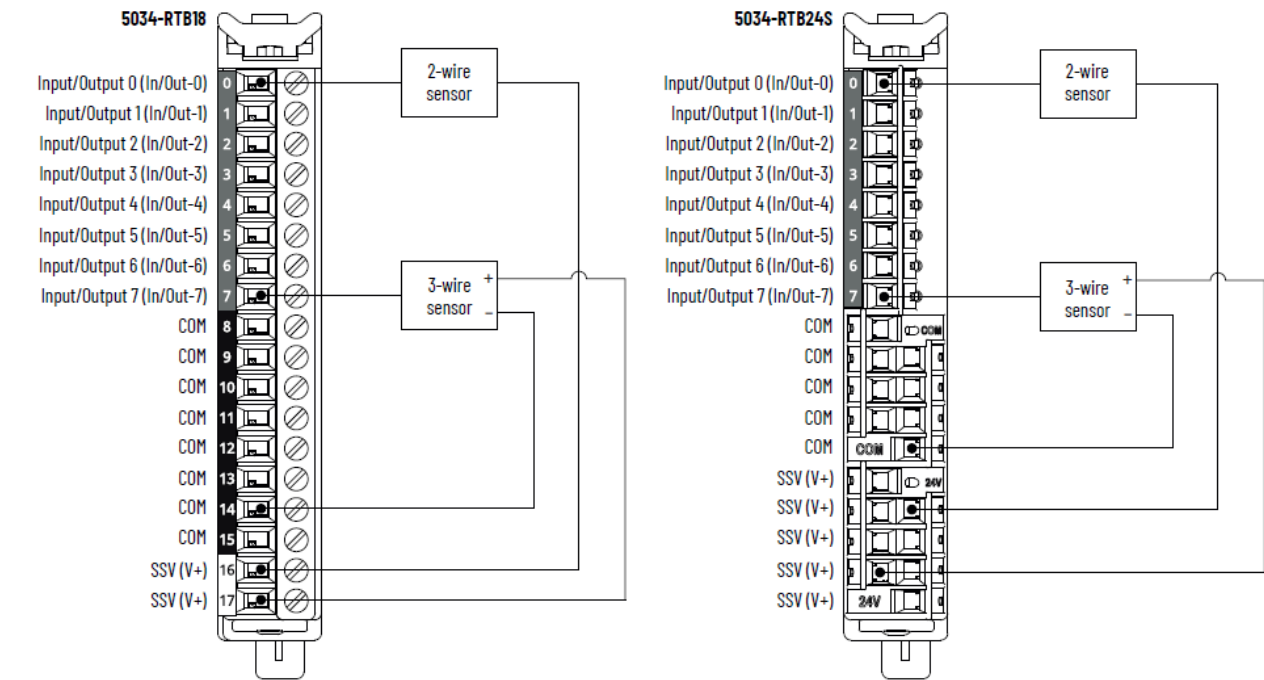

To establish more COM/V+ connections, especially in a mixed input/output configuration, use a 5034-RTB24S, or install a 5034-MBPTM or 5034-MBPTMXT next to the module.

Use SSV (V+) only for powering sensors that are interfaced with a point that is configured as a digital input mode.

Figure 24. 5034-UB8 and 5034-UB8XT Functional Block Diagram

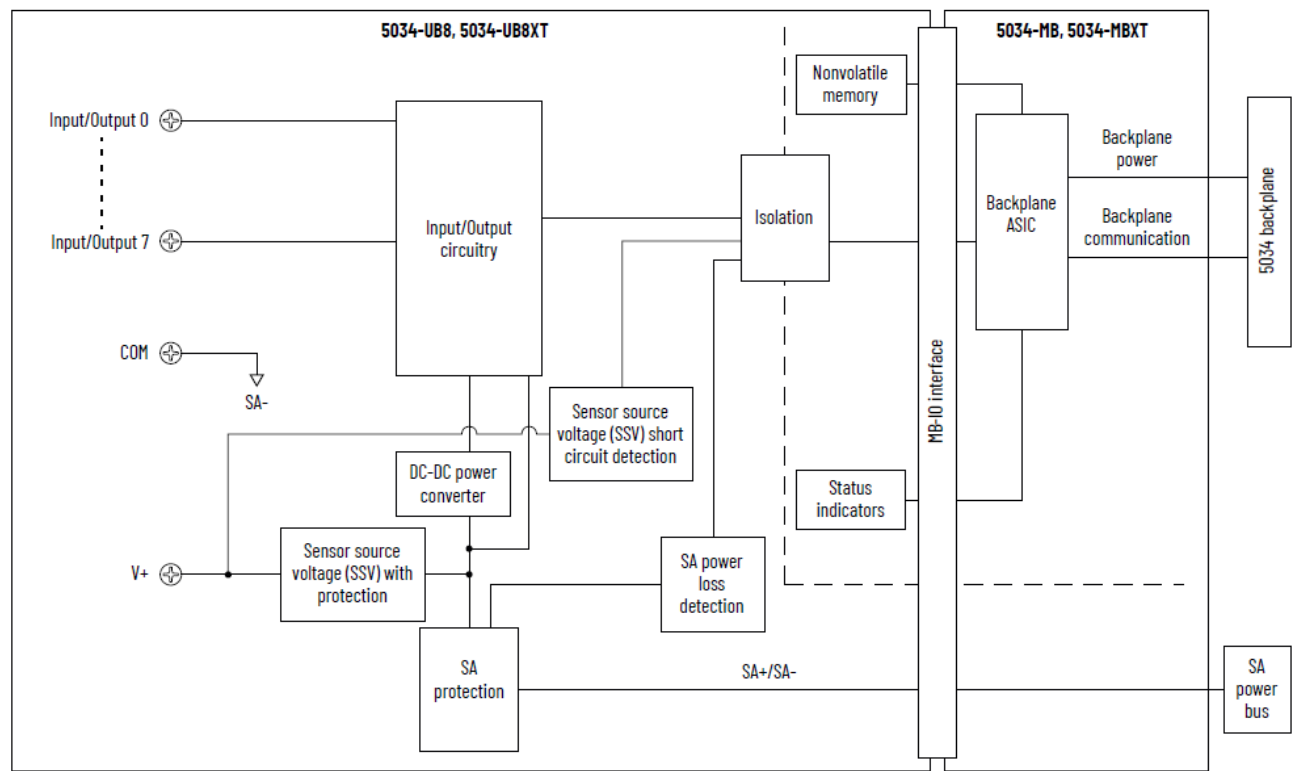


Table 22. Technical Specifications - 5034-UB8, 5034-UB8XT - Input

| Attribute                                  | 5034-UB8, 5034-UB8XT |
|--------------------------------------------|----------------------|
| On-state voltage range                     | 10...30V DC          |
| On-state current, min                      | 2 mA                 |
| On-state current, nom                      | 4.5 mA               |
| On-state current, max                      | 5 mA                 |
| Off-state voltage, max                     | 5V DC                |
| Off-state current, max                     | 1.5 mA               |
| Input impedance, min                       | 2 kΩ @ 10V DC        |
| Input impedance, nom                       | 5.3 kΩ @ 24V DC      |
| Input impedance, max                       | 15 kΩ @ 30V DC       |
| Input delay time (screw to backplane), max | 250 μs               |
| Off-to-On                                  |                      |
| On-to-Off                                  |                      |
| Input pulse width, min                     | 250 μs               |
| Off-to-On                                  |                      |

**Table 22. Technical Specifications - 5034-UB8, 5034-UB8XT - Input (continued)**

| Attribute                                | 5034-UB8, 5034-UB8XT                                                    |
|------------------------------------------|-------------------------------------------------------------------------|
| On-to-Off                                |                                                                         |
| Input filter time                        | 0 $\mu$ s, 500 $\mu$ s, 1 ms (Default), 2 ms, 5 ms, 10 ms, 20 ms, 50 ms |
| Off-to-On                                |                                                                         |
| On-to-Off                                |                                                                         |
| Simple counters, counter frequency       | 0...f <sub>max</sub> = 2000 Hz                                          |
| Timestamp of inputs (sequence of events) | Yes, $\pm$ 200 $\mu$ s accuracy                                         |
| Events                                   | Not supported                                                           |

**Table 23. Technical Specifications - 5034-UB8, 5034-UB8XT - Output**

| Attribute                                                | 5034-UB8, 5034-UB8XT                                                                                                                                                                                       |
|----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| On-state voltage range                                   | 10...30V DC                                                                                                                                                                                                |
| On-state voltage drop, max                               | 0.25V DC                                                                                                                                                                                                   |
| On-state current per point, min                          | 1.0 mA                                                                                                                                                                                                     |
| Off-state voltage, max                                   | 5V DC with 1 mA min load                                                                                                                                                                                   |
| Off-state open wire detection disabled                   |                                                                                                                                                                                                            |
| Off-state voltage, max                                   | 5V DC with 5 mA min load                                                                                                                                                                                   |
| Off-state open wire detection enabled                    |                                                                                                                                                                                                            |
| Off-state leakage current per point, max                 | 0.1 mA                                                                                                                                                                                                     |
| Off-state open wire detection disabled                   |                                                                                                                                                                                                            |
| Off-state leakage current per point, max <sup>(1)</sup>  | 0.5 mA                                                                                                                                                                                                     |
| Off-state open wire detection enabled                    |                                                                                                                                                                                                            |
| Output current rating per point, max                     | 0.5 A                                                                                                                                                                                                      |
| Output current rating per module, max                    | 4 A                                                                                                                                                                                                        |
| Surge current per point, max                             | 1.2 A for 10 ms, repeatable every 3 s                                                                                                                                                                      |
| Inductive load allowed, max                              | 1.2 H                                                                                                                                                                                                      |
| Output clamping voltage for inductive load when turn off | (SA voltage + VCL)...0<br>VCL value: Minimum is -63V, Typical is -55V, Maximum is -49V<br>For more information, see the PointMax Digital I/O Modules User Manual, publication <a href="#">5034-UM002</a> . |
| Output delay time (backplane to screw), max              | 150 $\mu$ s @ 0.5 A                                                                                                                                                                                        |
| Off-to-On                                                |                                                                                                                                                                                                            |

**Table 23. Technical Specifications - 5034-UB8, 5034-UB8XT - Output (continued)**

| Attribute                                     | 5034-UB8, 5034-UB8XT                             |
|-----------------------------------------------|--------------------------------------------------|
| On-to-Off                                     |                                                  |
| Pulse width, min                              | 200 $\mu$ s                                      |
| Scheduled outputs                             | Supported, accuracy $\pm 100$ $\mu$ s            |
| Open load detection diagnostics               | Yes, configurable (Default is off)               |
| Output short circuit/overload detection       | Yes                                              |
| Output short circuit/overload protection      | Yes                                              |
| Pilot duty rating                             | 1.2 A inrush current, 0.5 A rated current, DC-14 |
| Output states in program mode per point       | Hold Last State<br>On<br>Off (Default)           |
| Output states in fault mode per point         | Hold Last State<br>On<br>Off (Default)           |
| Duration of fault mode per point              | 1 s<br>2 s<br>5 s<br>10 s<br>Forever (Default)   |
| Output final state after fault mode per point | On<br>Off (Default)                              |

(1) Recommended Loading Resistor - To limit the effects of leakage current through solid-state outputs, you can connect a loading resistor in parallel with your load. For 24V DC operation, use a 5.6 k $\Omega$ , 0.5 W resistor for transistor operation.

**Table 24. General Specifications - 5034-UB8, 5034-UB8XT**

| Attribute                | 5034-UB8, 5034-UB8XT                                     |
|--------------------------|----------------------------------------------------------|
| Number of inputs/outputs | 8 channels, configurable, sinking input, sourcing output |
| SA power voltage, nom    | 24V DC                                                   |
| SA power voltage range   | 10...30V DC                                              |
| SA power current, nom    | 4.1 A                                                    |
| SA power current, max    | 4.2 A                                                    |

**Table 24. General Specifications - 5034-UB8, 5034-UB8XT (continued)**

| Attribute                               | 5034-UB8, 5034-UB8XT                                                                                                                                                    |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SA power current at no load             | 14 mA                                                                                                                                                                   |
| SA reverse polarity protection          | Yes                                                                                                                                                                     |
| SSV voltage range                       | Follow SA supply                                                                                                                                                        |
| SSV current, max                        | 0.8 A                                                                                                                                                                   |
| SSV short-circuit detection             | Yes                                                                                                                                                                     |
| Power dissipation, max <sup>(1)</sup>   | 1.36 W                                                                                                                                                                  |
| Thermal dissipation, max <sup>(1)</sup> | 4.63 BTU/hr                                                                                                                                                             |
| Isolation voltage                       | 250V (continuous), Basic Insulation Type, System to Field<br>No isolation between SA power and input/output ports<br>No isolation between individual input/output ports |
| RIUP support                            | Yes                                                                                                                                                                     |
| CIP Sync                                | Slave only ordinary clock                                                                                                                                               |
| Electronic keying                       | Electronic keying via programming software                                                                                                                              |
| RTB key positions (slot)                | 1, 5, 8                                                                                                                                                                 |
| RTB supported                           | 5034-RTB18, 5034-RTB18S, 5034-RTB24S                                                                                                                                    |
| Wiring category <sup>(2)</sup>          | 2 - Signal ports<br>2 - Power ports                                                                                                                                     |
| Wiring specification                    | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a>                |
| Indicators                              | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>8 yellow/red I/O status indicators                                                      |
| Dimensions (HxWxD), approx              | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                                         |
| Weight, approx                          | 45.0 g (1.59 oz.) - 5034-UB8<br>47.0 g (1.66 oz.) - 5034-UB8XT                                                                                                          |
| Enclosure type                          | None (Open-style)                                                                                                                                                       |
| North American temp code                | T4                                                                                                                                                                      |
| UKEX/ATEX temp code                     | T4                                                                                                                                                                      |

Table 24. General Specifications - 5034-UB8, 5034-UB8XT (continued)

| Attribute       | 5034-UB8, 5034-UB8XT |
|-----------------|----------------------|
| IECEx temp code | T4                   |

(1) Value is measured at 60 °C (140 °F). Power dissipation varies with temperature.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## 5034-UB8F and 5034-UB8FXT Fast Digital 8 Input/Output Modules

Figure 25. 5034-UB8F and 5034-UB8FXT Wiring Diagram - Output Mode


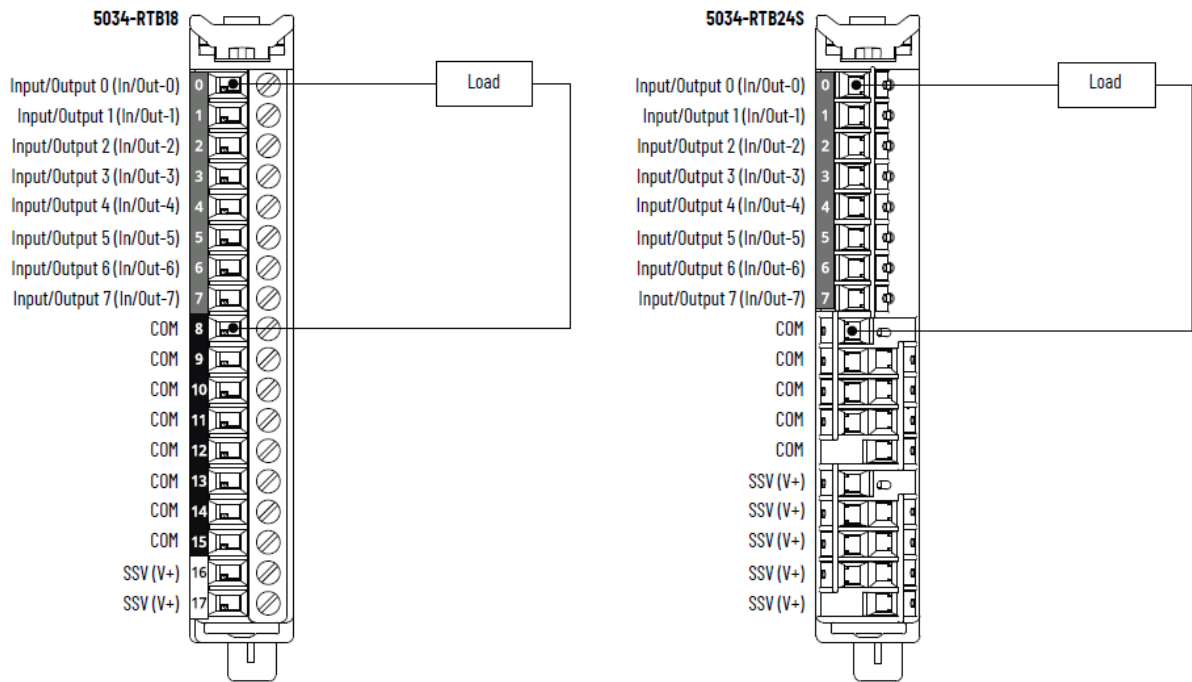



Figure 26. 5034-UB8F and 5034-UB8FXT Wiring Diagram - Input Mode

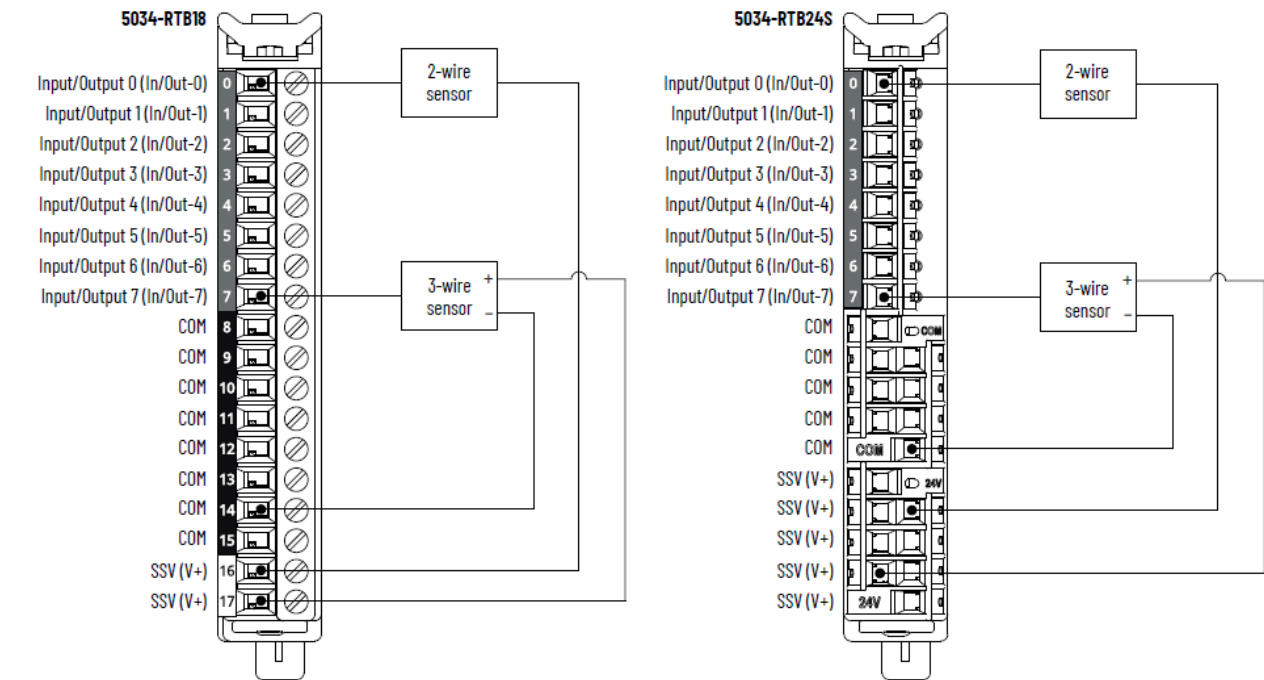

To establish more COM/V+ connections, especially in a mixed input/output configuration, use a 5034-RTB24S, or install a 5034-MBPTM or 5034-MBPTMXT next to the module.

Use SSV (V+) only for powering sensors that are interfaced with a point that is configured as a digital input mode.

Figure 27. 5034-UB8F and 5034-UB8FXT Functional Block Diagram

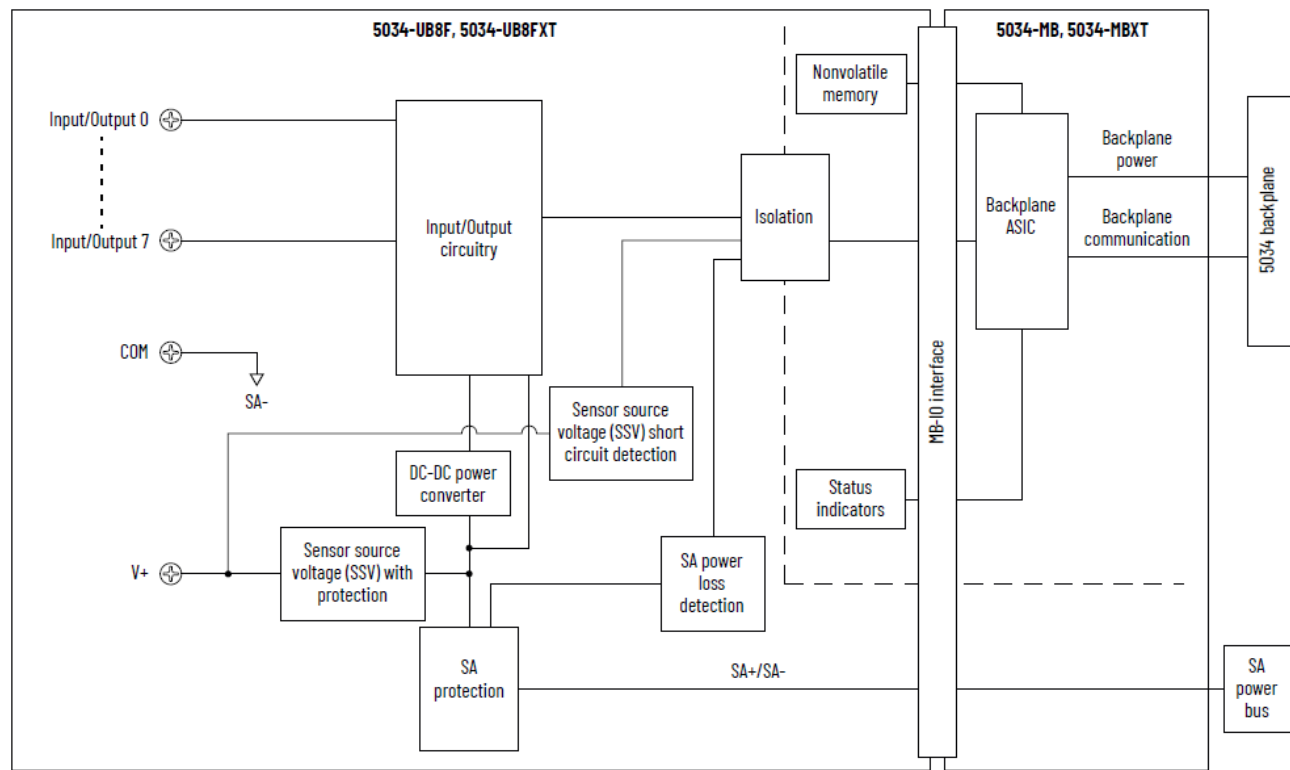

**Table 25. Technical Specifications - 5034-UB8F, 5034-UB8FXT - Input**

| Attribute                                                            | 5034-UB8F, 5034-UB8FXT                                                                                                                           |
|----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| On-state voltage range                                               | 10...30V DC                                                                                                                                      |
| On-state current, min                                                | 2 mA                                                                                                                                             |
| On-state current, nom                                                | 4.5 mA                                                                                                                                           |
| On-state current, max                                                | 5 mA                                                                                                                                             |
| Off-state voltage, max                                               | 5V DC                                                                                                                                            |
| Off-state current, max                                               | 1.5 mA                                                                                                                                           |
| Input impedance, min                                                 | 2 k $\Omega$ @ 10V DC                                                                                                                            |
| Input impedance, nom                                                 | 5.3 k $\Omega$ @ 24V DC                                                                                                                          |
| Input impedance, max                                                 | 15 k $\Omega$ @ 30V DC                                                                                                                           |
| Input delay time (screw to backplane), max<br>Off-to-On<br>On-to-Off | 40 $\mu$ s                                                                                                                                       |
| Input pulse width, min<br>Off-to-On<br>On-to-Off                     | 10 $\mu$ s                                                                                                                                       |
| Input filter time<br>Off-to-On<br>On-to-Off                          | 0 $\mu$ s (Default), 5 $\mu$ s, 10 $\mu$ s, 20 $\mu$ s, 50 $\mu$ s, 100 $\mu$ s, 200 $\mu$ s, 500 $\mu$ s, 1 ms, 2 ms, 5 ms, 10 ms, 20 ms, 50 ms |
| Simple counters, counter frequency                                   | 0...f <sub>max</sub> = 50,000 Hz                                                                                                                 |
| Timestamp of inputs (sequence of events)                             | Yes, $\pm$ 10 $\mu$ s accuracy                                                                                                                   |
| Events                                                               | Yes                                                                                                                                              |

**Table 26. Technical Specifications - 5034-UB8F, 5034-UB8FXT - Output**

| Attribute                       | 5034-UB8F, 5034-UB8FXT   |
|---------------------------------|--------------------------|
| On-state voltage range          | 10...30V DC              |
| On-state voltage drop, max      | 0.25V DC                 |
| On-state current per point, min | 1.0 mA                   |
| Off-state voltage, max          | 5V DC with 1 mA min load |

**Table 26. Technical Specifications - 5034-UB8F, 5034-UB8FXT - Output (continued)**

| Attribute                                                             | 5034-UB8F, 5034-UB8FXT                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Off-state leakage current per point, max <sup>(1)</sup>               | 0.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Output current rating per point, max                                  | 0.5 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Output current rating per module, max                                 | 4 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Surge current per point, max                                          | 1.2 A for 10 ms, repeatable every 3 s                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Inductive load allowed, max                                           | 1.2 H                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Output clamping voltage for inductive load when turn off              | (SA voltage + VCL)...0<br>VCL value: Minimum is -63V, Typical is -55V, Maximum is -49V<br>For more information, see the PointMax Digital I/O Modules User Manual, publication <a href="#">5034-UM002</a> .                                                                                                                                                                                                                                                                                |
| Output delay time (backplane to screw), max<br>Off-to-On<br>On-to-Off | 20 µs @ 0.5 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Pulse width, min                                                      | 20 µs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Scheduled outputs                                                     | Supported, accuracy ±10 µs                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| PWM/PTO support                                                       | Yes<br>Maximum switching frequency: 100 kHz (10 µs period)<br>Minimum switching frequency: 0.033 Hz (30 s period)<br>Minimum pulse width: 5 µs<br>Maximum load current (resistive type) per point: <ul style="list-style-type: none"> <li>200 mA for <math>F_{SW} \leq 10</math> kHz</li> <li>100 mA for <math>10 \text{ kHz} &lt; F_{SW} \leq 25</math> kHz</li> <li>40 mA for <math>25 \text{ kHz} &lt; F_{SW} \leq 100</math> kHz</li> </ul> Where $F_{SW}$ is the switching frequency |
| Open load detection diagnostics                                       | Not supported                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Output short circuit/overload detection                               | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Output short circuit/overload protection                              | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Pilot duty rating                                                     | 1.2 A inrush current, 0.5 A rated current, DC-14                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Output states in program mode per point                               | Hold Last State<br>On<br>Off (Default)<br>Local Control                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**Table 26. Technical Specifications - 5034-UB8F, 5034-UB8FXT - Output (continued)**

| Attribute                                     | 5034-UB8F, 5034-UB8FXT                                  |
|-----------------------------------------------|---------------------------------------------------------|
| Output states in fault mode per point         | Hold Last State<br>On<br>Off (Default)<br>Local Control |
| Duration of fault mode per point              | 1 s<br>2 s<br>5 s<br>10 s<br>Forever (Default)          |
| Output final state after fault mode per point | On<br>Off (Default)                                     |

(1) Recommended Loading Resistor - To limit the effects of leakage current through solid-state outputs, you can connect a loading resistor in parallel with your load. For 24V DC operation, use a 5.6 kΩ, 0.5 W resistor for transistor operation.

**Table 27. General Specifications - 5034-UB8F, 5034-UB8FXT**

| Attribute                               | 5034-UB8F, 5034-UB8FXT                                                                                            |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Number of inputs/outputs                | 8 channels, configurable, sinking input, sourcing output                                                          |
| SA power voltage, nom                   | 24V DC                                                                                                            |
| SA power voltage range                  | 10...30V DC                                                                                                       |
| SA power current, nom                   | 4.1 A                                                                                                             |
| SA power current, max                   | 4.2 A                                                                                                             |
| SA power current at no load             | 14.3 mA                                                                                                           |
| SA reverse polarity protection          | Yes                                                                                                               |
| SSV voltage range                       | Follow SA supply                                                                                                  |
| SSV current, max                        | 0.8 A                                                                                                             |
| SSV short-circuit detection             | Yes                                                                                                               |
| Power dissipation, max <sup>(1)</sup>   | 1.43 W                                                                                                            |
| Thermal dissipation, max <sup>(1)</sup> | 4.87 BTU/hr                                                                                                       |
| Isolation voltage                       | 250V (continuous), Basic Insulation Type, System to Field<br>No isolation between SA power and input/output ports |

**Table 27. General Specifications - 5034-UB8F, 5034-UB8FXT (continued)**

| Attribute                      | 5034-UB8F, 5034-UB8FXT                                                                                                                                   |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                | No isolation between individual input/output ports                                                                                                       |
| RIUP support                   | Yes                                                                                                                                                      |
| CIP Sync                       | Slave only ordinary clock                                                                                                                                |
| Electronic keying              | Electronic keying via programming software                                                                                                               |
| RTB key positions (slot)       | 1, 5, 8                                                                                                                                                  |
| RTB supported                  | 5034-RTB18, 5034-RTB18S, 5034-RTB24S                                                                                                                     |
| Wiring category <sup>(2)</sup> | 2 - Signal ports<br>2 - Power ports                                                                                                                      |
| Wiring specification           | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Indicators                     | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>8 yellow/red I/O status indicators                                       |
| Dimensions (HxWxD), approx     | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                          |
| Weight, approx                 | 45.0 g (1.59 oz.) - 5034-UB8F<br>47.0 g (1.66 oz.) - 5034-UB8FXT                                                                                         |
| Enclosure type                 | None (Open-style)                                                                                                                                        |
| North American temp code       | T4                                                                                                                                                       |
| UKEX/ATEX temp code            | T4                                                                                                                                                       |
| IECEx temp code                | T4                                                                                                                                                       |

(1) Value is measured at 60 °C (140 °F). Power dissipation varies with temperature.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## Environmental Specifications and Certifications

The following tables provide the environmental specifications and certifications for the PointMax digital I/O modules.

**Table 28. Environmental Specifications - PointMax Digital I/O Modules**

| Attribute                                                                                                                                                                                                                                                                             | 5034-IB16, 5034-IB8, 5034-OB16, 5034-OB8, 5034-OB4, 5034-OW4I, 5034-UB8, 5034-UB8F                                                                                                                                                                                                               | 5034-IB16XT, 5034-IB8XT, 5034-OB16XT, 5034-OB8XT, 5034-OB4XT, 5034-OW4IXT, 5034-UB8XT, 5034-UB8FXT                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature, operating                                                                                                                                                                                                                                                                | IEC 60068-2-1 (Test Ae, Operating Cold),<br>IEC 60068-2-2 (Test Be, Operating Dry Heat),<br>IEC 60068-2-14 (Test Nb, Operating Thermal Shock):<br>-25 °C ≤ Ta ≤ +60 °C (-13 °F ≤ Ta ≤ +140 °F) for horizontal orientation<br>-25 °C ≤ Ta ≤ +55 °C (-13 °F ≤ Ta ≤ +131 °F) for other orientations |                                                                                                                                                                           |
| Temperature, surrounding air, max                                                                                                                                                                                                                                                     | 60 °C (140 °F)                                                                                                                                                                                                                                                                                   |                                                                                                                                                                           |
| Temperature, nonoperating                                                                                                                                                                                                                                                             | IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold),<br>IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat),<br>IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock):<br>-40...+85 °C (-40...+185 °F)                                                                         |                                                                                                                                                                           |
| Relative humidity                                                                                                                                                                                                                                                                     | IEC 60068-2-30 (Test Db, Unpackaged Damp Heat):<br>5...95% noncondensing                                                                                                                                                                                                                         |                                                                                                                                                                           |
| Conformal coated                                                                                                                                                                                                                                                                      | No                                                                                                                                                                                                                                                                                               | Yes                                                                                                                                                                       |
| Corrosive Atmosphere<br>ASTM B845-97 Method K<br>Accelerated Test (20-Day<br>Exposure)                                                                                                                                                                                                | Severity Level G3 <sup>(1)</sup> per ANSI/ISA 71.04-2013, Airborne<br>Contaminants—Gases                                                                                                                                                                                                         | —                                                                                                                                                                         |
| Corrosive Atmosphere<br>• ASTM B845-97 Method K<br>Accelerated Test (30-Day<br>Exposure)<br><br>• Plus additional Rockwell<br>Automation proprietary<br>accelerated corrosive<br>environment test protocol<br>for specific industries with<br>sources of gaseous sulfur<br>compounds. | —                                                                                                                                                                                                                                                                                                | Severity Level GX <sup>(2)</sup> per ANSI/ISA 71.04-2013, Airborne<br>Contaminants—Gases<br><br>Severity Level CX per IEC 60721-3-3:2019, Chemically Active<br>Substances |
| Vibration                                                                                                                                                                                                                                                                             | IEC 60068-2-6 (Test Fc, Operating):<br><br>5 g @ 10...500 Hz                                                                                                                                                                                                                                     |                                                                                                                                                                           |
| Shock, operating                                                                                                                                                                                                                                                                      | IEC 60068-2-27 (Test Ea, Unpackaged Shock):                                                                                                                                                                                                                                                      |                                                                                                                                                                           |

**Table 28. Environmental Specifications - PointMax Digital I/O Modules (continued)**

| Attribute                   | 5034-IB16, 5034-IB8, 5034-OB16, 5034-OB8, 5034-OB4, 5034-OW4I, 5034-UB8, 5034-UB8F                                                                                                         | 5034-IB16XT, 5034-IB8XT, 5034-OB16XT, 5034-OB8XT, 5034-OB4XT, 5034-OW4IXT, 5034-UB8XT, 5034-UB8FXT |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
|                             | 30 g                                                                                                                                                                                       |                                                                                                    |
| Repetitive shock, operating | IEC 60068-2-27:<br>25 g, 6 ms duration, 1000 shocks in each $\pm$ direction in each 3 axis                                                                                                 |                                                                                                    |
| Shock, nonoperating         | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br>50 g                                                                                                                                        |                                                                                                    |
| Emissions                   | IEC 61000-6-4                                                                                                                                                                              |                                                                                                    |
| ESD immunity                | IEC 61000-4-2:<br>6 kV contact discharges<br>8 kV air discharges                                                                                                                           |                                                                                                    |
| Radiated RF immunity        | IEC 61000-4-3:<br>10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz<br>10V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz<br>10V/m with 1 kHz sine wave 80% AM from 2700...6000 MHz |                                                                                                    |
| EFT/B immunity              | IEC 61000-4-4:<br>$\pm 3$ kV @ 5 kHz on signal ports                                                                                                                                       |                                                                                                    |
| Surge transient immunity    | IEC 61000-4-5:<br>$\pm 1$ kV line-line (DM) and $\pm 2$ kV line-earth (CM) on signal ports                                                                                                 |                                                                                                    |
| Conducted RF immunity       | IEC 61000-4-6:<br>10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz                                                                                                                |                                                                                                    |

(1) Up to 86.4 g/(m<sup>2</sup>.yr), mass loss of copper due to corrosion.

(1) Up to 2100 angstroms of film growth per 30 days of copper and/or silver reactivity.

**Table 29. Certifications - PointMax Digital I/O Modules**

| Certification <sup>(1)</sup> | 5034-IB16, 5034-IB16XT, 5034-IB8, 5034-IB8XT, 5034-OB16, 5034-OB16XT, 5034-OB8, 5034-OB8XT, 5034-OB4, 5034-OB4XT, 5034-OW4I, 5034-OW4IXT, 5034-UB8, 5034-UB8XT, 5034-UB8F, 5034-UB8FXT                                                               |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| c-UL-us                      | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657.<br><br>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.                            |
| UK and CE                    | UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with:<br><br>EN 61326-1; Meas./Control/Lab., Industrial Requirements<br><br>EN 61000-6-2; Industrial Immunity<br><br>EN 61000-6-4; Industrial Emissions |

**Table 29. Certifications - PointMax Digital I/O Modules (continued)**

| Certification <sup>(1)</sup> | 5034-IB16, 5034-IB16XT, 5034-IB8, 5034-IB8XT, 5034-OB16, 5034-OB16XT, 5034-OB8, 5034-OB8XT, 5034-OB4, 5034-OB4XT, 5034-OW4I, 5034-OW4IXT, 5034-UB8, 5034-UB8XT, 5034-UB8F, 5034-UB8FXT                                                                                                                                                                                                                                                                                 |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                              | <p>EN 61131-2; Programmable Controllers (Clause 8, Zone A &amp; B)</p> <p>UK Statutory Instrument 2016 No. 1101 and European Union 2014/35/EU LVD, compliant with:</p> <p>EN 61010-2-201; Control Equipment Safety Requirements</p> <p>UK Statutory Instrument 2012 No. 3032 and European Union 2011/65/EU RoHS, compliant with:</p> <p>EN IEC 63000; Technical documentation</p>                                                                                      |
| RCM                          | <p>Australian Radiocommunications Act, compliant with:</p> <p>EN 61000-6-4; Industrial Emissions</p>                                                                                                                                                                                                                                                                                                                                                                   |
| Ex                           | <p>UK Statutory Instrument 2016 No. 1107 and European Union 2014/34/EU ATEX Directive, compliant with:</p> <p>EN IEC 60079-0; General Requirements</p> <p>EN IEC 60079-15; Potentially Explosive Atmospheres, Protection "n" for 5034-OW4I, 5034-OW4IXT only</p> <p>EN IEC 60079-7; Explosive Atmospheres, Protection "e"</p> <p>II 3 G Ex ec IIC T4 Gc and II 3 G Ex ec nC IIC T4 Gc for 5034-OW4I and 5034-OW4IXT only</p> <p>UL 24 ATEX 3272X and UL24UKEX2997X</p> |
| IECEx                        | <p>IECEx System, compliant with:</p> <p>IEC 60079-0; General Requirements</p> <p>IEC 60079-15; Potentially Explosive Atmospheres, Protection "n" for 5034-OW4I, 5034-OW4IXT only</p> <p>IEC 60079-7; Explosive Atmospheres, Protection "e"</p> <p>II 3 G Ex ec IIC T4 Gc and II 3 G Ex ec nC IIC T4 Gc for 5034-OW4I, 5034-OW4IXT only</p> <p>IECEx UL 24.0066X</p>                                                                                                    |
| KC                           | <p>Korean Registration of Broadcasting and Communications Equipment, compliant with:</p> <p>Article 58-2 of Radio Waves Act, Clause 4</p>                                                                                                                                                                                                                                                                                                                              |
| Morocco                      | <p>Arrêté ministériel n° 6404-15 du 1<sup>er</sup> muharram 1437</p> <p>Arrêté ministériel n° 6404-15 du 29 ramadan 1436</p>                                                                                                                                                                                                                                                                                                                                           |
| CCC                          | <p>CNCA-C23-01 强制性产品认证实施规则 防爆电气</p> <p>CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products</p> <p>2025122309123247</p>                                                                                                                                                                                                                                                                                                                             |

(1) When marked. See the Product Certifications website at [rok.auto/certifications](http://rok.auto/certifications) for declarations of conformity, certificates, and other certification details.

# Safety Digital I/O Modules


| I/O Type              | Catalog Number         | Description             |
|-----------------------|------------------------|-------------------------|
| Safety Digital Input  | 5034-IB8S, 5034-IB8SXT | Safety digital 8 input  |
| Safety Digital Output | 5034-OB8S, 5034-OB8SXT | Safety digital 8 output |

Environmental specifications and certifications for PointMax safety digital I/O modules are provided in [Environmental Specifications and Certifications on page 68](#).

## 5034-IB8S and 5034-IB8SXT Safety Digital 8 Input Modules

For more examples of wiring diagrams for 5034-IB8S and 5034-IB8SXT that can be used in functional safety applications, see the PointMax Digital I/O Modules User Manual, publication [5034-UM002](#). The wiring configuration affects the safety application level to which a PointMax safety I/O module is suitable.

Figure 28. 5034-IB8S and 5034-IB8SXT Wiring Diagram - 2-wire and 3-wire Sensor Wiring

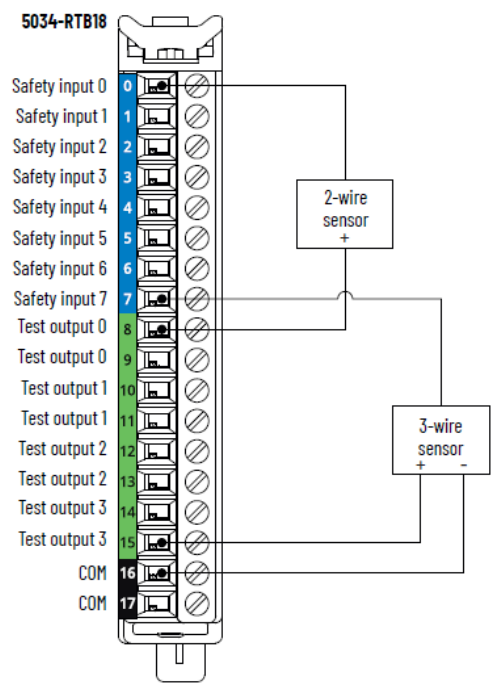

All test outputs support muting lamp outputs.

Figure 29. 5034-IB8S and 5034-IB8SXT Functional Block Diagram

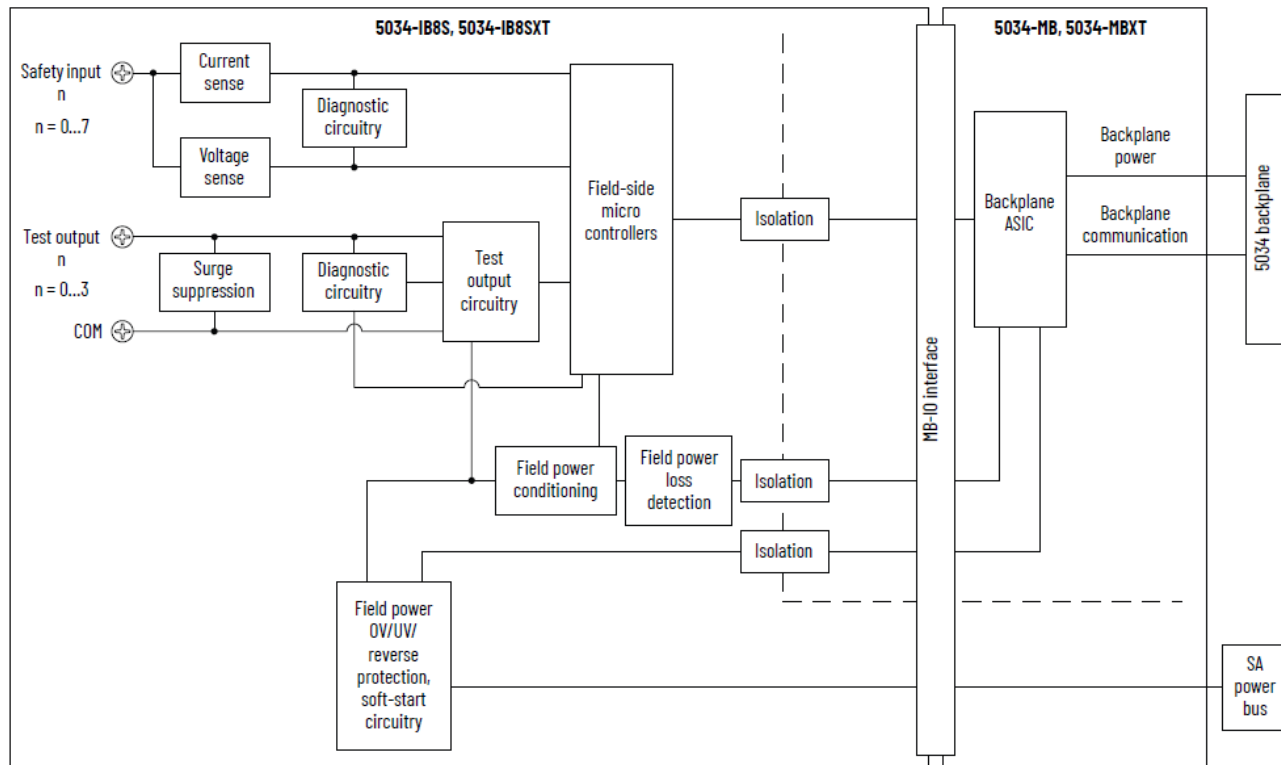


Table 30. Technical Specifications - 5034-IB8S, 5034-IB8SXT

| Attribute                              | 5034-IB8S, 5034-IB8SXT                                                            |
|----------------------------------------|-----------------------------------------------------------------------------------|
| On-state voltage range                 | 10...30V DC                                                                       |
| On-state current, min                  | 2.2 mA @ 10V DC                                                                   |
| On-state current, nom                  | 2.4 mA @ 24V DC                                                                   |
| On-state current, max                  | 2.5 mA @ 30V DC                                                                   |
| Off-state voltage, max                 | 5V DC                                                                             |
| Off-state current, max                 | 1.5 mA                                                                            |
| Input delay time                       | 0 ms (Default), 2 ms, 5 ms, 10 ms, 20 ms, 50 ms                                   |
| Off-to-On, user-selectable filter time |                                                                                   |
| Input delay time                       | 0 ms (Default), 2 ms, 5 ms, 10 ms, 20 ms, 50 ms                                   |
| On-to-Off, user-selectable filter time |                                                                                   |
| Safety class <sup>(1)</sup>            | Up to and including Cat. 4 / PL e acc. to EN ISO 13849-1, SIL 3 acc. to IEC 61508 |
| SRT                                    | 7 ms @ RPI of 2 ms                                                                |
| Test output current per point, max     | 0.7 A                                                                             |

**Table 30. Technical Specifications - 5034-IB8S, 5034-IB8SXT (continued)**

| Attribute                                       | 5034-IB8S, 5034-IB8SXT                                                                |
|-------------------------------------------------|---------------------------------------------------------------------------------------|
| Test output current per module, total           | 2.8 A                                                                                 |
| Test output pulse width, max                    | 0.7 ms                                                                                |
| Test output pulse period, typical               | 512 ms                                                                                |
| Test output field capacitance, max              | 100 nF                                                                                |
| Surge current per test output, max              | 2.4 A for 50 ms, repeatable every 2 s<br>The module current rating cannot exceed 5 A. |
| Test output on-state voltage drop, max          | 0.5V DC @ 0.7 A                                                                       |
| Test output off-state leakage current, max      | 0.5 mA                                                                                |
| Test output off-state voltage, max              | 5V DC                                                                                 |
| Muting lamp fault threshold current, max        | 6 mA                                                                                  |
| Muting lamp fault threshold current, min        | 1.8 mA                                                                                |
| Test output short to ground/overload protection | Yes (per point), 4 A typical                                                          |
| Module over-temperature detection               | Yes                                                                                   |
| SA supply reverse voltage protection            | Yes                                                                                   |
| SA supply overvoltage protection, max           | 60V DC                                                                                |

(1) See the PointMax Digital I/O Modules User Manual, publication [5034-UM002](#), for Safety Application Suitability Levels and Safety Data for safety modules.

**Table 31. General Specifications - 5034-IB8S, 5034-IB8SXT**

| Attribute                                  | 5034-IB8S, 5034-IB8SXT                |
|--------------------------------------------|---------------------------------------|
| Number of safety inputs                    | 8                                     |
| Input type                                 | IEC 61131-2 (Type 3), current sinking |
| Number of Test outputs/Muting Lamp outputs | 4                                     |
| Test output type                           | Sourcing                              |
| SA power nominal operating supply voltage  | 24V DC                                |
| SA power operating voltage range           | 18...30V DC                           |
| SA power current, nom                      | 2.9 A                                 |
| SA power current, max                      | 2.9 A                                 |

**Table 31. General Specifications - 5034-IB8S, 5034-IB8SXT (continued)**

| Attribute                      | 5034-IB8S, 5034-IB8SXT                                                                                                                                   |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| SA power current at no load    | 19 mA @ 24V DC                                                                                                                                           |
| Power dissipation, max         | 1.55 W                                                                                                                                                   |
| Thermal dissipation, max       | 5.29 BTU/hr                                                                                                                                              |
| Isolation voltage              | 250V (continuous), Basic Insulation Type, System to Field<br>No isolation between SA power and input ports<br>No isolation between individual inputs     |
| RIUP support                   | Yes                                                                                                                                                      |
| CIP Sync                       | Yes, slave only ordinary clock                                                                                                                           |
| Electronic keying              | Electronic keying via programming software                                                                                                               |
| RTB key positions              | 1, 4, 14                                                                                                                                                 |
| RTB supported                  | 5034-RTB18, 5034-RTB18S                                                                                                                                  |
| Wiring category <sup>(2)</sup> | 2 - Signal ports<br>2 - Power ports                                                                                                                      |
| Wiring specification           | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Indicators                     | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>8 yellow/red I/O status indicators                                       |
| Dimensions (HxWxD), approx     | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                          |
| Weight, approx                 | 46.0 g (1.62 oz.) - 5034-IB8S<br>49.0 g (1.73 oz.) - 5034-IB8SXT                                                                                         |
| Enclosure type                 | None (Open-style)                                                                                                                                        |
| North American temp code       | T4                                                                                                                                                       |
| UKEX/ATEX temp code            | T4                                                                                                                                                       |
| IECEx temp code                | T4                                                                                                                                                       |

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

# 5034-OB8S and 5034-OB8SXT Safety Digital 8 Output Modules

For more examples of wiring diagrams for 5034-OB8S and 5034-OB8SXT that can be used in functional safety applications, see the PointMax Digital I/O Modules User Manual, publication [5034-UM002](#). The wiring configuration affects the safety application level to which a PointMax safety I/O module is suitable.

Figure 30. 5034-OB8S and 5034-OB8SXT Wiring Diagram


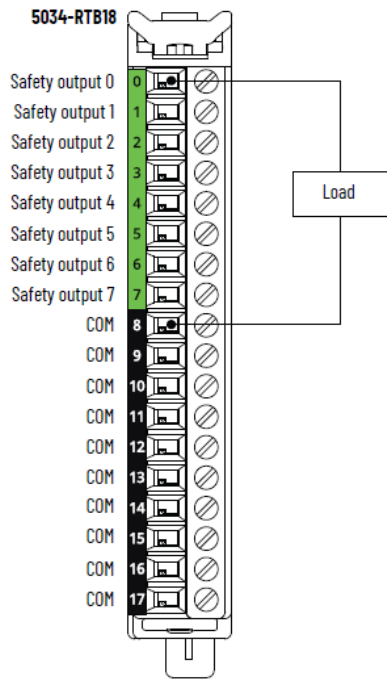


Figure 31. 5034-OB8S and 5034-OB8SXT Functional Block Diagram

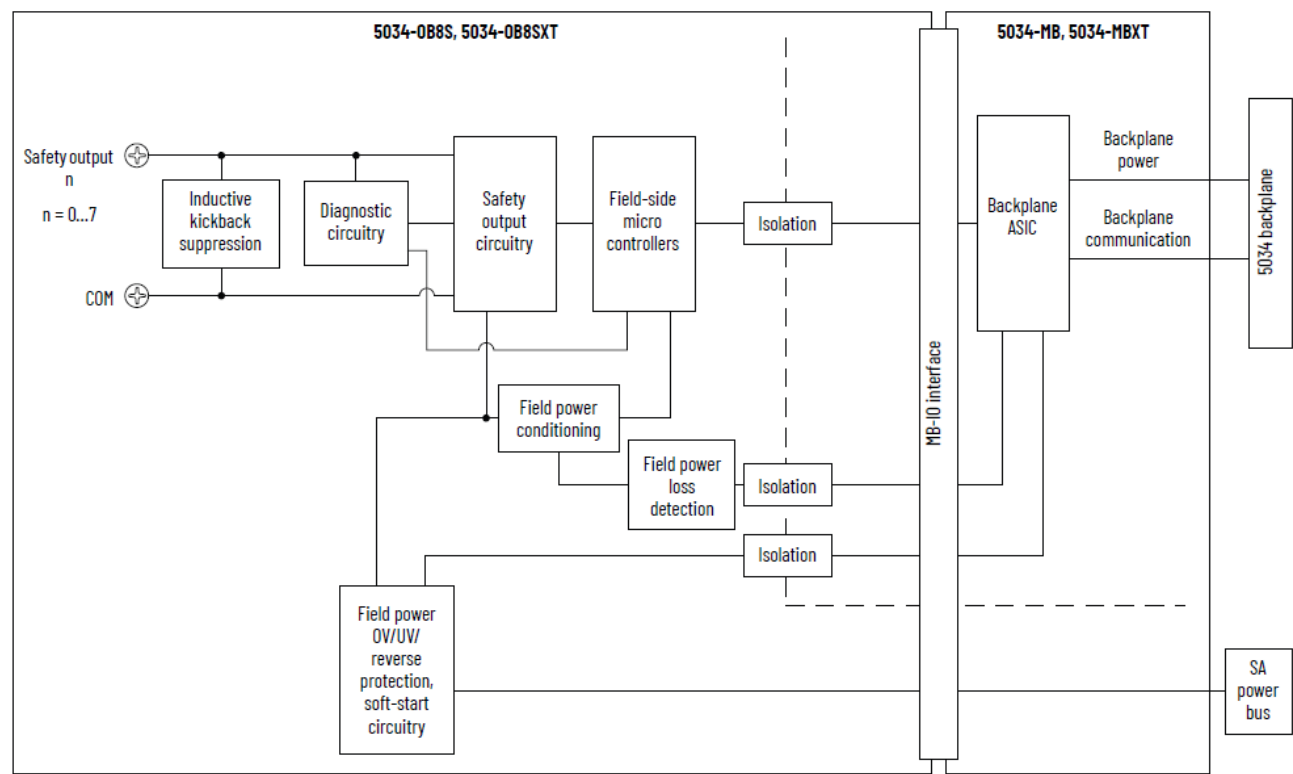

**Table 32. Technical Specifications - 5034-0B8S, 5034-0B8SXT**

| Attribute                                                       | 5034-0B8S, 5034-0B8SXT                                                                 |
|-----------------------------------------------------------------|----------------------------------------------------------------------------------------|
| On-state voltage range                                          | 17.5...30V DC                                                                          |
| On-state voltage drop, max                                      | 0.5V DC @ 1 A                                                                          |
| Off-state voltage, max                                          | 5V DC with min 10 kΩ load                                                              |
| Off-state leakage current per point, max                        | 0.5 mA                                                                                 |
| Output current rating per point, max                            | 1 A @ 40 °C (104 °F)<br>0.5 A @ 60 °C (140 °F)                                         |
| Output current rating per module, total                         | 8 A @ 40 °C (104 °F)<br>4 A @ 60 °C (140 °F)                                           |
| Field capacitance limit permitted per output, max               | 100 nF                                                                                 |
| Field inductance limit permitted per output, max                | 1.2 H @ 0.5 A                                                                          |
| Output clamping voltage for inductive load when turned off, max | 53V DC                                                                                 |
| Surge current per point, max                                    | 2.4 A for 50 ms, repeatable every 2 s<br>The module current rating cannot exceed 10 A. |
| Safety class <sup>(1)</sup>                                     | Up to and including Cat. 4 / PL e acc. to EN ISO 13849-1, SIL 3 acc. to IEC 61508      |
| SRT                                                             | 6 ms                                                                                   |
| Safety Test Pulse width, max                                    | 0.7 ms                                                                                 |
| Safety Test Pulse period, typical                               | 512 ms                                                                                 |
| Open load detection diagnostics                                 | Off state (can be enabled manually)                                                    |
| Output overload detection                                       | Yes, 4 A typical                                                                       |
| Output short to high detection                                  | Yes in Safety Pulse Test mode                                                          |
| Channel-to-channel short-circuit detection                      | Yes in Safety Pulse Test mode                                                          |
| Module over-temperature detection                               | Yes                                                                                    |
| Output short to ground/overload protection                      | Yes                                                                                    |
| SA supply reverse voltage protection                            | Yes                                                                                    |
| SA supply overvoltage protection, max                           | 60V DC                                                                                 |

(1) See the PointMax Digital I/O Modules User Manual, publication [5034-UM002](#), for Safety Application Suitability Levels and Safety Data for safety modules.

**Table 33. General Specifications - 5034-OB8S, 5034-OB8SXT**

| Attribute                                 | 5034-OB8S, 5034-OB8SXT                                                                                                                                      |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Outputs per module                        | 8                                                                                                                                                           |
| Output type                               | Sourcing                                                                                                                                                    |
| SA power nominal operating supply voltage | 24V DC                                                                                                                                                      |
| SA power operating voltage range          | 18...30V DC                                                                                                                                                 |
| SA power current, nom                     | 8.1 A @ 40 °C (104 °F)<br>4.1 A @ 60 °C (140 °F)                                                                                                            |
| SA power current, max                     | 8.1 A @ 40 °C (104 °F)<br>4.1 A @ 60 °C (140 °F)                                                                                                            |
| SA power current at no load               | 20 mA @ 24V DC                                                                                                                                              |
| Power dissipation, max                    | 2.6 W @ 40 °C (104 °F)<br>1.4 W @ 60 °C (140 °F)                                                                                                            |
| Thermal dissipation, max                  | 8.87 BTU/hr @ 40 °C (104 °F)<br>4.78 BTU/hr @ 60 °C (140 °F)                                                                                                |
| Isolation voltage                         | 250V (continuous), Basic Insulation Type, System to Field<br>No isolation between SA power and output ports<br>No isolation between individual output ports |
| RIUP support                              | Yes                                                                                                                                                         |
| CIP Sync                                  | Yes, slave only ordinary clock                                                                                                                              |
| Electronic keying                         | Electronic keying via programming software                                                                                                                  |
| RTB key positions (slot)                  | 1, 5, 14                                                                                                                                                    |
| RTB supported                             | 5034-RTB18, 5034-RTB18S                                                                                                                                     |
| Wiring category <sup>(1)</sup>            | 2 - Signal ports<br>2 - Power ports                                                                                                                         |
| Wiring specification                      | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a>    |
| Indicators                                | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>8 yellow/red I/O status indicators                                          |
| Dimensions (HxWxD), approx                | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                             |

**Table 33. General Specifications - 5034-0B8S, 5034-0B8SXT (continued)**

| Attribute                | 5034-0B8S, 5034-0B8SXT                                           |
|--------------------------|------------------------------------------------------------------|
| Weight, approx           | 46.0 g (1.62 oz.) - 5034-0B8S<br>49.0 g (1.73 oz.) - 5034-0B8SXT |
| Enclosure type           | None (Open-style)                                                |
| North American temp code | T4                                                               |
| UKEX/ATEX temp code      | T4                                                               |
| IECEx temp code          | T4                                                               |

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## Environmental Specifications and Certifications

The following tables provide the environmental specifications and certifications for the PointMax safety digital I/O modules.

**Table 34. Environmental Specifications - PointMax Safety Digital I/O Modules**

| Attribute                                                                              | 5034-1B8S, 5034-0B8S                                                                                                                                                                                                                                                                             | 5034-1B8SXT, 5034-0B8SXT |
|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| Temperature, operating                                                                 | IEC 60068-2-1 (Test Ae, Operating Cold),<br>IEC 60068-2-2 (Test Be, Operating Dry Heat),<br>IEC 60068-2-14 (Test Nb, Operating Thermal Shock):<br>-25 °C ≤ Ta ≤ +60 °C (-13 °F ≤ Ta ≤ +140 °F) for horizontal orientation<br>-25 °C ≤ Ta ≤ +55 °C (-13 °F ≤ Ta ≤ +131 °F) for other orientations |                          |
| Temperature, surrounding air, max                                                      | 60 °C (140 °F)                                                                                                                                                                                                                                                                                   |                          |
| Temperature, nonoperating                                                              | IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold),<br>IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat),<br>IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock):<br>-40...+85 °C (-40...+185 °F)                                                                         |                          |
| Relative humidity                                                                      | IEC 60068-2-30 (Test Db, Unpackaged Damp Heat):<br>5...95% noncondensing                                                                                                                                                                                                                         |                          |
| Conformal coated                                                                       | No                                                                                                                                                                                                                                                                                               | Yes                      |
| Corrosive Atmosphere<br>ASTM B845-97 Method K<br>Accelerated Test (20-Day<br>Exposure) | Severity Level G3 <sup>(1)</sup> per ANSI/ISA 71.04-2013, Airborne<br>Contaminants—Gases                                                                                                                                                                                                         | —                        |

**Table 34. Environmental Specifications - PointMax Safety Digital I/O Modules (continued)**

| Attribute                                                                                                                                                                                                                                                                                                  | 5034-IB8S, 5034-OB8S                                                                                                                                                                                   | 5034-IB8SXT, 5034-OB8SXT                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Corrosive Atmosphere <ul style="list-style-type: none"> <li>ASTM B845-97 Method K Accelerated Test (30-Day Exposure)</li> <li>Plus additional Rockwell Automation proprietary accelerated corrosive environment test protocol for specific industries with sources of gaseous sulfur compounds.</li> </ul> | —                                                                                                                                                                                                      | Severity Level GX <sup>(2)</sup> per ANSI/ISA 71.04-2013, Airborne Contaminants—Gases<br><br>Severity Level CX per IEC 60721-3-3:2019, Chemically Active Substances |
| Vibration                                                                                                                                                                                                                                                                                                  | IEC 60068-2-6 (Test Fc, Operating):<br><br>5 g @ 10...500 Hz                                                                                                                                           |                                                                                                                                                                     |
| Shock, operating                                                                                                                                                                                                                                                                                           | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br><br>30 g                                                                                                                                                |                                                                                                                                                                     |
| Repetitive shock, operating                                                                                                                                                                                                                                                                                | IEC 60068-2-27:<br><br>25 g, 6 ms duration, 1000 shocks in each ± direction in each 3 axis                                                                                                             |                                                                                                                                                                     |
| Shock, nonoperating                                                                                                                                                                                                                                                                                        | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br><br>50 g                                                                                                                                                |                                                                                                                                                                     |
| Emissions                                                                                                                                                                                                                                                                                                  | IEC 61000-6-4                                                                                                                                                                                          |                                                                                                                                                                     |
| ESD immunity                                                                                                                                                                                                                                                                                               | IEC 61000-4-2:<br><br>6 kV contact discharges<br><br>8 kV air discharges                                                                                                                               |                                                                                                                                                                     |
| Radiated RF immunity                                                                                                                                                                                                                                                                                       | IEC 61000-4-3:<br><br>10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz<br><br>10V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz<br><br>10V/m with 1 kHz sine wave 80% AM from 2700...6000 MHz |                                                                                                                                                                     |
| EFT/B immunity                                                                                                                                                                                                                                                                                             | IEC 61000-4-4:<br><br>±3 kV @ 5 kHz on signal ports                                                                                                                                                    |                                                                                                                                                                     |
| Surge transient immunity                                                                                                                                                                                                                                                                                   | IEC 61000-4-5:<br><br>±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports                                                                                                                   |                                                                                                                                                                     |
| Conducted RF immunity                                                                                                                                                                                                                                                                                      | IEC 61000-4-6:<br><br>10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz                                                                                                                        |                                                                                                                                                                     |

(1) Up to 86.4 g/(m<sup>2</sup>.yr), mass loss of copper due to corrosion.

**Table 34. Environmental Specifications - PointMax Safety Digital I/O Modules (continued)**

| Attribute | 5034-IB8S, 5034-OB8S | 5034-IB8SXT, 5034-OB8SXT |
|-----------|----------------------|--------------------------|
|-----------|----------------------|--------------------------|

(2) Up to 2100 angstroms of film growth per 30 days of copper and/or silver reactivity.

**Table 35. Certifications - PointMax Safety Digital I/O Modules**

| Certification <sup>(1)</sup> | 5034-IB8S, 5034-IB8SXT, 5034-OB8S, 5034-OB8SXT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| c-UL-us                      | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657.<br><br>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.                                                                                                                                                                                                                                                                                                                                                                          |
| UK and CE                    | UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with:<br>EN 61326-1; Meas./Control/Lab., Industrial Requirements<br>EN 61000-6-2; Industrial Immunity<br>EN 61000-6-4; Industrial Emissions<br>EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)<br>UK Statutory Instrument 2016 No. 1101 and European Union 2014/35/EU LVD, compliant with:<br>EN 61010-2-201; Control Equipment Safety Requirements<br>UK Statutory Instrument 2012 No. 3032 and European Union 2011/65/EU RoHS, compliant with:<br>EN IEC 63000; Technical documentation |
| RCM                          | Australian Radiocommunications Act, compliant with:<br>EN 61000-6-4; Industrial Emissions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Ex                           | UK Statutory Instrument 2016 No. 1107 and European Union 2014/34/EU ATEX Directive, compliant with:<br>EN IEC 60079-0; General Requirements<br>EN IEC 60079-7; Explosive Atmospheres, Protection "e"<br>II 3 G Ex ec IIC T4 Gc<br>UL 24 ATEX 3272X and UL24UKEX2997X                                                                                                                                                                                                                                                                                                                               |
| IECEx                        | IECEx System, compliant with:<br>IEC 60079-0; General Requirements<br>IEC 60079-7; Explosive Atmospheres, Protection "e"<br>II 3 G Ex ec IIC T4 Gc<br>IECEx UL 24.0066X                                                                                                                                                                                                                                                                                                                                                                                                                            |
| TÜV <sup>(2)</sup>           | TÜV Certified for Functional Safety:<br>Up to and including Cat. 4 / PLe according to EN ISO 13849-1 and SIL 3 according to IEC 61508                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| KC                           | Korean Registration of Broadcasting and Communications Equipment, compliant with:<br>Article 58-2 of Radio Waves Act, Clause 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Morocco                      | Arrêté ministériel n° 6404-15 du 1 er muharram 1437                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

Table 35. Certifications - PointMax Safety Digital I/O Modules (continued)

|                              |                                                                                                                             |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Certification <sup>(1)</sup> | 5034-IB8S, 5034-IB8SXT, 5034-OB8S, 5034-OB8SXT                                                                              |
|                              | Arrêté ministériel n° 6404-15 du 29 ramadan 1436                                                                            |
| CCC                          | CNCA-C23-01 强制性产品认证实施规则 防爆电气<br>CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products<br>2025122309123247 |

(1) When marked. See the Product Certifications website at [rok.auto/certifications](http://rok.auto/certifications) for declarations of conformity, certificates, and other certification details.

(2) When used as described in the GuardLogix® 5580 and Compact GuardLogix 5380 Controller Systems Reference Manual, publication [1756-RM012](#) and the PointMax Digital I/O Modules User Manual, publication [5034-UM002](#), for Safety Application Suitability Levels and Safety Data for safety modules.

# Analog I/O Modules

| I/O Type      | Catalog Number           | Description                    |
|---------------|--------------------------|--------------------------------|
| Analog Input  | 5034-IF8C, 5034-IF8CXT   | Analog 8 input current         |
|               | 5034-IF8V, 5034-IF8VXT   | Analog 8 input voltage         |
|               | 5034-IF4, 5034-IF4XT     | Analog 4 input                 |
|               | 5034-IF4IH, 5034-IF4IHXT | Analog 4 input isolated HART   |
|               | 5034-IRT4I, 5034-IRT4IXT | Analog 4 input isolated RTD/TC |
| Analog Output | 5034-OF4, 5034-OF4XT     | Analog 4 output                |
|               | 5034-OF4IH, 5034-OF4IHXT | Analog 4 output isolated HART  |

Environmental specifications and certifications for PointMax analog I/O modules are provided in [Environmental Specifications and Certifications on page 105](#).

# 5034-IF8C and 5034-IF8CXT Analog 8 Input Current Modules

Figure 32. 5034-IF8C and 5034-IF8CXT Wiring Diagram

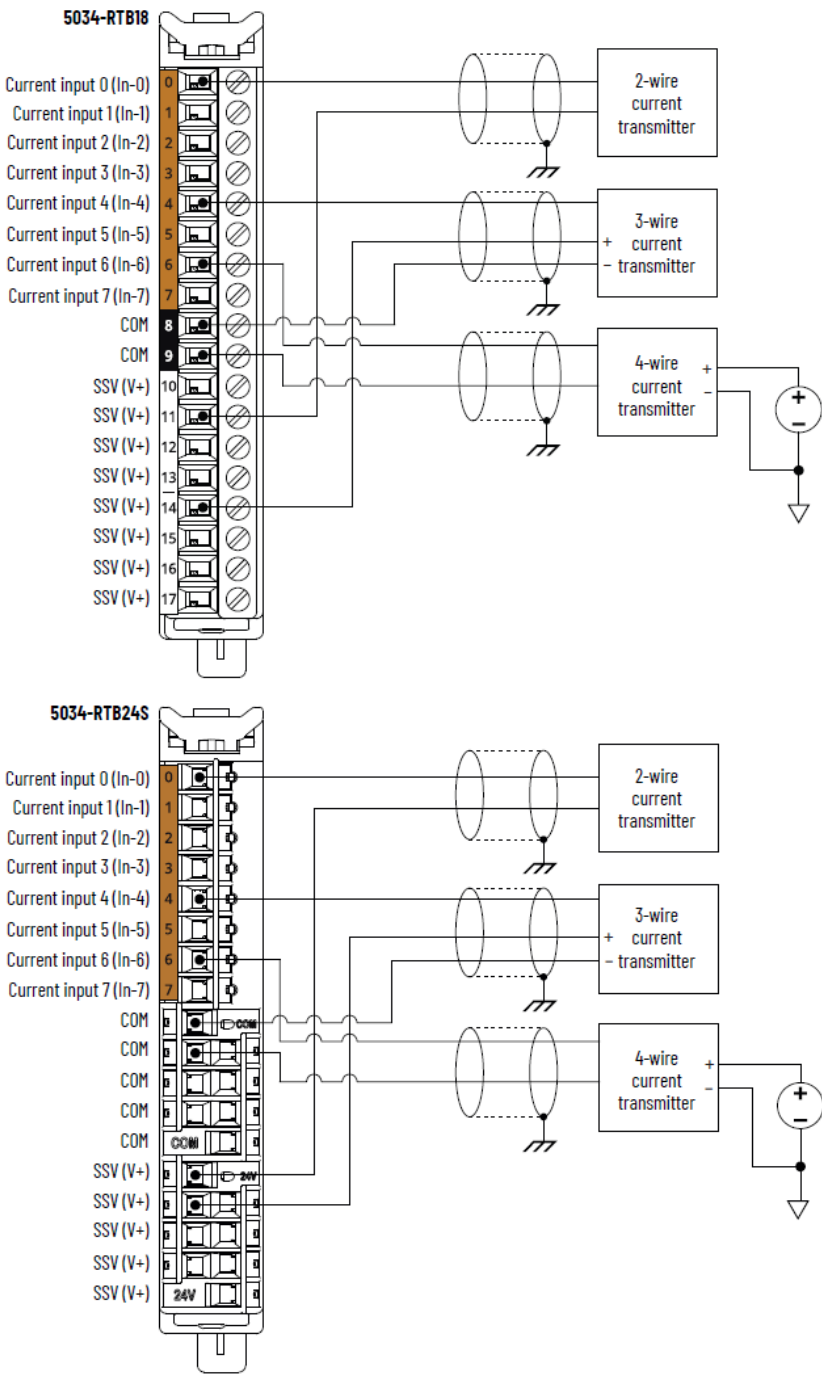


Figure 33. 5034-IF8C and 5034-IF8CXT Functional Block Diagram

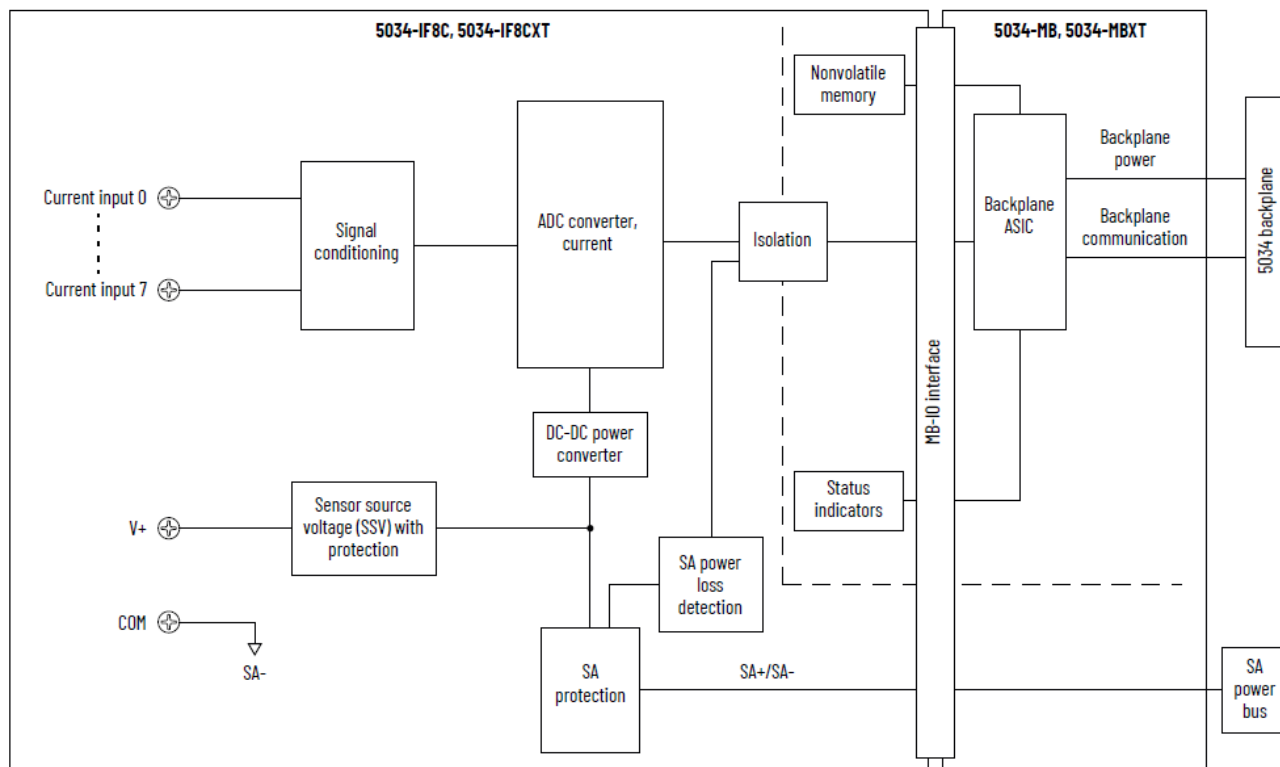


Table 36. Technical Specifications - 5034-IF8C, 5034-IF8CXT

| Attribute                                                                       | 5034-IF8C, 5034-IF8CXT                                                        |
|---------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Input range, current                                                            | 0...20 mA<br>4...20 mA                                                        |
| Input impedance                                                                 | Current: 75...115 $\Omega$                                                    |
| Module conversion method                                                        | Sigma-delta                                                                   |
| Resolution, current <sup>(1)</sup><br>At 50/60 Hz notch filter                  | 16 bits                                                                       |
| Calibrated accuracy at 25 °C (77 °F)                                            | Current: 0.1% full scale with 50/60 Hz filter                                 |
| Calibrated accuracy over full temperature range<br>-25...+60 °C (-13...+140 °F) | Current: 0.2% full scale with 50/60 Hz filter                                 |
| Fastest scan time per channel                                                   | 0.4 ms                                                                        |
| Fastest scan time per module                                                    | 1.2 ms                                                                        |
| Input notch filter (Hz) selections                                              | 10, 20, 50, 60 (Default), 100, 200, 400, 500, 1000, 5000, 10000, 15625, 31250 |
| Input digital filter                                                            | First order lag, 0 ms (Default)<br>0...32,767 ms (32.767 s)                   |

**Table 36. Technical Specifications - 5034-IF8C, 5034-IF8CXT (continued)**

| Attribute                            | 5034-IF8C, 5034-IF8CXT                              |
|--------------------------------------|-----------------------------------------------------|
| HART handheld compliance             | Not supported                                       |
| Input overvoltage protection, max    | ±32V DC                                             |
| Overcurrent protection               | Yes                                                 |
| Data value during overload condition | Full scale, overrange flag, data uncertain/data bad |
| Open wire detection time             | Current: ≤ 1 sec                                    |
| Onboard data alarming                | Yes                                                 |
| Scaling to engineering units         | Yes                                                 |
| Real-time channel sampling           | Yes                                                 |
| Data format                          | IEEE 754<br>32-bit floating point                   |
| Rolling timestamp of inputs          | Yes                                                 |

(1) Notch filter dependent.

**Table 37. General Specifications - 5034-IF8C, 5034-IF8CXT**

| Attribute                             | 5034-IF8C, 5034-IF8CXT                   |
|---------------------------------------|------------------------------------------|
| Number of inputs                      | 8 channels, single-ended<br>Current mode |
| SA power voltage, nom                 | 24V DC                                   |
| SA power voltage range                | 10...30V DC                              |
| SA power current, nom                 | 1.1 A                                    |
| SA power current, max                 | 1.2 A                                    |
| SA power current at no load           | 11 mA                                    |
| SA reverse polarity protection        | Yes                                      |
| SSV voltage range                     | Follow SA supply                         |
| SSV current, max                      | 1.0 A                                    |
| SSV short circuit protection          | Yes                                      |
| Power dissipation, max <sup>(1)</sup> | 0.95 W                                   |

**Table 37. General Specifications - 5034-IF8C, 5034-IF8CXT (continued)**

| Attribute                               | 5034-IF8C, 5034-IF8CXT                                                                                                                                    |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Thermal dissipation, max <sup>(1)</sup> | 3.24 BTU/hr                                                                                                                                               |
| Isolation voltage                       | 250V (continuous), Basic Insulation Type, System to Field<br>No isolation between SA power and input ports<br>No isolation between individual input ports |
| Calibration                             | Factory-calibrated<br>Manual calibration supported, see PointMax Analog I/O Modules User Manual, publication <a href="#">5034-UM003</a>                   |
| RIUP support                            | Yes                                                                                                                                                       |
| CIP Sync                                | Yes, slave only ordinary clock                                                                                                                            |
| Electronic keying                       | Electronic keying via programming software                                                                                                                |
| RTB key positions (slot)                | 2, 5, 8                                                                                                                                                   |
| RTB supported                           | 5034-RTB18, 5034-RTB18S, 5034-RTB24S                                                                                                                      |
| Wiring category <sup>(2)</sup>          | 2 - Signal ports<br>2 - Power ports                                                                                                                       |
| Wiring specification                    | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a>  |
| Indicators                              | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>8 yellow/red I/O status indicators                                        |
| Dimensions (HxWxD), approx              | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                           |
| Weight, approx                          | 43.0 g (1.51 oz.) - 5034-IF8C<br>45.0 g (1.59 oz.) - 5034-IF8CXT                                                                                          |
| Enclosure type                          | None (Open-style)                                                                                                                                         |
| North American temp code                | T4                                                                                                                                                        |
| UKEX/ATEX temp code                     | T4                                                                                                                                                        |
| IECEx temp code                         | T4                                                                                                                                                        |

(1) Value is measured at 60 °C (140 °F). Power dissipation varies with temperature.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

# 5034-IF8V and 5034-IF8VXT Analog 8 Input Voltage Modules

Figure 34. 5034-IF8V and 5034-IF8VXT Wiring Diagram

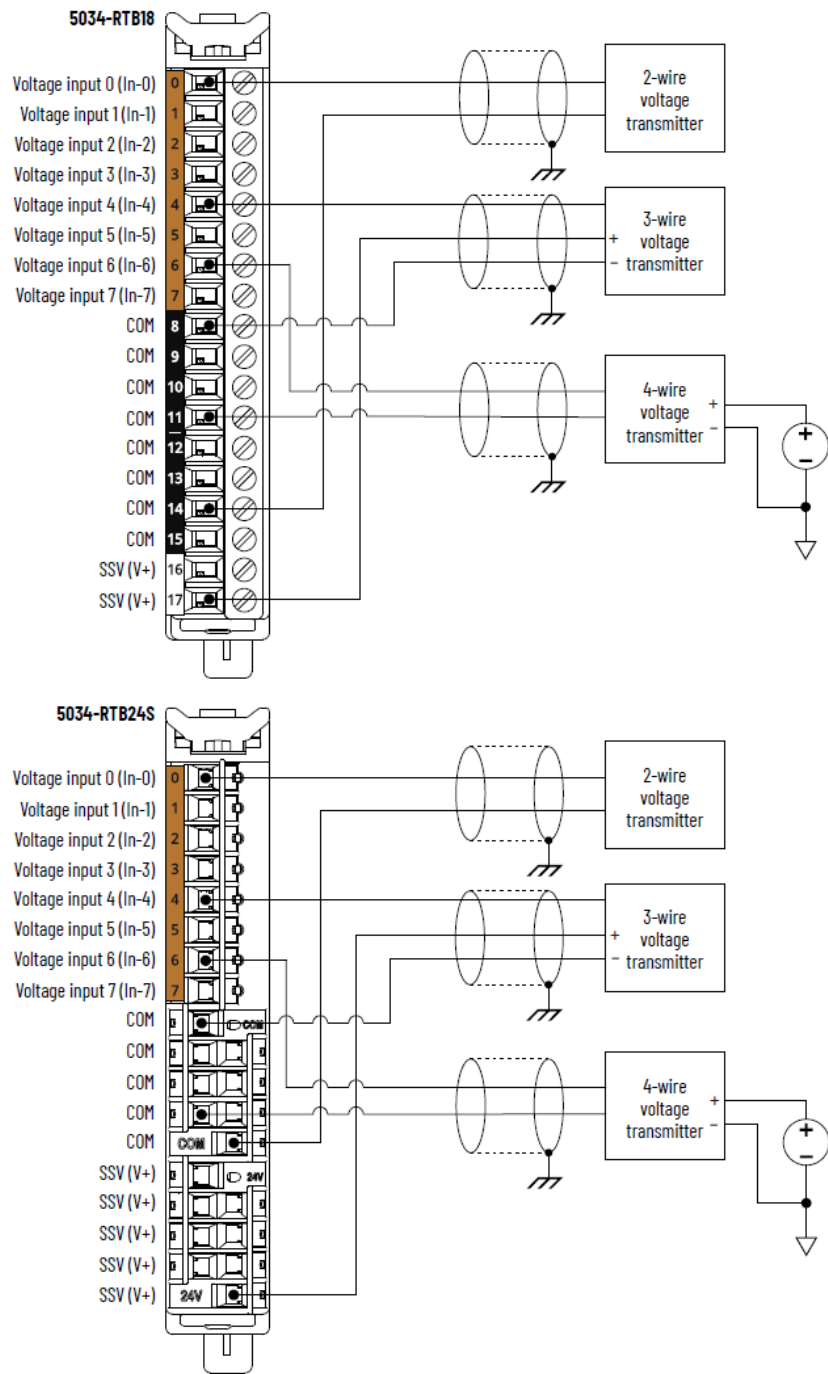


Figure 35. 5034-IF8V and 5034-IF8VXT Functional Block Diagram

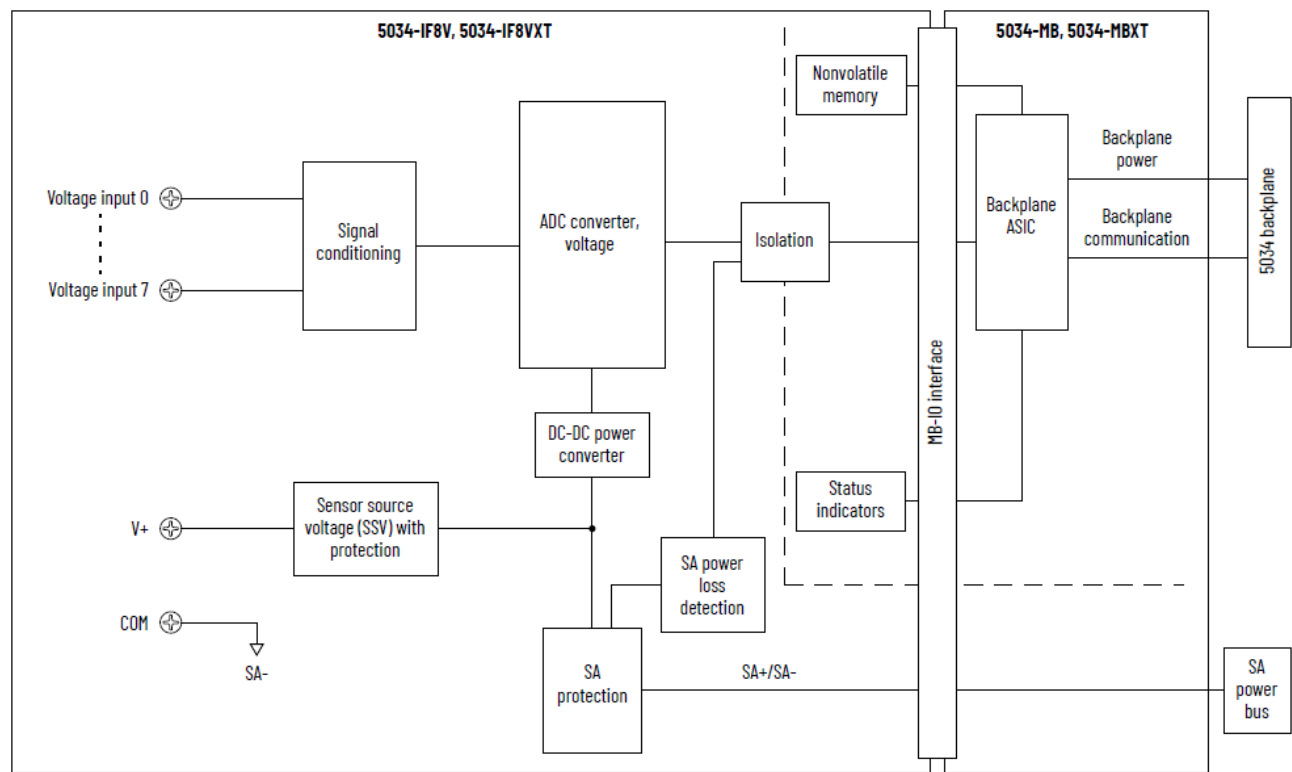


Table 38. Technical Specifications - 5034-IF8V, 5034-IF8VXT

| Attribute                                                                       | 5034-IF8V, 5034-IF8VXT                                                                                                                 |
|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Input range, voltage                                                            | ±10V<br>0...10V<br>0...5V                                                                                                              |
| Input impedance                                                                 | Voltage: ≥ 1 MΩ                                                                                                                        |
| Module conversion method                                                        | Sigma-delta                                                                                                                            |
| Resolution, voltage <sup>(1)</sup><br>At 50/60 Hz notch filter                  | 16 bits<br>15 bits for 0...5V range                                                                                                    |
| Calibrated accuracy at 25 °C (77 °F)                                            | Voltage (±10V and 0...10V range): 0.1% full scale with 50/60 Hz filter<br>Voltage (0...5V range): 0.2% full scale with 50/60 Hz filter |
| Calibrated accuracy over full temperature range<br>-25...+60 °C (-13...+140 °F) | Voltage (±10V and 0...10V range): 0.2% full scale with 50/60 Hz filter<br>Voltage (0...5V range): 0.4% full scale with 50/60 Hz filter |
| Fastest scan time per channel                                                   | 0.4 ms                                                                                                                                 |
| Fastest scan time per module                                                    | 1.2 ms                                                                                                                                 |
| Input notch filter (Hz) selections                                              | 10, 20, 50, 60 (Default), 100, 200, 400, 500, 1000, 5000, 10000, 15625, 31250                                                          |

**Table 38. Technical Specifications - 5034-IF8V, 5034-IF8VXT (continued)**

| Attribute                            | 5034-IF8V, 5034-IF8VXT                                      |
|--------------------------------------|-------------------------------------------------------------|
| Input digital filter                 | First order lag, 0 ms (Default)<br>0...32,767 ms (32.767 s) |
| Input overvoltage protection, max    | ±32V DC                                                     |
| Data value during overload condition | Full scale, overrange flag, data uncertain/data bad         |
| Open wire detection time             | Voltage: ≤ 2 sec                                            |
| Onboard data alarming                | Yes                                                         |
| Scaling to engineering units         | Yes                                                         |
| Real-time channel sampling           | Yes                                                         |
| Data format                          | IEEE 754<br>32-bit floating point                           |
| Rolling timestamp of inputs          | Yes                                                         |

(1) Notch filter dependent.

**Table 39. General Specifications - 5034-IF8V, 5034-IF8VXT**

| Attribute                      | 5034-IF8V, 5034-IF8VXT                   |
|--------------------------------|------------------------------------------|
| Number of inputs               | 8 channels, single-ended<br>Voltage mode |
| SA power voltage, nom          | 24V DC                                   |
| SA power voltage range         | 10...30V DC                              |
| SA power current, nom          | 1.1 A                                    |
| SA power current, max          | 1.2 A                                    |
| SA power current at no load    | 15 mA                                    |
| SA reverse polarity protection | Yes                                      |
| SSV voltage range              | Follow SA supply                         |
| SSV current, max               | 1.0 A                                    |
| SSV short circuit protection   | Yes                                      |
| Power dissipation, max         | 0.49 W                                   |

**Table 39. General Specifications - 5034-IF8V, 5034-IF8VXT (continued)**

| Attribute                      | 5034-IF8V, 5034-IF8VXT                                                                                                                                    |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Thermal dissipation, max       | 1.67 BTU/hr                                                                                                                                               |
| Isolation voltage              | 250V (continuous), Basic Insulation Type, System to Field<br>No isolation between SA power and input ports<br>No isolation between individual input ports |
| Calibration                    | Factory-calibrated<br>Manual calibration supported, see PointMax Analog I/O Modules User Manual, publication <a href="#">5034-UM003</a>                   |
| RIUP support                   | Yes                                                                                                                                                       |
| CIP Sync                       | Yes, slave only ordinary clock                                                                                                                            |
| Electronic keying              | Electronic keying via programming software                                                                                                                |
| RTB key positions (slot)       | 2, 6, 8                                                                                                                                                   |
| RTB supported <sup>(2)</sup>   | 5034-RTB18, 5034-RTB18S, 5034-RTB24S                                                                                                                      |
| Wiring category <sup>(2)</sup> | 2 - Signal ports<br>2 - Power ports                                                                                                                       |
| Wiring specification           | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a>  |
| Indicators                     | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>8 yellow/red I/O status indicators                                        |
| Dimensions (HxWxD), approx     | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                           |
| Weight, approx                 | 44.0 g (1.55 oz.) - 5034-IF8V<br>47.0 g (1.66 oz.) - 5034-IF8VXT                                                                                          |
| Enclosure type                 | None (Open-style)                                                                                                                                         |
| North American temp code       | T4                                                                                                                                                        |
| UKEX/ATEX temp code            | T4                                                                                                                                                        |
| IECEx temp code                | T4                                                                                                                                                        |

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

# 5034-IF4 and 5034-IF4XT Analog 4 Input Modules

Figure 36. 5034-IF4 and 5034-IF4XT Wiring Diagram - Current Mode

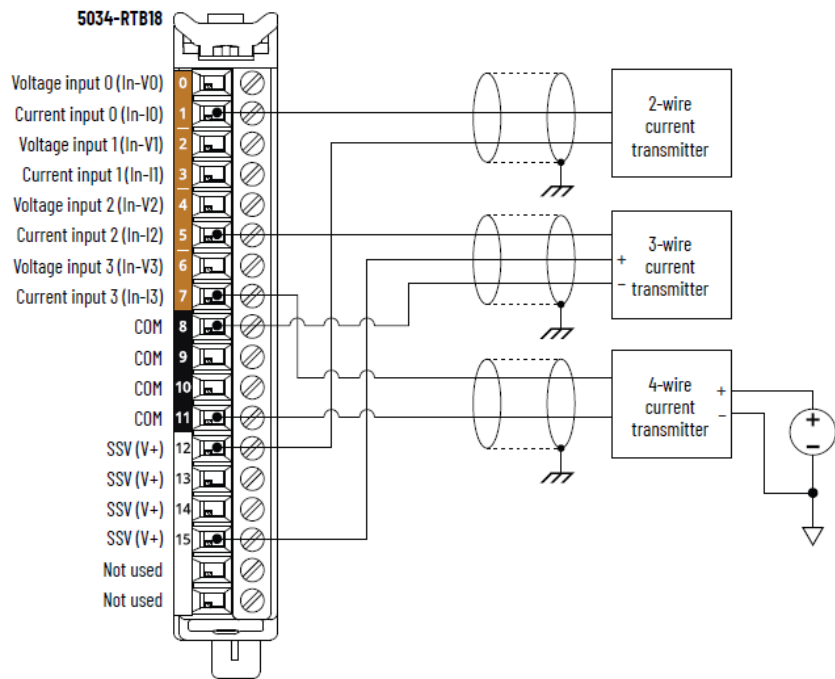


Figure 37. 5034-IF4 and 5034-IF4XT Wiring Diagram - Voltage Mode

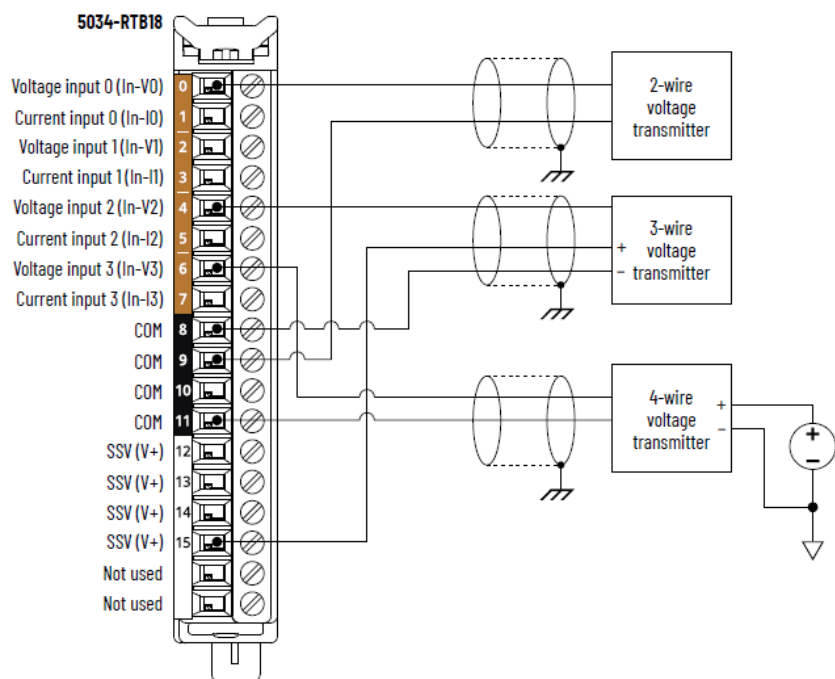


Figure 38. 5034-IF4 and 5034-IF4XT Functional Block Diagram

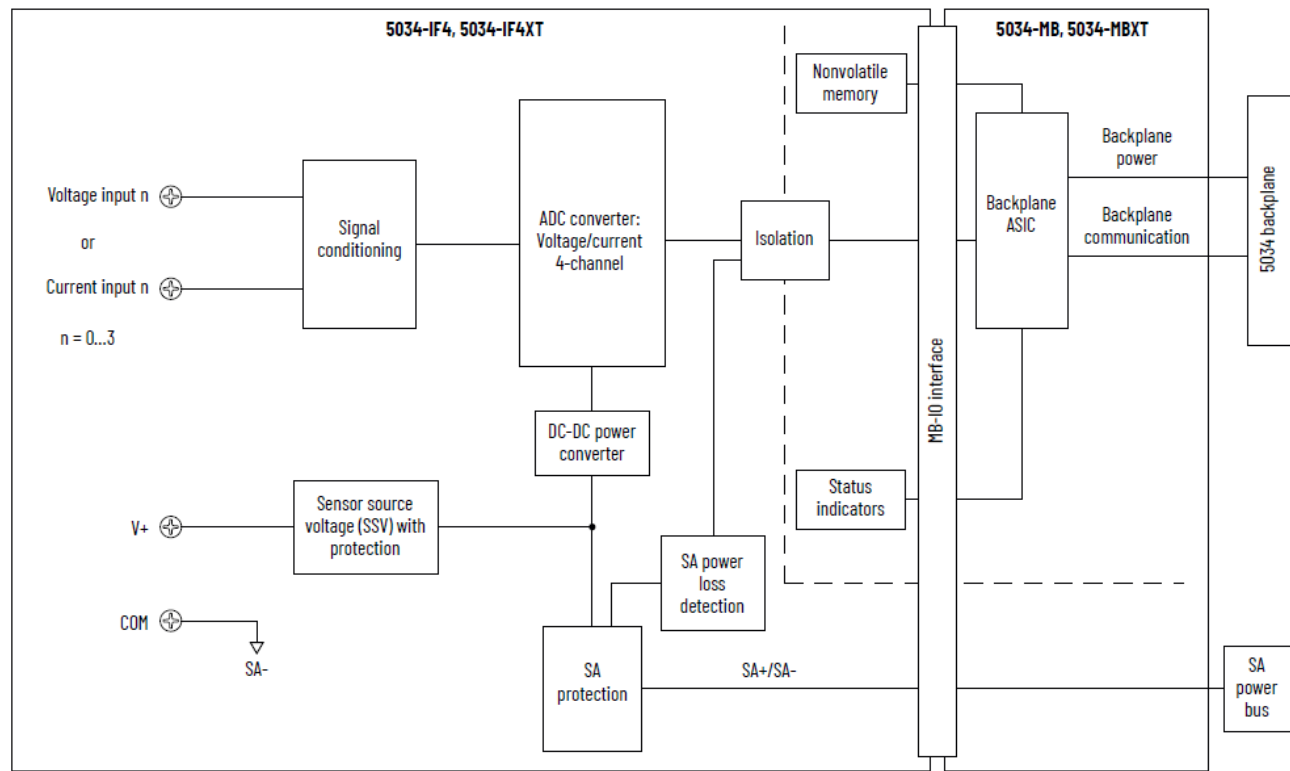


Table 40. Technical Specifications - 5034-IF4, 5034-IF4XT

| Attribute                                                      | 5034-IF4, 5034-IF4XT                                                                                                                                                                    |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input range, voltage                                           | ±10V<br>0...10V<br>0...5V                                                                                                                                                               |
| Input range, current                                           | 0...20 mA<br>4...20 mA                                                                                                                                                                  |
| Input impedance                                                | Voltage: ≥ 1 MΩ<br>Current: 250 Ω typical                                                                                                                                               |
| Module conversion method                                       | Sigma-delta                                                                                                                                                                             |
| Resolution, voltage <sup>(1)</sup><br>At 50/60 Hz notch filter | 16 bits<br>15 bits for 0...5V range                                                                                                                                                     |
| Resolution, current <sup>(1)</sup><br>At 50/60 Hz notch filter | 16 bits                                                                                                                                                                                 |
| Calibrated accuracy at 25 °C (77 °F)                           | Voltage (±10V and 0...10V range): 0.1% full scale with 50/60 Hz filter<br>Voltage (0...5V range): 0.2% full scale with 50/60 Hz filter<br>Current: 0.1% full scale with 50/60 Hz filter |

**Table 40. Technical Specifications - 5034-IF4, 5034-IF4XT (continued)**

| Attribute                                                                       | 5034-IF4, 5034-IF4XT                                                                                                                                                                               |
|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Calibrated accuracy over full temperature range<br>-25...+60 °C (-13...+140 °F) | Voltage ( $\pm 10V$ and $0...10V$ range): 0.2% full scale with 50/60 Hz filter<br>Voltage ( $0...5V$ range): 0.4% full scale with 50/60 Hz filter<br>Current: 0.2% full scale with 50/60 Hz filter |
| Fastest scan time per channel                                                   | 0.4 ms                                                                                                                                                                                             |
| Fastest scan time per module                                                    | 1.2 ms                                                                                                                                                                                             |
| Input notch filter (Hz) selections                                              | 10, 20, 50, 60 (Default), 100, 200, 400, 500, 1000, 5000, 10000, 15625, 31250                                                                                                                      |
| Input digital filter                                                            | First order lag, 0 ms (Default)<br>0...32,767 ms (32.767 s)                                                                                                                                        |
| HART handheld compliance                                                        | Yes                                                                                                                                                                                                |
| Input overvoltage protection, max                                               | $\pm 32V$ DC                                                                                                                                                                                       |
| Overcurrent protection                                                          | Yes                                                                                                                                                                                                |
| Data value during overload condition                                            | Full scale, overrange flag, data uncertain/data bad                                                                                                                                                |
| Open wire detection time                                                        | Voltage: $\leq 2$ sec<br>Current: $\leq 1$ sec                                                                                                                                                     |
| Onboard data alarming                                                           | Yes                                                                                                                                                                                                |
| Scaling to engineering units                                                    | Yes                                                                                                                                                                                                |
| Real-time channel sampling                                                      | Yes                                                                                                                                                                                                |
| Data format                                                                     | IEEE 754<br>32-bit floating point                                                                                                                                                                  |
| Rolling timestamp of inputs                                                     | Yes                                                                                                                                                                                                |

(1) Notch filter dependent

**Table 41. General Specifications - 5034-IF4, 5034-IF4XT**

| Attribute              | 5034-IF4, 5034-IF4XT                                                              |
|------------------------|-----------------------------------------------------------------------------------|
| Number of inputs       | 4 channels, single-ended<br>Configurable voltage or current mode at channel level |
| SA power voltage, nom  | 24V DC                                                                            |
| SA power voltage range | 10...30V DC                                                                       |

**Table 41. General Specifications - 5034-IF4, 5034-IF4XT (continued)**

| Attribute                               | 5034-IF4, 5034-IF4XT                                                                                                                                        |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SA power current, nom                   | 1.1 A                                                                                                                                                       |
| SA power current, max                   | 1.2 A                                                                                                                                                       |
| SA power current at no load             | 11 mA                                                                                                                                                       |
| SA reverse polarity protection          | Yes                                                                                                                                                         |
| SSV voltage range                       | Follow SA supply                                                                                                                                            |
| SSV current, max                        | 1.0 A                                                                                                                                                       |
| SSV short-circuit protection            | Yes                                                                                                                                                         |
| Power dissipation, max <sup>(1)</sup>   | 0.91 W                                                                                                                                                      |
| Thermal dissipation, max <sup>(1)</sup> | 3.11 BTU/hr                                                                                                                                                 |
| Isolation voltage                       | 250V (continuous), Basic Insulation Type, System to Field<br>No isolation between SA power and inputs ports<br>No isolation between individual inputs ports |
| Calibration                             | Factory-calibrated<br>Manual calibration supported, see PointMax Analog I/O Modules User Manual, publication <a href="#">5034-UM003</a>                     |
| RIUP support                            | Yes                                                                                                                                                         |
| CIP Sync                                | Yes, slave only ordinary clock                                                                                                                              |
| Electronic keying                       | Electronic keying via programming software                                                                                                                  |
| RTB key positions (slot)                | 2, 4, 10                                                                                                                                                    |
| RTB supported                           | 5034-RTB18, 5034-RTB18S                                                                                                                                     |
| Wiring category <sup>(2)</sup>          | 2 - Signal ports<br>2 - Power ports                                                                                                                         |
| Wiring specification                    | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a>    |
| Indicators                              | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>4 yellow/red I/O status indicators                                          |
| Dimensions (HxWxD), approx              | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                             |
| Weight, approx                          | 42.0 g (1.48 oz.) - 5034-IF4                                                                                                                                |

Table 41. General Specifications - 5034-IF4, 5034-IF4XT (continued)


| Attribute                | 5034-IF4, 5034-IF4XT           |
|--------------------------|--------------------------------|
|                          | 45.0 g (1.59 oz.) - 5034-IF4XT |
| Enclosure type           | None (Open-style)              |
| North American temp code | T4                             |
| UKEX/ATEX temp code      | T4                             |
| IECEx temp code          | T4                             |

(1) Value is measured at 60 °C (140 °F). Power dissipation varies with temperature.


(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

5034-IF4IH and 5034-IF4IHXT Analog 4 Input Isolated HART Modules


Figure 39. 5034-IF4IH and 5034-IF4IHXT Wiring Diagram - Current Mode

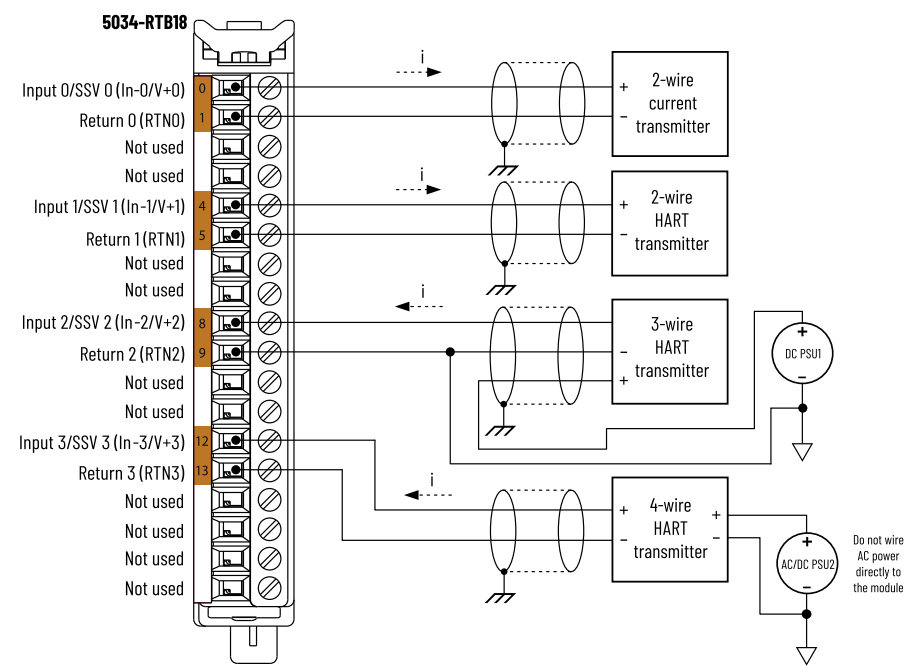

### Figure 40. 5034-IF4IH and 5034-IF4IHXT Wiring Diagram - Voltage Mode

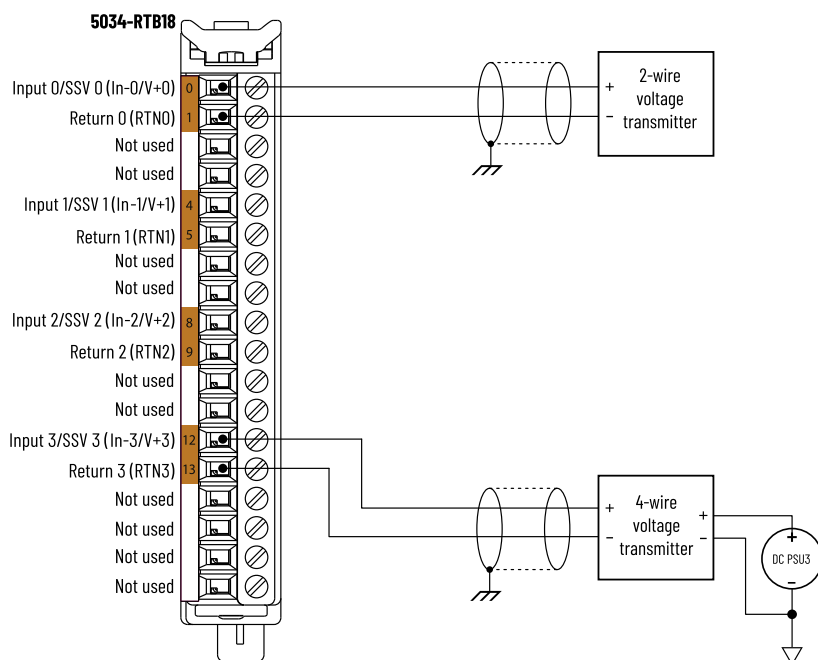

**Figure 41. 5034-IF4IH and 5034-IF4IHXT Functional Block Diagram**

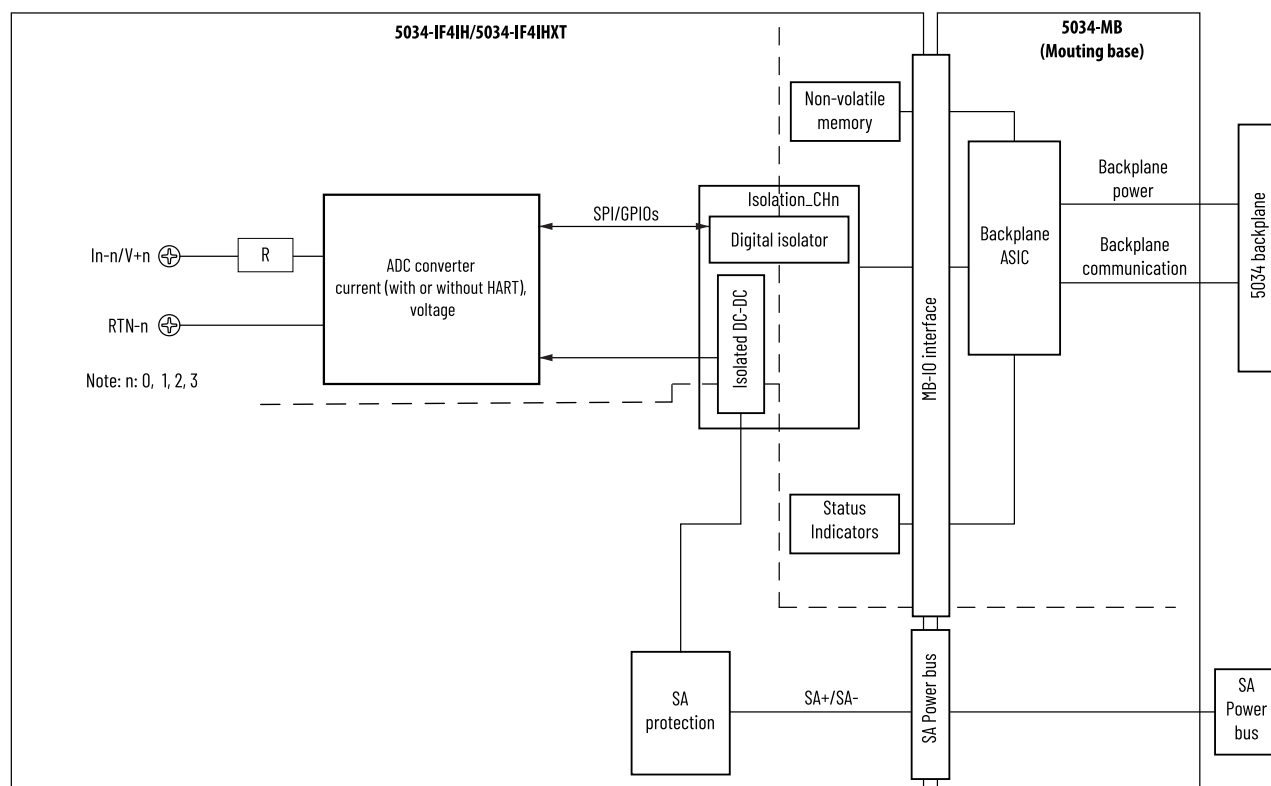

### Table 42. Technical Specifications - 5034-IF4IH, 5034-IF4IHXT

|                      |                          |
|----------------------|--------------------------|
| Attribute            | 5034-IF4IH, 5034-IF4IHXT |
| Input range, voltage | -10...+10V               |

**Table 42. Technical Specifications - 5034-IF4IH, 5034-IF4IHXT (continued)**

| Attribute                                                                  | 5034-IF4IH, 5034-IF4IHXT                                                                                                                                                                                                                                                                                                 |
|----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                            | 0...10V<br>0...5V                                                                                                                                                                                                                                                                                                        |
| Input range, current                                                       | 0...20 mA<br>4...20 mA<br>4...20 mA - HART                                                                                                                                                                                                                                                                               |
| Input impedance, voltage                                                   | $\geq 1\text{ M}\Omega$                                                                                                                                                                                                                                                                                                  |
| Input impedance, current, typical<br>without HART                          | 155 $\Omega$                                                                                                                                                                                                                                                                                                             |
| Input impedance, current, typical<br>with HART                             | 265 $\Omega$                                                                                                                                                                                                                                                                                                             |
| Module conversion method                                                   | Sigma-delta<br>16-bit ADC per channel                                                                                                                                                                                                                                                                                    |
| HART update rate                                                           | Typically 1 s<br><br>Additional device variables, configured commands, pass through messages, handheld communicators, secondary masters, communication errors, or configuration changes can significantly increase the update time.                                                                                      |
| Resolution, voltage<br>At 20 Hz notch filter                               | -10...+10V: 16 bits (366 $\mu\text{V/bit}$ )<br>0...10V: 15 bits (366 $\mu\text{V/bit}$ )<br>0...5V: 14 bits (732 $\mu\text{V/bit}$ )                                                                                                                                                                                    |
| Resolution, current<br>At 20 Hz notch filter                               | 0...20 mA: 15 bits (763 $\mu\text{A/bit}$ )<br>4...20 mA: 15 bits (763 $\mu\text{A/bit}$ )                                                                                                                                                                                                                               |
| Calibrated accuracy at 25 °C (77 °F),<br>HART disabled                     | Voltage: -10...+10V, $\pm 0.1\%$ full scale with 20 Hz filter<br>Voltage: 0...10V, $\pm 0.1\%$ full scale with 20 Hz filter<br>Voltage: 0...5V, $\pm 0.2\%$ full scale with 20 Hz filter<br>Current: 0...20 mA, $\pm 0.1\%$ full scale with 20 Hz filter<br>Current: 4...20 mA, $\pm 0.1\%$ full scale with 20 Hz filter |
| Calibrated accuracy at 25 °C (77 °F),<br>HART enabled                      | Current: 4...20 mA, $\pm 0.1\%$ full scale with 10 Hz filter<br>Current: 4...20 mA, $\pm 0.1\%$ full scale with 20 Hz filter<br>Current: 4...20 mA, $\pm 0.3\%$ full scale with 200 Hz filter<br>Current: 4...20 mA, $\pm 0.6\%$ full scale with 1200 Hz filter                                                          |
| Calibrated accuracy over temperature range<br>-25...+60 °C (-13...+140 °F) | Voltage: -10...+10V, $\pm 0.2\%$ full scale with 20 Hz filter<br>Voltage: 0...10V, $\pm 0.2\%$ full scale with 20 Hz filter<br>Voltage: 0...5V, $\pm 0.4\%$ full scale with 20 Hz filter                                                                                                                                 |

**Table 42. Technical Specifications - 5034-IF4IH, 5034-IF4IHXT (continued)**

| Attribute                                                                                  | 5034-IF4IH, 5034-IF4IHXT                                                                                                                                                                                                                                          |
|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| HART disabled                                                                              | Current: 0...20 mA, $\pm 0.2\%$ full scale with 20 Hz filter<br>Current: 4...20 mA, $\pm 0.2\%$ full scale with 20 Hz filter                                                                                                                                      |
| Calibrated accuracy over temperature range<br>-25...+60 °C (-13...+140 °F)<br>HART enabled | Current: 4...20 mA, $\pm 0.2\%$ full scale with 10 Hz filter<br>Current: 4...20 mA, $\pm 0.2\%$ full scale with 20 Hz filter<br>Current: 4...20 mA, $\pm 0.35\%$ full scale with 200 Hz filter<br>Current: 4...20 mA, $\pm 0.65\%$ full scale with 1200 Hz filter |
| Fastest scan time                                                                          | 1.0 ms with 9600 Hz notch filter                                                                                                                                                                                                                                  |
| Fastest scan time, per module                                                              | 1.0 ms                                                                                                                                                                                                                                                            |
| Input notch filter (Hz) selections                                                         | HART disabled: 10, 20 with 50/60 Hz noise rejection (Default), 200, 1200, 4800, 9600<br>HART enabled: 10, 20 with 50/60 Hz noise rejection (Default), 200, 1200                                                                                                   |
| Input digital filter                                                                       | First order lag, 0 ms (Default)<br>0...32,767 ms (32.767 s)                                                                                                                                                                                                       |
| Input overvoltage protection, max                                                          | $\pm 32$ V DC                                                                                                                                                                                                                                                     |
| Overcurrent protection                                                                     | Yes, 25 mA typical                                                                                                                                                                                                                                                |
| Data value during overload condition                                                       | Full scale, overrange flag, data uncertain/data fault                                                                                                                                                                                                             |
| Open circuit detection time                                                                | Voltage: 4 s typical<br>Current: 0.5 ms typical                                                                                                                                                                                                                   |
| Onboard data alarming                                                                      | Yes                                                                                                                                                                                                                                                               |
| Scaling to engineering units                                                               | Yes                                                                                                                                                                                                                                                               |
| Real-time channel sampling                                                                 | Yes                                                                                                                                                                                                                                                               |
| Data format                                                                                | IEEE 754<br>32-bit floating point                                                                                                                                                                                                                                 |
| Timestamp of inputs                                                                        | Yes                                                                                                                                                                                                                                                               |
| CIP Sync                                                                                   | Yes                                                                                                                                                                                                                                                               |

**Table 43. General Specifications - 5034-IF4IH, 5034-IF4IHXT**

| Attribute        | 5034-IF4IH, 5034-IF4IHXT                                                               |
|------------------|----------------------------------------------------------------------------------------|
| Number of inputs | 4 channels, individually isolated<br>Supports current sourcing and differential signal |

**Table 43. General Specifications - 5034-IF4IH, 5034-IF4IHXT (continued)**

| Attribute                                     | 5034-IF4IH, 5034-IF4IHXT                                                                                                                                                                                                                                                                                    |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                               | Configurable voltage or current mode at channel level                                                                                                                                                                                                                                                       |
| SA power voltage, nom                         | 24V DC                                                                                                                                                                                                                                                                                                      |
| SA power voltage range                        | 10...30V DC (Derate to 3 channels for 10...18V DC)                                                                                                                                                                                                                                                          |
| SA power current, nom                         | 125 mA                                                                                                                                                                                                                                                                                                      |
| SA power current, max                         | 300 mA                                                                                                                                                                                                                                                                                                      |
| SA power current at no load                   | 27 mA                                                                                                                                                                                                                                                                                                       |
| Isolated sourcing voltage, min <sup>(1)</sup> | 20 V DC                                                                                                                                                                                                                                                                                                     |
| Sourcing current limit per channel, max       | 25 mA, typical                                                                                                                                                                                                                                                                                              |
| SSV overcurrent detection                     | Yes                                                                                                                                                                                                                                                                                                         |
| Power dissipation, max                        | 1.60 W                                                                                                                                                                                                                                                                                                      |
| Thermal dissipation, max                      | 5.46 BTU/hr                                                                                                                                                                                                                                                                                                 |
| Isolation voltage                             | 250V (continuous), Basic Insulation Type, between system and SA power<br>250V (continuous), Basic Insulation Type, between SA power and input ports<br>250V (continuous), Basic Insulation Type, between individual input ports<br>250V (continuous), Basic Insulation Type, between system and input ports |
| Calibration                                   | Factory-calibrated<br>Manual calibration supported                                                                                                                                                                                                                                                          |
| RIUP support                                  | Yes                                                                                                                                                                                                                                                                                                         |
| Electronic keying                             | Electronic keying via programming software                                                                                                                                                                                                                                                                  |
| RTB key position (slot)                       | 2, 6, 10                                                                                                                                                                                                                                                                                                    |
| RTB supported                                 | 5034-RTB18, 5034-RTB18S                                                                                                                                                                                                                                                                                     |
| Wiring category <sup>(2)</sup>                | 2 - Signal ports<br>2 - Power ports                                                                                                                                                                                                                                                                         |
| Wiring specification                          | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a>                                                                                                                                                    |
| Indicators                                    | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>4 yellow/red I/O status indicators                                                                                                                                                                                          |

**Table 43. General Specifications - 5034-IF4IH, 5034-IF4IHXT (continued)**

| Attribute                  | 5034-IF4IH, 5034-IF4IHXT                                           |
|----------------------------|--------------------------------------------------------------------|
| Dimensions (HxWxD), approx | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                    |
| Weight, approx             | 51.0 g (1.80 oz.) - 5034-IF4IH<br>53.0 g (1.87 oz.) - 5034-IF4IHXT |
| Enclosure type             | None (Open-style)                                                  |
| North American temp code   | T4                                                                 |
| UKEX/ATEX temp code        | T4                                                                 |
| IECEx temp code            | T4                                                                 |

(1) 20V DC is connected to screw via series impedance. Series impedance is as per value published. Measured voltage is Sourcing Voltage minus Voltage drop across series impedance based on the current drawn.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## 5034-IRT4I and 5034-IRT4IXT Analog 4 Input Isolated RTD/TC Modules

**Figure 42. 5034-IRT4I and 5034-IRT4IXT Wiring Diagram – RTD Mode**

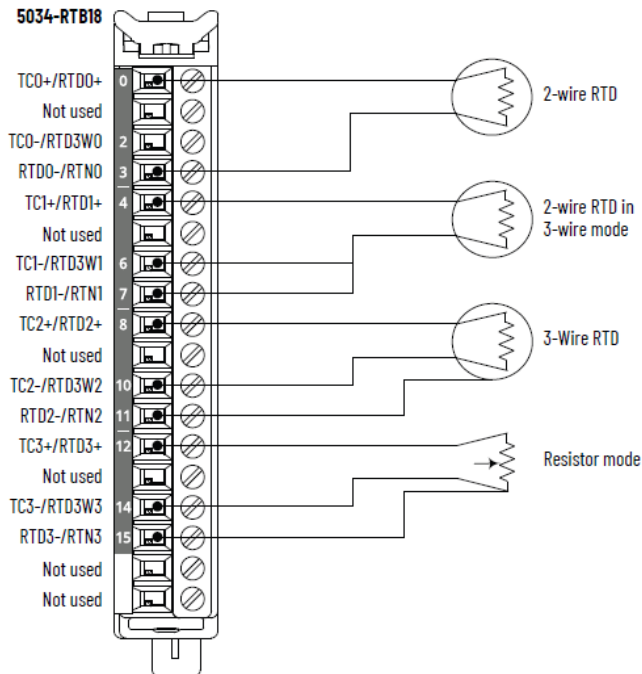


Figure 43. 5034-IRT4I and 5034-IRT4IXT Wiring Diagram – Thermocouple Mode

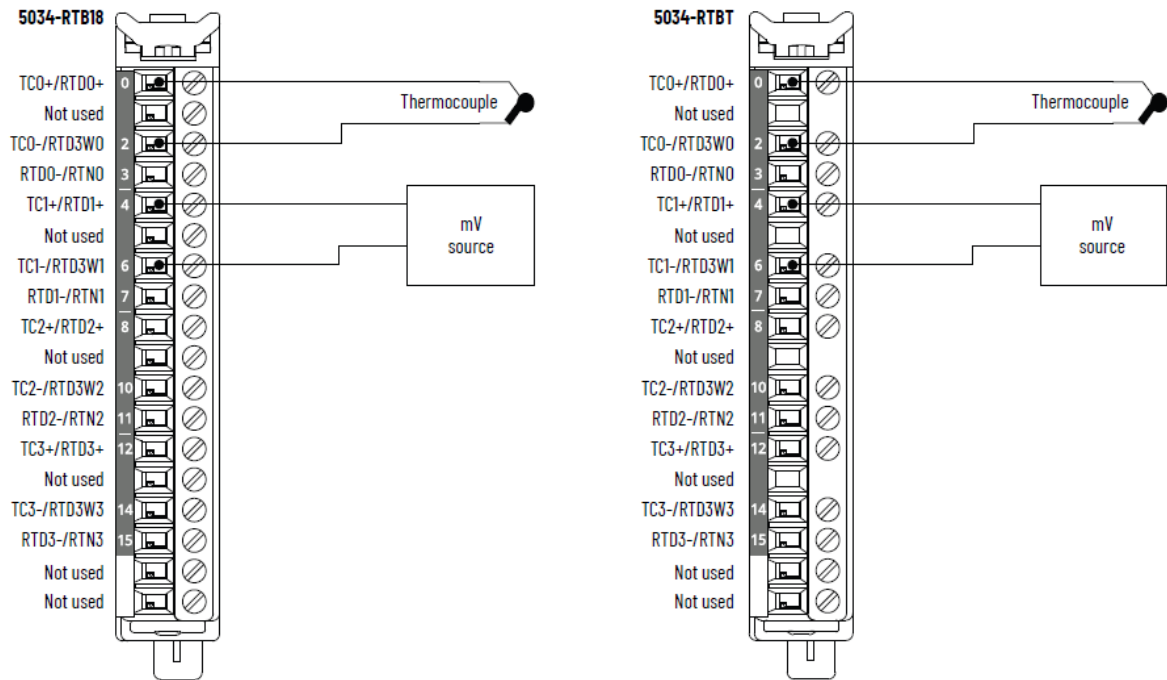


Figure 44. 5034-IRT4I and 5034-IRT4IXT Functional Block Diagram

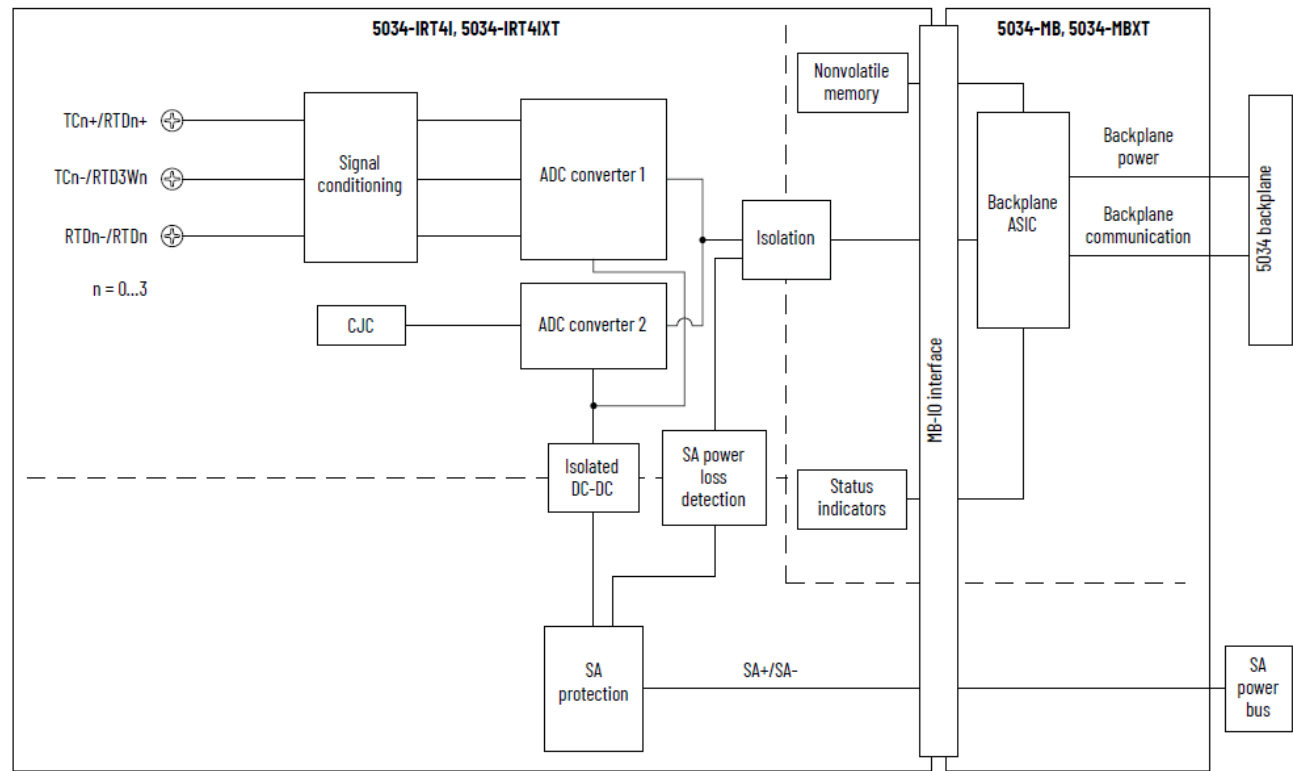


Table 44. Technical Specifications - 5034-IRT4I, 5034-IRT4IXT

| Attribute              | 5034-IRT4I, 5034-IRT4IXT |
|------------------------|--------------------------|
| Input range, resistive | 1...500 $\Omega$         |

**Table 44. Technical Specifications - 5034-IRT4I, 5034-IRT4IXT (continued)**

| Attribute                                                      | 5034-IRT4I, 5034-IRT4IXT                                                                                                                                                                                                                                                                                  |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                | 2...1000 $\Omega$<br>4...2000 $\Omega$<br>8...4000 $\Omega$                                                                                                                                                                                                                                               |
| Input type, RTD                                                | 100, 200, 500, 1000 $\Omega$ platinum, $\alpha = 385$<br>100, 200, 500, 1000 $\Omega$ platinum, $\alpha = 3916$<br>120 $\Omega$ nickel, $\alpha = 672$<br>100, 120, 200, 500 $\Omega$ nickel, $\alpha = 618$<br>10 $\Omega$ copper 427                                                                    |
| Input range, thermocouple/millivolt                            | $\pm 100$ mV                                                                                                                                                                                                                                                                                              |
| Input type, thermocouple                                       | B, C, D, E, J, K, N, R, S, T, TXK/XK(L)                                                                                                                                                                                                                                                                   |
| Input impedance                                                | Thermocouple/millivolt: $> 1$ M $\Omega$<br>RTD: $> 1$ M $\Omega$                                                                                                                                                                                                                                         |
| Common mode voltage (channel to channel)                       | 250V (continuous), Basic Isolation                                                                                                                                                                                                                                                                        |
| Module conversion method                                       | Sigma-delta, 24-bit multiplexed ADC                                                                                                                                                                                                                                                                       |
| Resolution, RTD/resistive<br>At 50/60 Hz notch filter          | 16 bit                                                                                                                                                                                                                                                                                                    |
| Resolution, thermocouple/millivolt<br>At 50/60 Hz notch filter | 16 bit                                                                                                                                                                                                                                                                                                    |
| RTD excitation current                                         | 250 $\mu$ A for 1000, 2000, 4000 $\Omega$ range<br>500 $\mu$ A for 500 $\Omega$ range                                                                                                                                                                                                                     |
| Thermocouple linearization                                     | ITS-90                                                                                                                                                                                                                                                                                                    |
| CJ mode                                                        | Onboard CJC, RTB CJC, remote CJC                                                                                                                                                                                                                                                                          |
| Onboard CJC inputs<br>(for thermocouple mode use only)         | CJC sensors<br>Four thermistors embedded in 5034-IRT4I and 5034-IRT4IXT<br>Vishay NTC50805E3103FHT                                                                                                                                                                                                        |
| Onboard CJC sensor accuracy                                    | $\pm 3.0$ $^{\circ}$ C, $0$ $^{\circ}$ C $< T_{amb} < 60$ $^{\circ}$ C ( $\pm 5.4$ $^{\circ}$ F, $32$ $^{\circ}$ F $< T_{amb} < 140$ $^{\circ}$ F)<br>$\pm 4.0$ $^{\circ}$ C, $-25$ $^{\circ}$ C $< T_{amb} < 0$ $^{\circ}$ C ( $\pm 7.2$ $^{\circ}$ F, $-13$ $^{\circ}$ F $< T_{amb} < 32$ $^{\circ}$ F) |
| RTB CJC inputs<br>(for thermocouple mode use only)             | CJC sensors<br>Four thermistors embedded in 5034-RTBT and 5034-RTBTS<br>TE Connectivity TE 10K3A1A                                                                                                                                                                                                        |

**Table 44. Technical Specifications - 5034-IRT4I, 5034-IRT4IXT (continued)**

| Attribute                                                                       | 5034-IRT4I, 5034-IRT4IXT                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RTB CJC sensor accuracy                                                         | $\pm 0.6\text{ }^{\circ}\text{C}$ , $0\text{ }^{\circ}\text{C} < T_{\text{amb}} < 60\text{ }^{\circ}\text{C}$ ( $\pm 1.1\text{ }^{\circ}\text{F}$ , $32\text{ }^{\circ}\text{F} < T_{\text{amb}} < 140\text{ }^{\circ}\text{F}$ )<br>$\pm 1.2\text{ }^{\circ}\text{C}$ , $-25\text{ }^{\circ}\text{C} < T_{\text{amb}} < 0\text{ }^{\circ}\text{C}$ ( $\pm 2.2\text{ }^{\circ}\text{F}$ , $-13\text{ }^{\circ}\text{F} < T_{\text{amb}} < 32\text{ }^{\circ}\text{F}$ ) |
| CJC conversion method                                                           | 12-bit SAR                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Calibrated accuracy at 25 °C (77 °F)                                            | Thermocouple/millivolt: 0.1% full scale with 50/60 Hz filter<br>RTD: 500 $\Omega$ , 1 k $\Omega$ , 2 k $\Omega$ , 4 k $\Omega$ range, 0.1% full scale with 50/60 Hz filter                                                                                                                                                                                                                                                                                              |
| Calibrated accuracy over full temperature range<br>-25...+60 °C (-13...+140 °F) | Thermocouple/millivolt: 0.25% full scale with 50/60 Hz filter<br>RTD: 500 $\Omega$ , 1 k $\Omega$ , 2 k $\Omega$ , 4 k $\Omega$ range, 0.25% full scale with 50/60 Hz filter                                                                                                                                                                                                                                                                                            |
| Fastest scan time per channel                                                   | 0.36 ms                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Fastest scan time per module                                                    | 0.36 ms                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Input notch filter selections (Hz)                                              | 10, 20, 50, 60 (Default), 100, 200, 500, 1000, 2500, 5000                                                                                                                                                                                                                                                                                                                                                                                                               |
| Hardware input filter                                                           | 1 kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Input digital filter                                                            | First order lag, 0 ms (Default)<br>0...32,767 ms (32.767 s)                                                                                                                                                                                                                                                                                                                                                                                                             |
| Normal mode noise rejection ratio                                               | 65 dB @ 50/60 Hz, notch filter dependent                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Open wire detection time                                                        | < 200 ms                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Overvoltage protection, max                                                     | 32V DC                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Scaling to engineering units                                                    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Real-time channel sampling                                                      | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Rolling timestamp of inputs                                                     | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Data format                                                                     | IEEE 754<br>32-bit floating point                                                                                                                                                                                                                                                                                                                                                                                                                                       |

**Table 45. Technical Specifications - 5034-IRT4I, 5034-IRT4IXT - RTD Sensors**

| RTD Sensor Types <sup>(1)</sup>      | Temperature Range                                                 |
|--------------------------------------|-------------------------------------------------------------------|
| 100, 200, 500, 1000 $\Omega$ PT 385  | -200...+870 °C<br>-328...+1598 °F<br>73...1143 K<br>132...2058 °R |
| 100, 200, 500, 1000 $\Omega$ PT 3916 | -200...+630 °C                                                    |

**Table 45. Technical Specifications - 5034-IRT4I, 5034-IRT4IXT - RTD Sensors (continued)**

| RTD Sensor Types <sup>(1)</sup> | Temperature Range                                               |
|---------------------------------|-----------------------------------------------------------------|
|                                 | -328...+1166 °F<br>73...903 K<br>132...1626 °R                  |
| 10 Ω CU 427                     | -200...+260 °C<br>-328...+500 °F<br>73...533 K<br>132...960 °R  |
| 120 Ω NI 672                    | -80...+320 °C<br>-112...+608 °F<br>193...593 K<br>348...1068 °R |
| 100, 120, 200, 500 Ω NI 618     | -60...+250 °C<br>-76...+482 °F<br>213...523 K<br>384...942 °R   |

(1) Each sensor type supports all temperature ranges listed.

**Table 46. Technical Specifications - 5034-IRT4I, 5034-IRT4IXT - Thermocouples**

| Thermocouple Type   | Temperature Range                                             |
|---------------------|---------------------------------------------------------------|
| Thermocouple type B | 21...1820 °C<br>68...3308 °F<br>293...2093 K<br>528...3768 °R |
| Thermocouple type C | 0...2315 °C<br>32...4199 °F<br>273...2588 K<br>492...4659 °R  |
| Thermocouple type D | 0...2315 °C<br>32...4199 °F<br>273...2588 K<br>492...4659 °R  |
| Thermocouple type E | -270...+1000 °C<br>-454...+1832 °F                            |

**Table 46. Technical Specifications - 5034-IRT4I, 5034-IRT4IXT - Thermocouples (continued)**

| Thermocouple Type           | Temperature Range                                                  |
|-----------------------------|--------------------------------------------------------------------|
|                             | 3...1273 K<br>6...2292 °R                                          |
| Thermocouple type J         | -210...+1200 °C<br>-346...+2192 °F<br>63...1473 K<br>114...2652 °R |
| Thermocouple type K         | -270...+1372 °C<br>-454...+2502 °F<br>3...1645 K<br>6...2961 °R    |
| Thermocouple type N         | -270...+1300 °C<br>-454...+2372 °F<br>3...1573 K<br>6...2832 °R    |
| Thermocouple type R         | -50...+1768 °C<br>-58...+3215 °F<br>223...2041 K<br>402...3674 °R  |
| Thermocouple type S         | -50...+1768 °C<br>-58...+3215 °F<br>223...2041 K<br>402...3674 °R  |
| Thermocouple type T         | -270...+400 °C<br>-454...+752 °F<br>3...673 K<br>6...1212 °R       |
| Thermocouple type TXK/XK(L) | -200...+800 °C<br>-328...+1472 °F<br>73...1073 K<br>132...1932 °R  |

**Table 47. General Specifications - 5034-IRT4I, 5034-IRT4IXT**

| Attribute                               | 5034-IRT4I, 5034-IRT4IXT                                                                                                                                                                                    |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of inputs                        | 4 channels (4 isolated group)                                                                                                                                                                               |
| SA power voltage, nom                   | 24V DC                                                                                                                                                                                                      |
| SA power voltage range                  | 10...30V DC                                                                                                                                                                                                 |
| SA power current, nom                   | 50 mA                                                                                                                                                                                                       |
| SA power current, max                   | 0.1 A                                                                                                                                                                                                       |
| SA power current at no load             | 11 mA                                                                                                                                                                                                       |
| SA reverse polarity protection          | Yes                                                                                                                                                                                                         |
| Power dissipation, max <sup>(1)</sup>   | 0.42 W                                                                                                                                                                                                      |
| Thermal dissipation, max <sup>(1)</sup> | 1.43 BTU/hr                                                                                                                                                                                                 |
| Isolation voltage                       | 250V (continuous), Basic Insulation Type, System to Field<br>250V (continuous), Basic Insulation Type, SA power and input ports<br>250V (continuous), Basic Insulation Type, between individual input ports |
| Calibration                             | Factory-calibrated<br>Manual calibration supported, see PointMax Analog I/O Modules User Manual, publication <a href="#">5034-UM003</a>                                                                     |
| RIUP support                            | Yes                                                                                                                                                                                                         |
| CIP Sync                                | Yes, slave only ordinary clock                                                                                                                                                                              |
| Electronic keying                       | Electronic keying via programming software                                                                                                                                                                  |
| RTB key positions (slot)                | 2, 7, 10                                                                                                                                                                                                    |
| RTB supported                           | 5034-RTB18, 5034-RTB18S, 5034-RTBT, 5034-RTBTS<br>To help achieve better accuracy, use the CJC thermistors that are embedded in 5034-RTBT and 5034-RTBTS.                                                   |
| Wiring category <sup>(2)</sup>          | 2 - Signal ports<br>2 - Power ports                                                                                                                                                                         |
| Wiring specification                    | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a>                                                    |
| Indicators                              | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>4 yellow/red I/O status indicators                                                                                          |
| Dimensions (HxWxD), approx              | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                                                                             |
| Weight, approx                          | 45.0 g (1.59 oz.) - 5034-IRT4I                                                                                                                                                                              |

Table 47. General Specifications - 5034-IRT4I, 5034-IRT4IXT (continued)

| Attribute                | 5034-IRT4I, 5034-IRT4IXT         |
|--------------------------|----------------------------------|
|                          | 48.0 g (1.69 oz.) - 5034-IRT4IXT |
| Enclosure type           | None (Open-style)                |
| North American temp code | T4                               |
| UKEX/ATEX temp code      | T4                               |
| IECEx temp code          | T4                               |

(1) Value is measured at 60 °C (140 °F). Power dissipation varies with temperature.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## 5034-OF4 and 5034-OF4XT Analog 4 Output Modules

Figure 45. 5034-OF4 and 5034-OF4XT Wiring Diagram - Current Mode

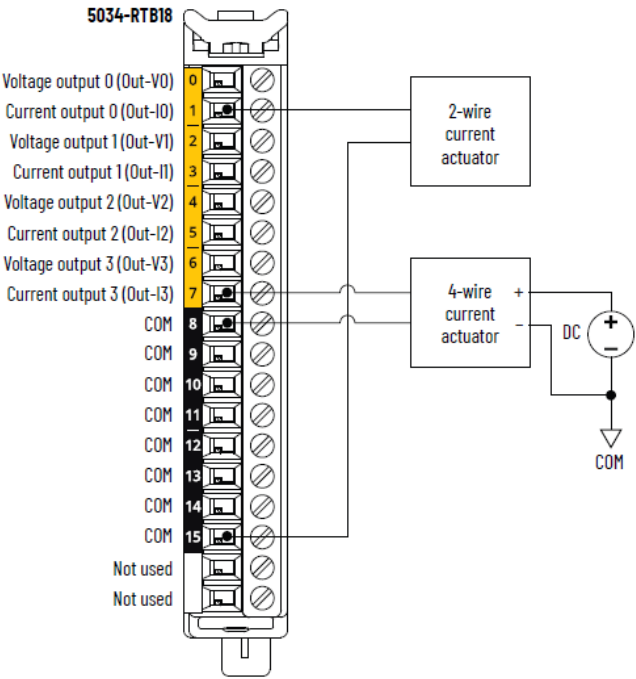


Figure 46. 5034-OF4 and 5034-OF4XT Wiring Diagram - Voltage Mode

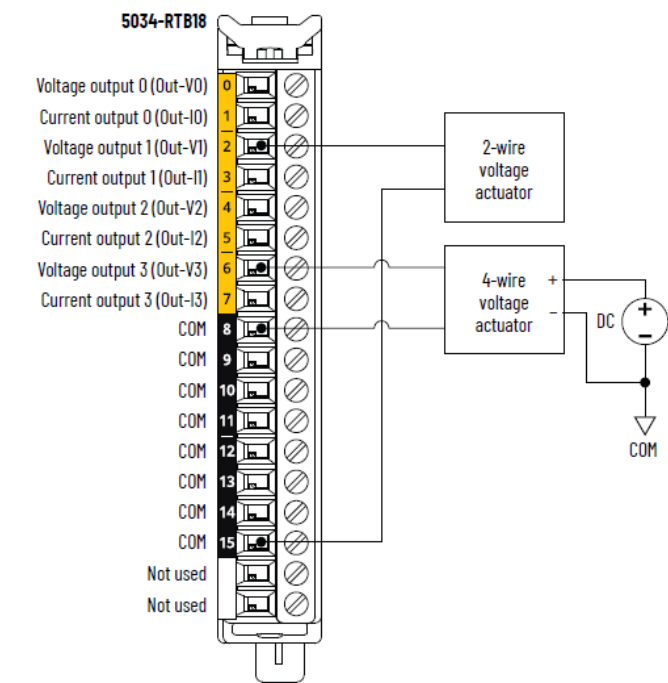


Figure 47. 5034-OF4 and 5034-OF4XT Functional Block Diagram

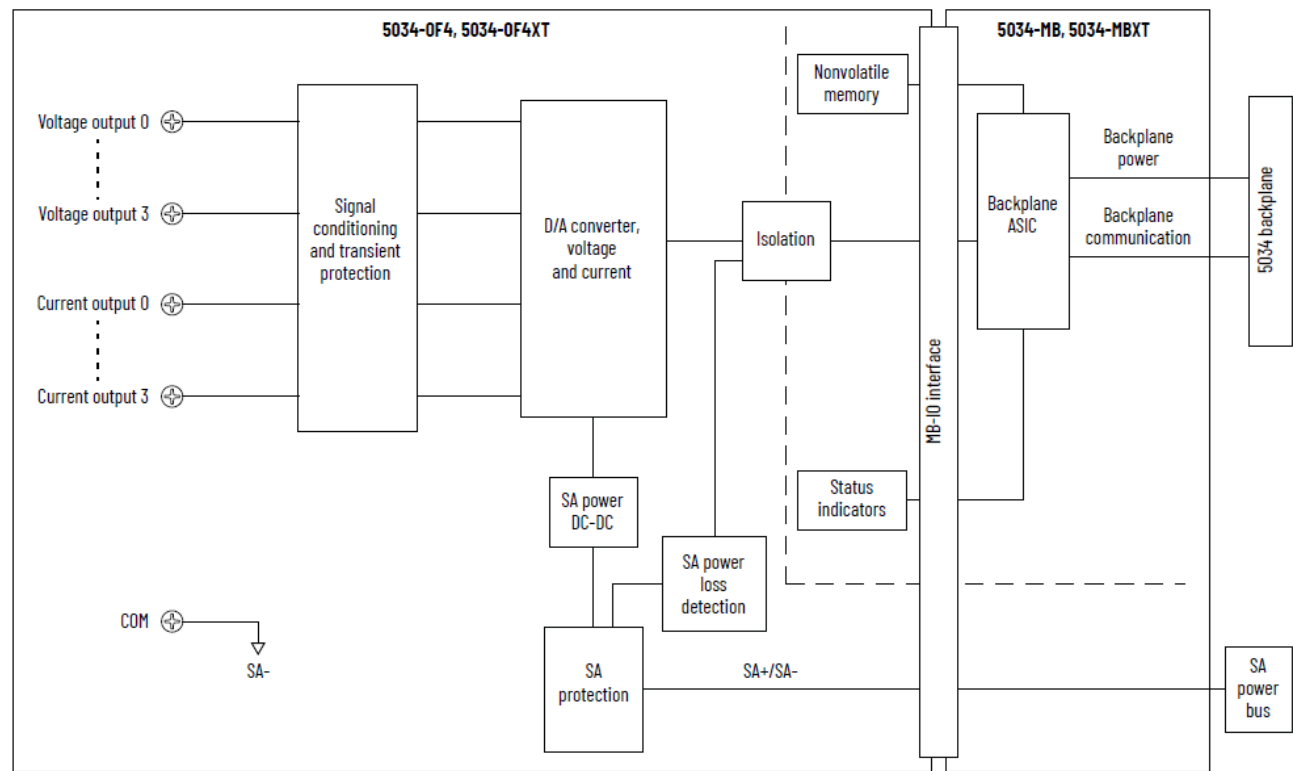


Table 48. Technical Specifications - 5034-OF4, 5034-OF4XT

| Attribute             | 5034-OF4, 5034-OF4XT |
|-----------------------|----------------------|
| Output range, voltage | ±10V                 |

**Table 48. Technical Specifications - 5034-0F4, 5034-0F4XT (continued)**

| Attribute                                                                       | 5034-0F4, 5034-0F4XT                                                                     |
|---------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
|                                                                                 | 0...10V<br>0...5V                                                                        |
| Output range, current                                                           | 0...20 mA<br>4...20 mA                                                                   |
| Resolution, voltage                                                             | ±10V: 15 bits<br>0...10V: 16 bits<br>0...5V: 16 bits                                     |
| Resolution, current                                                             | 16 bits                                                                                  |
| Calibrated accuracy at 25 °C (77 °F)                                            | Voltage: 0.10% full scale<br>Current: 0.10% full scale                                   |
| Calibrated accuracy over full temperature range<br>-25...+60 °C (-13...+140 °F) | Voltage: 0.2% full scale<br>Current: 0.2% full scale                                     |
| Drive capability                                                                | Voltage: 3000 Ω min<br>Current: 500 Ω max                                                |
| Capacitive load, max (voltage mode only)                                        | 1 μF                                                                                     |
| Inductive load, max (current mode only)                                         | 1 mH                                                                                     |
| HART handheld compliance                                                        | Yes                                                                                      |
| Open wire detection                                                             | Current mode only                                                                        |
| Short circuit detection                                                         | Voltage mode only – Output electronically limited to 16 mA or less                       |
| Data format                                                                     | IEEE 754<br>32-bit floating point                                                        |
| Module conversion method                                                        | DAC                                                                                      |
| Update rate                                                                     | 1 channel: 0.2 ms<br>All channels: 0.4 ms                                                |
| Step response time to 63% of full scale per channel                             | Voltage mode: 0.07 ms typical<br>Current mode: 0.4 ms typical                            |
| Backplane to screw response time (63% of full scale)                            | Voltage mode<br>1 channel: 0.5 ms typical<br>All channels: 1 ms typical<br>Current mode: |

**Table 48. Technical Specifications - 5034-0F4, 5034-0F4XT (continued)**

| Attribute                   | 5034-0F4, 5034-0F4XT                                      |
|-----------------------------|-----------------------------------------------------------|
|                             | 1 channel: 0.9 ms typical<br>All channels: 1.4 ms typical |
| Overvoltage protection, max | 32V DC                                                    |

**Table 49. General Specifications - 5034-0F4, 5034-0F4XT**

| Attribute                      | 5034-0F4, 5034-0F4XT                                                                                                                                        |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of outputs              | 4 channels, single-ended<br>Configurable voltage or current mode at channel level                                                                           |
| SA power voltage, nom          | 24V DC                                                                                                                                                      |
| SA power voltage range         | 10...30V DC                                                                                                                                                 |
| SA power current, nom          | 100 mA                                                                                                                                                      |
| SA power current, max          | 0.25 A                                                                                                                                                      |
| SA power current at no load    | 40 mA                                                                                                                                                       |
| SA reverse polarity protection | Yes                                                                                                                                                         |
| Power dissipation, max         | 0.95 W                                                                                                                                                      |
| Thermal dissipation, max       | 3.24 BTU/hr                                                                                                                                                 |
| Isolation voltage              | 250V (continuous), Basic Insulation Type, System to Field<br>No isolation between SA power and output ports<br>No isolation between individual output ports |
| Calibration                    | Factory-calibrated<br>Manual calibration supported, see PointMax Analog I/O Modules User Manual, publication <a href="#">5034-UM003</a>                     |
| RIUP support                   | Yes                                                                                                                                                         |
| Electronic keying              | Electronic keying via programming software                                                                                                                  |
| RTB key positions (slot)       | 2, 5, 10                                                                                                                                                    |
| RTB supported                  | 5034-RTB18, 5034-RTB18S                                                                                                                                     |
| Wiring category <sup>(1)</sup> | 2 - Signal ports<br>2 - Power ports                                                                                                                         |
| Wiring specification           | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a>    |

Table 49. General Specifications - 5034-0F4, 5034-0F4XT (continued)

| Attribute                  | 5034-0F4, 5034-0F4XT                                                                                               |
|----------------------------|--------------------------------------------------------------------------------------------------------------------|
| Indicators                 | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>4 yellow/red I/O status indicators |
| Dimensions (HxWxD), approx | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                    |
| Weight, approx             | 47.0 g (1.66 oz.) - 5034-0F4<br>49.0 g (1.73 oz.) - 5034-0F4XT                                                     |
| Enclosure type             | None (Open-style)                                                                                                  |
| North American temp code   | T4                                                                                                                 |
| UKEX/ATEX temp code        | T4                                                                                                                 |
| IECEx temp code            | T4                                                                                                                 |

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## 5034-0F4IH and 5034-0F4IHXT Analog 4 Output Isolated HART Modules

Figure 48. 5034-0F4IH and 5034-0F4IHXT Wiring Diagram - Current Mode

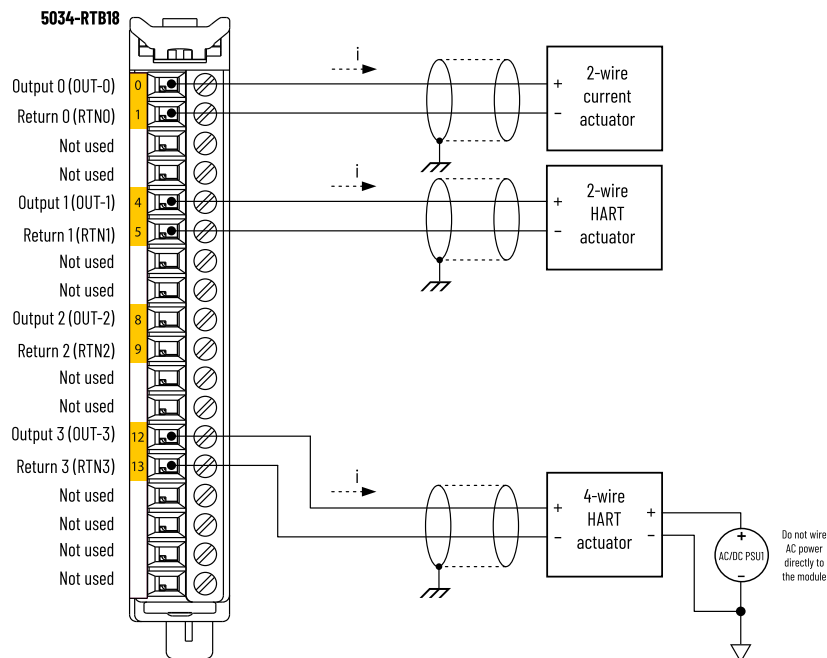


Figure 49. 5034-OF4IH and 5034-OF4IHXT Wiring Diagram - Voltage Mode

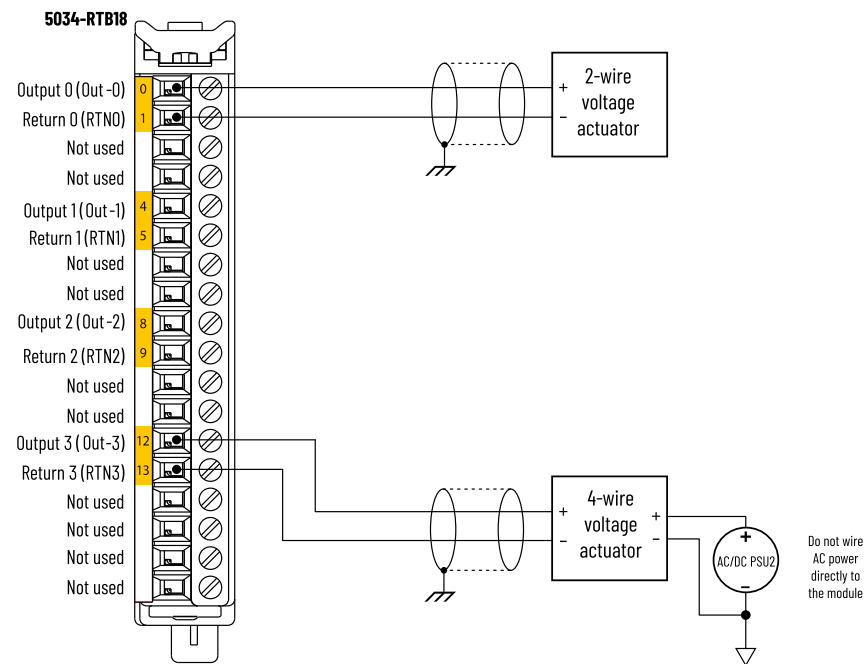


Figure 50. 5034-OF4IH and 5034-OF4IHXT Functional Block Diagram

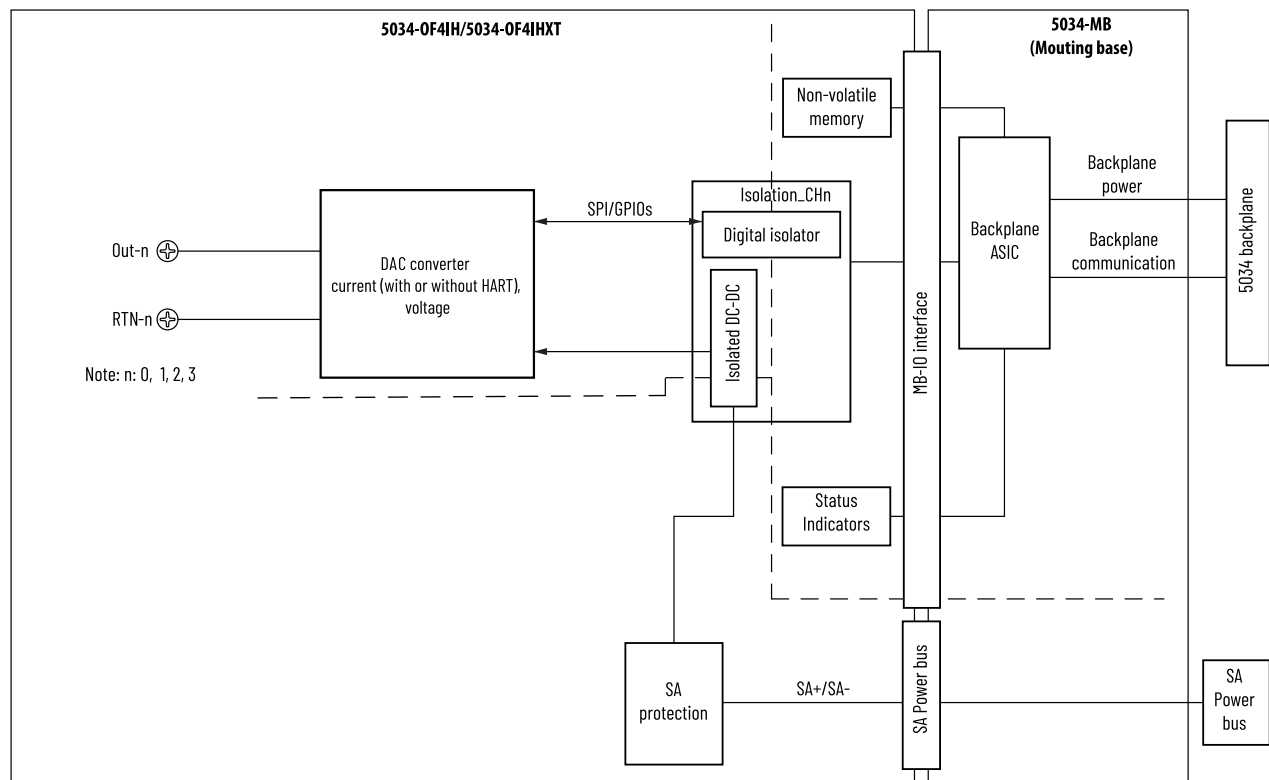


Table 50. Technical Specifications - 5034-OF4IH, 5034-OF4IHXT

| Attribute             | 5034-OF4IH, 5034-OF4IHXT |
|-----------------------|--------------------------|
| Output range, voltage | -10...+10V               |

**Table 50. Technical Specifications - 5034-0F4IH, 5034-0F4IHXT (continued)**

| Attribute                                                                                        | 5034-0F4IH, 5034-0F4IHXT                                                                                                                                                                                                  |
|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                  | 0...10V<br>0...5V                                                                                                                                                                                                         |
| Output range, current                                                                            | 0...20 mA<br>4...20 mA<br>4...20 mA - HART                                                                                                                                                                                |
| Resolution, voltage                                                                              | -10...+10V: 14 bits (1.465 mV/bit)<br>0...10V: 14 bits (732 $\mu$ V/bit)<br>0...5V: 13 bits (732 $\mu$ V/bit)                                                                                                             |
| Resolution, current                                                                              | 0...20 mA range: 14 bits (1.526 $\mu$ A/bit)<br>4...20 mA range: 14 bits (1.526 $\mu$ A/bit)                                                                                                                              |
| Calibrated accuracy at 25 °C (77 °F)<br>HART disabled                                            | Voltage +10...+10V, 0.1% full scale<br>Voltage 0...10V, $\pm$ 0.1% full scale<br>Voltage: 0...5V, $\pm$ 0.2% full scale<br>Current: 0...20 mA, $\pm$ 0.1% full scale<br>Current: 4...20 mA, $\pm$ 0.1% full scale         |
| Calibrated accuracy over full temperature range<br>-25...+60 °C (-13...+140 °F)<br>HART disabled | Voltage: -10...+10V, $\pm$ 0.2% full scale<br>Voltage: 0...10V, $\pm$ 0.2% full scale<br>Voltage: 0...5V, $\pm$ 0.4% full scale<br>Current: 0...20 mA, $\pm$ 0.2% full scale<br>Current: 4...20 mA, $\pm$ 0.2% full scale |
| Drive capability                                                                                 | Voltage: 3000 $\Omega$<br>Current: 750 $\Omega$                                                                                                                                                                           |
| Capacitive load, max<br>Voltage mode                                                             | 1 $\mu$ F                                                                                                                                                                                                                 |
| Inductive load, max<br>Current mode                                                              | 1 mH                                                                                                                                                                                                                      |
| Open wire detection                                                                              | Current mode only                                                                                                                                                                                                         |
| Short circuit detection                                                                          | Voltage mode only                                                                                                                                                                                                         |
| Data format                                                                                      | IEEE 754<br>32-bit floating point                                                                                                                                                                                         |
| Module conversion method                                                                         | DAC                                                                                                                                                                                                                       |

**Table 50. Technical Specifications - 5034-0F4IH, 5034-0F4IHXT (continued)**

| Attribute                                            | 5034-0F4IH, 5034-0F4IHXT                                                                                                                                                                                                                        |
|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| HART update rate                                     | Typically 1 s<br><br>Additional device variables, configured commands, pass through messages, handheld communicators, secondary masters, communication errors, or configuration changes can significantly increase the update time.             |
| Update rate                                          | 1 ms                                                                                                                                                                                                                                            |
| Voltage and current mode                             |                                                                                                                                                                                                                                                 |
| Step response time to 63% of value, typical          | Voltage mode: 90 $\mu$ s typical                                                                                                                                                                                                                |
| HART disabled                                        | Current mode: 50 $\mu$ s typical                                                                                                                                                                                                                |
| Backplane to screw response time (63% of full scale) | Voltage mode:                                                                                                                                                                                                                                   |
| HART disabled                                        | <ul style="list-style-type: none"> <li>1 channel: 0.4 ms typical</li> <li>All channel: 0.4 ms typical</li> </ul> Current mode: <ul style="list-style-type: none"> <li>1 channel: 0.4 ms typical</li> <li>All channel: 0.6 ms typical</li> </ul> |
| Overvoltage protection, max                          | 32V DC                                                                                                                                                                                                                                          |

**Table 51. General Specifications - 5034-0F4IH, 5034-0F4IHXT**

| Attribute                      | 5034-0F4IH, 5034-0F4IHXT                                                                                                                                                                                                                                                                                                |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of outputs              | 4 channels, individually isolated<br><br>Configurable voltage or current mode at channel level                                                                                                                                                                                                                          |
| SA power voltage, nom          | 24V DC                                                                                                                                                                                                                                                                                                                  |
| SA power voltage range         | 10...30V DC                                                                                                                                                                                                                                                                                                             |
| SA power current, nom          | 110 mA                                                                                                                                                                                                                                                                                                                  |
| SA power current, max          | 275 mA                                                                                                                                                                                                                                                                                                                  |
| SA power current at no load    | 27 mA                                                                                                                                                                                                                                                                                                                   |
| SA reverse polarity protection | Yes                                                                                                                                                                                                                                                                                                                     |
| Power dissipation, max         | 1.55 W                                                                                                                                                                                                                                                                                                                  |
| Thermal dissipation, max       | 5.29 BTU/hr                                                                                                                                                                                                                                                                                                             |
| Isolation voltage              | 250V (continuous), Basic Insulation Type, between system and SA power<br><br>250V (continuous), Basic Insulation Type, between SA power and input ports<br><br>250V (continuous), Basic Insulation Type, between individual input ports<br><br>250V (continuous), Basic Insulation Type, between system and input ports |

**Table 51. General Specifications - 5034-OF4IH, 5034-OF4IHXT (continued)**

| Attribute                      | 5034-OF4IH, 5034-OF4IHXT                                                                                                                                 |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Calibration                    | Factory-calibrated<br>Manual calibration supported                                                                                                       |
| RIUP support                   | Yes                                                                                                                                                      |
| Electronic keying              | Electronic keying via programming software                                                                                                               |
| RTB key positions (slot)       | 2, 6, 10                                                                                                                                                 |
| RTB supported                  | 5034-RTB18, 5034-RTB18S                                                                                                                                  |
| Wiring category <sup>(1)</sup> | 2 - Signal ports<br>2 - Power ports                                                                                                                      |
| Wiring specification           | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Indicators                     | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>4 yellow/red I/O status indicators                                       |
| Dimensions (HxWxD), approx     | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                          |
| Weight, approx                 | 51.0 g (1.80 oz.) - 5034-OF4IH<br>55.0 g (1.94 oz.) - 5034-OF4IHXT                                                                                       |
| Enclosure type                 | None (Open-style)                                                                                                                                        |
| North American temp code       | T4                                                                                                                                                       |
| UKEX/ATEX temp code            | T4                                                                                                                                                       |
| IECEx temp code                | T4                                                                                                                                                       |

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## Environmental Specifications and Certifications

The following tables provide the environmental specifications and certifications for the PointMax analog I/O modules.

**Table 52. Environmental Specifications - PointMax Analog I/O Modules**

| Attribute              | 5034-IF8C, 5034-IF8V, 5034-IF4, 5034-IF4IH, 5034-IRT4I,<br>5034-OF4, 5034-OF4IH          | 5034-IF8CXT, 5034-IF8VXT, 5034-IF4XT, 5034-IF4IHXT,<br>5034-IRT4IXT, 5034-OF4XT, 5034-OF4IHXT |
|------------------------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Temperature, operating | IEC 60068-2-1 (Test Ae, Operating Cold),<br>IEC 60068-2-2 (Test Be, Operating Dry Heat), |                                                                                               |

**Table 52. Environmental Specifications - PointMax Analog I/O Modules (continued)**

| Attribute                                                                                                                                                                                                                                                                                                  | 5034-IF8C, 5034-IF8V, 5034-IF4, 5034-IF4IH, 5034-IRT4I, 5034-OF4, 5034-OF4IH                                                                                                                                             | 5034-IF8CXT, 5034-IF8VXT, 5034-IF4XT, 5034-IF4IHXT, 5034-IRT4IXT, 5034-OF4XT, 5034-OF4IHXT                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                            | IEC 60068-2-14 (Test Nb, Operating Thermal Shock):<br>-25 °C ≤ Ta ≤ +60 °C (-13 °F ≤ Ta ≤ +140 °F) for horizontal orientation<br>-25 °C ≤ Ta ≤ +55 °C (-13 °F ≤ Ta ≤ +131 °F) for other orientations                     |                                                                                                                                                                     |
| Temperature, surrounding air, max                                                                                                                                                                                                                                                                          | 60 °C (140 °F)                                                                                                                                                                                                           |                                                                                                                                                                     |
| Temperature, nonoperating                                                                                                                                                                                                                                                                                  | IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold),<br>IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat),<br>IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock):<br>-40...+85 °C (-40...+185 °F) |                                                                                                                                                                     |
| Relative humidity                                                                                                                                                                                                                                                                                          | IEC 60068-2-30 (Test Db, Unpackaged Damp Heat):<br>5...95% noncondensing                                                                                                                                                 |                                                                                                                                                                     |
| Conformal coated                                                                                                                                                                                                                                                                                           | No                                                                                                                                                                                                                       | Yes                                                                                                                                                                 |
| Corrosive Atmosphere<br>ASTM B845-97 Method K<br>Accelerated Test (20-Day Exposure)                                                                                                                                                                                                                        | Severity Level G3 <sup>(1)</sup> per ANSI/ISA 71.04-2013, Airborne Contaminants—Gases                                                                                                                                    | —                                                                                                                                                                   |
| Corrosive Atmosphere <ul style="list-style-type: none"> <li>ASTM B845-97 Method K Accelerated Test (30-Day Exposure)</li> <li>Plus additional Rockwell Automation proprietary accelerated corrosive environment test protocol for specific industries with sources of gaseous sulfur compounds.</li> </ul> | —                                                                                                                                                                                                                        | Severity Level GX <sup>(2)</sup> per ANSI/ISA 71.04-2013, Airborne Contaminants—Gases<br><br>Severity Level CX per IEC 60721-3-3:2019, Chemically Active Substances |
| Vibration                                                                                                                                                                                                                                                                                                  | IEC 60068-2-6 (Test Fc, Operating):<br><br>5 g @ 10...500 Hz                                                                                                                                                             |                                                                                                                                                                     |
| Shock, operating                                                                                                                                                                                                                                                                                           | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br><br>30 g                                                                                                                                                                  |                                                                                                                                                                     |
| Repetitive shock, operating                                                                                                                                                                                                                                                                                | IEC 60068-2-27:<br><br>25 g, 6 ms duration, 1000 shocks in each ± direction in each 3 axis                                                                                                                               |                                                                                                                                                                     |
| Shock, nonoperating                                                                                                                                                                                                                                                                                        | IEC 60068-2-27 (Test Ea, Unpackaged Shock):                                                                                                                                                                              |                                                                                                                                                                     |

**Table 52. Environmental Specifications - PointMax Analog I/O Modules (continued)**

| Attribute                | 5034-IF8C, 5034-IF8V, 5034-IF4, 5034-IF4IH, 5034-IRT4I, 5034-OF4, 5034-OF4IH     | 5034-IF8CXT, 5034-IF8VXT, 5034-IF4XT, 5034-IF4IHXT, 5034-IRT4IXT, 5034-OF4XT, 5034-OF4IHXT |
|--------------------------|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
|                          | 50 g                                                                             |                                                                                            |
| Emissions                | IEC 61000-6-4                                                                    |                                                                                            |
| ESD immunity             | IEC 61000-4-2:<br>6 kV contact discharges<br>8 kV air discharges                 |                                                                                            |
| Radiated RF immunity     | IEC 61000-4-3:<br>10V/m with 1 kHz sine wave 80% AM from 80...6000 MHz           |                                                                                            |
| EFT/B immunity           | IEC 61000-4-4:<br>±3 kV @ 5 kHz on signal ports                                  |                                                                                            |
| Surge transient immunity | IEC 61000-4-5:<br>±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports |                                                                                            |
| Conducted RF immunity    | IEC 61000-4-6:<br>10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz      |                                                                                            |

(1) Up to 86.4 g/(m<sup>2</sup>.yr), mass loss of copper due to corrosion.

(2) Up to 2100 angstroms of film growth per 30 days of copper and/or silver reactivity.

**Table 53. Certifications - PointMax Analog I/O Modules**

| Certification <sup>(1)</sup> | 5034-IF8C, 5034-IF8CXT, 5034-IF8V, 5034-IF8VXT, 5034-IF4, 5034-IF4XT, 5034-IF4IH, 5034-IF4IHXT, 5034-IRT4I, 5034-IRT4IXT, 5034-OF4, 5034-OF4XT, 5034-OF4IH, 5034-OF4IHXT                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| c-UL-us                      | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657.<br><br>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.                                                                                                                                                                                                                                                                                                                                                                          |
| UK and CE                    | UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with:<br>EN 61326-1; Meas./Control/Lab., Industrial Requirements<br>EN 61000-6-2; Industrial Immunity<br>EN 61000-6-4; Industrial Emissions<br>EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)<br>UK Statutory Instrument 2016 No. 1101 and European Union 2014/35/EU LVD, compliant with:<br>EN 61010-2-201; Control Equipment Safety Requirements<br>UK Statutory Instrument 2012 No. 3032 and European Union 2011/65/EU RoHS, compliant with:<br>EN IEC 63000; Technical documentation |
| RCM                          | Australian Radiocommunications Act, compliant with:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

**Table 53. Certifications - PointMax Analog I/O Modules (continued)**

| Certification <sup>(1)</sup> | 5034-IF8C, 5034-IF8CXT, 5034-IF8V, 5034-IF8VXT, 5034-IF4, 5034-IF4XT, 5034-IF4IH, 5034-IF4IHXT, 5034-IRT4I, 5034-IRT4IXT, 5034-OF4, 5034-OF4XT, 5034-OF4IH, 5034-OF4IHXT                                                                                             |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                              | EN 61000-6-4; Industrial Emissions                                                                                                                                                                                                                                   |
| Ex                           | UK Statutory Instrument 2016 No. 1107 and European Union 2014/34/EU ATEX Directive, compliant with:<br>EN IEC 60079-0; General Requirements<br>EN IEC 60079-7; Explosive Atmospheres, Protection "e"<br>II 3 G Ex ec IIC T4 Gc<br>UL 24 ATEX 3272X and UL24UKEX2997X |
| IECEX                        | IECEX System, compliant with:<br>IEC 60079-0; General Requirements<br>IEC 60079-7; Explosive Atmospheres, Protection "e"<br>II 3 G Ex ec IIC T4 Gc<br>IECEX UL 24.0066X                                                                                              |
| KC                           | Korean Registration of Broadcasting and Communications Equipment, compliant with:<br>Article 58-2 of Radio Waves Act, Clause 4                                                                                                                                       |
| Morocco                      | Arrêté ministériel n° 6404-15 du 1 er muharram 1437<br>Arrêté ministériel n° 6404-15 du 29 ramadan 1436                                                                                                                                                              |
| CCC                          | CNCA-C23-01 强制性产品认证实施规则 防爆电气<br>CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products<br>2025122309123247                                                                                                                                          |

(1) When marked. See the Product Certifications website at [rok.auto/certifications](http://rok.auto/certifications) for declarations of conformity, certificates, and other certification details.


# Specialty I/O Module

| I/O Type         | Catalog Number             | Description                           |
|------------------|----------------------------|---------------------------------------|
| IO-Link Master   | 5034-IOL4, 5034-IOL4XT     | IO-Link master 4-channel              |
| Serial Interface | 5034-SERIAL, 5034-SERIALXT | Serial RS-232/RS-422/RS-485 1 channel |
| Encoder          | 5034-ENC, 5034-ENCXT       | HSC/SSI encoder 1 channel             |

Environmental specifications and certifications for PointMax specialty I/O modules are provided in [Environmental Specifications and Certifications on page 130](#).


## 5034-IOL4 and 5034-IOL4XT IO-Link Master 4-channel Module

Figure 51. 5034-IOL4 and 5034-IOL4XT Wiring Diagram – IO-Link Mode

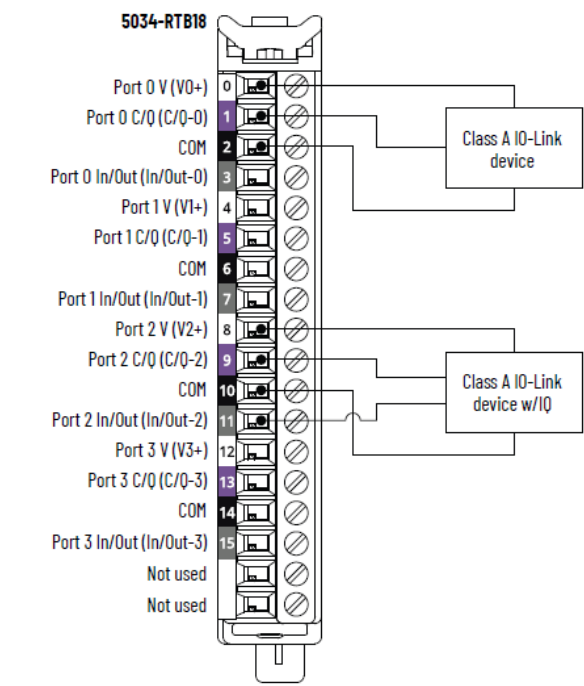


- C/Q = For IO-Link communication, digital input, or digital output
- In/Out (I/Q) = For digital input or digital output

Figure 52. 5034-IOL4 and 5034-IOL4XT Wiring Diagram – DI Mode

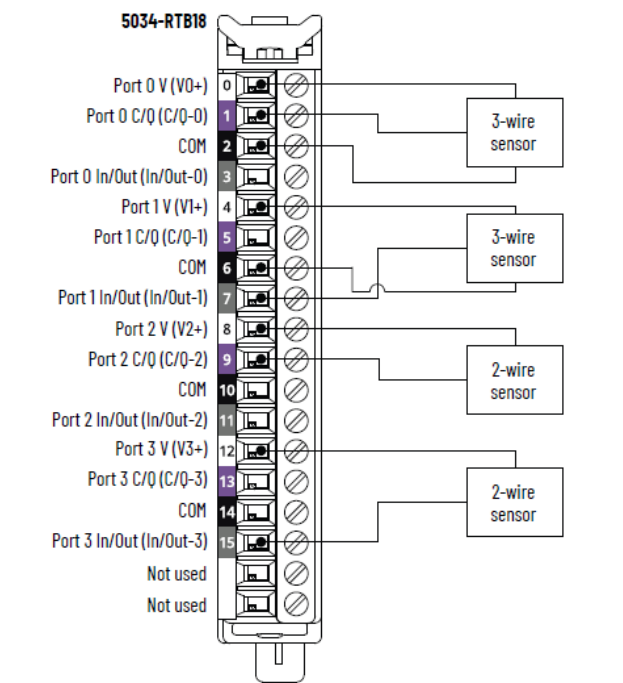

- C/Q = For IO-Link communication, digital input, or digital output
- In/Out (I/Q) = For digital input or digital output

Figure 53. 5034-IOL4 and 5034-IOL4XT Wiring Diagram – DO Mode

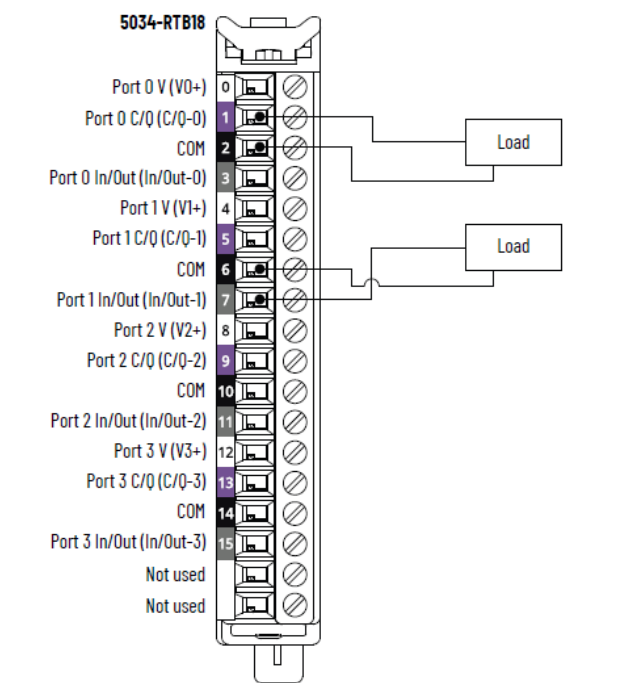

- C/Q = For IO-Link communication, digital input, or digital output
- In/Out (I/Q) = For digital input or digital output

Figure 54. 5034-IOL4 and 5034-IOL4XT Functional Block Diagram

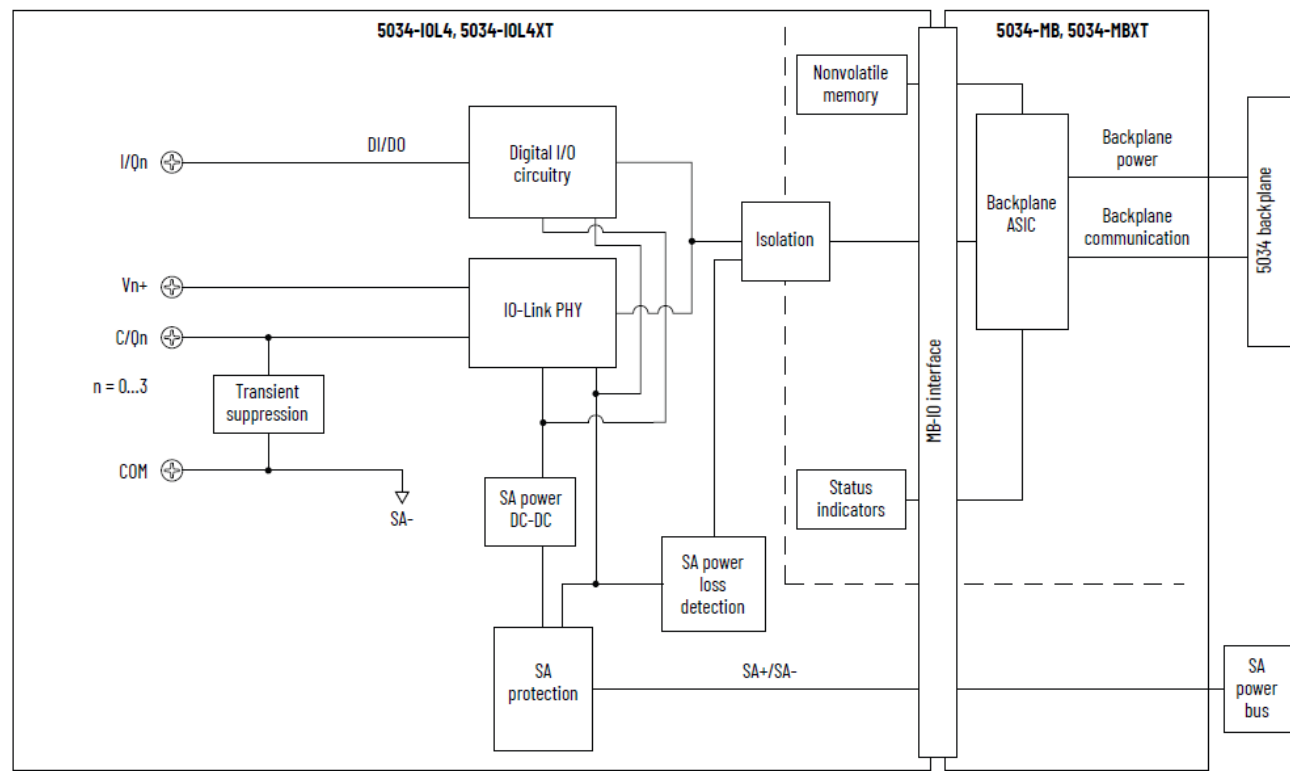


Table 54. Technical Specifications - 5034-IOL4, 5034-IOL4XT - IO-Link Ports

| Attribute                        | 5034-IOL4, 5034-IOL4XT          |
|----------------------------------|---------------------------------|
| Number of ports                  | 4 Class A ports                 |
| Communication speed              | 4.8 Kbps, 38.4 Kbps, 230.4 Kbps |
| Voltage rating                   | 20...30V DC                     |
| V+ current rating, per port, max | 0.5 A                           |
| IO-Link device cable length, max | 20 m (66 ft)                    |
| IO-Link Protocol version         | Versions 1.0 and 1.1            |

Table 55. Technical Specifications - 5034-IOL4, 5034-IOL4XT - Digital Inputs

| Attribute                                    | 5034-IOL4, 5034-IOL4XT          |
|----------------------------------------------|---------------------------------|
| On-state voltage range<br>Channel 0, 2, 4, 6 | 11...30V DC - C/Q (in SIO mode) |
| On-state voltage range<br>Channel 1, 3, 5, 7 | 10...30V DC - I/Q               |
| On-state current, min                        | 2 mA - C/Q (in SIO mode)        |

**Table 55. Technical Specifications - 5034-IOL4, 5034-IOL4XT - Digital Inputs (continued)**

| Attribute                                                                                  | 5034-IOL4, 5034-IOL4XT                                                        |
|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Channel 0, 2, 4, 6                                                                         |                                                                               |
| On-state current, min<br>Channel 1, 3, 5, 7                                                | 2 mA - I/Q                                                                    |
| On-state current, nom<br>Channel 0, 2, 4, 6                                                | 2.5 mA - C/Q (in SIO mode)                                                    |
| On-state current, nom<br>Channel 1, 3, 5, 7                                                | 2.3 mA - I/Q                                                                  |
| On-state current, max<br>Channel 0, 2, 4, 6                                                | 6.6 mA - C/Q (in SIO mode)                                                    |
| On-state current, max<br>Channel 1, 3, 5, 7                                                | 5 mA - I/Q                                                                    |
| Off-state voltage, max<br>Channel 0, 2, 4, 6                                               | 5V DC - C/Q (in SIO mode)                                                     |
| Off-state voltage, max<br>Channel 1, 3, 5, 7                                               | 5V DC - I/Q                                                                   |
| Off-state current, max<br>Channel 0, 2, 4, 6                                               | 1.5 mA - C/Q (in SIO mode)                                                    |
| Off-state current, max<br>Channel 1, 3, 5, 7                                               | 1.5 mA - I/Q                                                                  |
| Input impedance, min                                                                       | 1.6 k $\Omega$ @ 11V DC - C/Q (in SIO mode)<br>2 k $\Omega$ @ 10V DC - I/Q    |
| Input impedance, nom                                                                       | 9.6 k $\Omega$ @ 24V DC - C/Q (in SIO mode)<br>10.4 k $\Omega$ @ 24V DC - I/Q |
| Input impedance, max                                                                       | 15 k $\Omega$ @ 30V DC - C/Q (in SIO mode)<br>15 k $\Omega$ @ 30V DC - I/Q    |
| Input delay time (screw to backplane), max<br>Channel 0, 2, 4, 6<br>Off-to-On<br>On-to-Off | 900 $\mu$ s                                                                   |
| Input delay time (screw to backplane), max<br>Channel 1, 3, 5, 7                           | 60 $\mu$ s                                                                    |

**Table 55. Technical Specifications - 5034-IOL4, 5034-IOL4XT - Digital Inputs (continued)**

| Attribute                                                             | 5034-IOL4, 5034-IOL4XT                                                                                                                                           |
|-----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Off-to-On<br>On-to-Off                                                |                                                                                                                                                                  |
| Input min pulse width<br>Channel 0, 2, 4, 6<br>Off-to-On<br>On-to-Off | 1 ms                                                                                                                                                             |
| Input min pulse width<br>Channel 1, 3, 5, 7<br>Off-to-On<br>On-to-Off | 0.125 ms                                                                                                                                                         |
| Input filter time<br>Channel 0, 2, 4, 6<br>Off-to-On<br>On-to-Off     | 0 $\mu$ s, 2 ms (Default), 5 ms, 10 ms, 20 ms, 50 ms                                                                                                             |
| Input filter time<br>Channel 1, 3, 5, 7<br>Off-to-On<br>On-to-Off     | 0 $\mu$ s, 100 $\mu$ s, 200 $\mu$ s, 500 $\mu$ s (Default), 1 ms, 2 ms, 5 ms, 10 ms, 20 ms, 50 ms<br>The 0 $\mu$ s setting is embedded with a 10 $\mu$ s filter. |
| Simple counters, counter frequency<br>Channel 0, 2, 4, 6              | 0... $f_{\max}$ = 500 Hz                                                                                                                                         |
| Simple counters, counter frequency<br>Channel 1, 3, 5, 7              | 0... $f_{\max}$ = 4000 Hz                                                                                                                                        |
| Timestamp of inputs (sequence of events)<br>Channel 0, 2, 4, 6        | Yes, $\pm 500$ $\mu$ s accuracy                                                                                                                                  |
| Timestamp of inputs (sequence of events)<br>Channel 1, 3, 5, 7        | Yes, $\pm 10$ $\mu$ s accuracy                                                                                                                                   |
| Events                                                                | Yes                                                                                                                                                              |
| Pattern matching                                                      | Yes                                                                                                                                                              |

**Table 56. Technical Specifications - 5034-IOL4, 5034-IOL4XT - Digital Outputs**

| Attribute              | 5034-IOL4, 5034-IOL4XT          |
|------------------------|---------------------------------|
| On-state voltage range | 20...30V DC - C/Q (in SIO mode) |

**Table 56. Technical Specifications - 5034-IOL4, 5034-IOL4XT - Digital Outputs (continued)**

| Attribute                                                                                                                   | 5034-IOL4, 5034-IOL4XT              |
|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Channel 0, 2, 4, 6                                                                                                          |                                     |
| On-state voltage range<br>Channel 1, 3, 5, 7                                                                                | 20...30V DC - I/Q                   |
| On-state voltage drop, max<br>Channel 0, 2, 4, 6                                                                            | 0.6V DC - C/Q (in SIO mode)         |
| On-state voltage drop, max<br>Channel 1, 3, 5, 7                                                                            | 0.3V DC - I/Q                       |
| On-state current per channel, max<br>Channel 0, 2, 4, 6                                                                     | 250 mA - C/Q (in SIO mode)          |
| On-state current per channel, max<br>Channel 1, 3, 5, 7                                                                     | 500 mA - I/Q                        |
| Off-state leakage current per point, max<br>Off-state open wire detection disabled<br>Channel 1, 3, 5, 7 only               | 0.1 mA                              |
| Off-state leakage current per point, max <sup>(1)</sup><br>Off-state open wire detection enabled<br>Channel 1, 3, 5, 7 only | 0.5 mA                              |
| Surge current per output, max<br>Channel 1, 3, 5, 7                                                                         | 1 A for 10 ms, repeatable every 3 s |
| Output current rating per module, max                                                                                       | 3 A                                 |
| Output delay time (backplane to screw), max<br>Channel 0, 2, 4, 6<br>Off-to-On<br>On-to-Off                                 | 1 ms                                |
| Output delay time (backplane to screw), max<br>Channel 1, 3, 5, 7<br>Off-to-On<br>On-to-Off                                 | 0.15 ms                             |
| Open load detection diagnostics<br>Channel 1, 3, 5, 7 only                                                                  | Yes, configurable (Default is off)  |
| Output short circuit/overload detection                                                                                     | Yes                                 |

**Table 56. Technical Specifications - 5034-IOL4, 5034-IOL4XT - Digital Outputs (continued)**

| Attribute                               | 5034-IOL4, 5034-IOL4XT |
|-----------------------------------------|------------------------|
| Channel 0, 2, 4, 6                      |                        |
| Output short circuit/overload detection | Yes                    |
| Channel 1, 3, 5, 7                      |                        |

(1) Recommended Loading Resistor - To limit the effects of leakage current through solid-state outputs, you can connect a loading resistor in parallel with your load. For 24V DC operation, use a 5.6 kΩ, 0.5 W resistor for transistor operation.

**Table 57. General Specifications - 5034-IOL4, 5034-IOL4XT**

| Attribute                               | 5034-IOL4, 5034-IOL4XT                                                                                                                                   |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of inputs/outputs                | 8 channels, configurable, inclusive of 4x C/Q channels configured to SIO mode, sinking input, sourcing output                                            |
| SA power voltage, nom                   | 24V DC                                                                                                                                                   |
| SA power voltage range                  | 20...30V DC                                                                                                                                              |
| SA power current, nom                   | 3.2 A                                                                                                                                                    |
| SA power current, max                   | 3.3 A                                                                                                                                                    |
| SA power current at no load             | 14 mA                                                                                                                                                    |
| SA reverse polarity protection          | Yes                                                                                                                                                      |
| Power dissipation, max <sup>(1)</sup>   | 1.04 W                                                                                                                                                   |
| Thermal dissipation, max <sup>(1)</sup> | 3.55 BTU/hr                                                                                                                                              |
| Isolation voltage                       | 250V (continuous), Basic Insulation Type, System to Field<br>No isolation between SA power and channels<br>No isolation between individual channels      |
| RIUP support                            | Yes                                                                                                                                                      |
| CIP Sync                                | Yes, slave only ordinary clock                                                                                                                           |
| Electronic keying                       | Electronic keying via programming software                                                                                                               |
| RTB key positions (slot)                | 3, 6, 12                                                                                                                                                 |
| RTB supported                           | 5034-RTB18, 5034-RTB18S                                                                                                                                  |
| Wiring category <sup>(2)</sup>          | 2 - Signal ports<br>2 - Power ports                                                                                                                      |
| Wiring specification                    | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |

Table 57. General Specifications - 5034-IOL4, 5034-IOL4XT (continued)

| Attribute                  | 5034-IOL4, 5034-IOL4XT                                                                                             |
|----------------------------|--------------------------------------------------------------------------------------------------------------------|
| Indicators                 | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>8 yellow/red I/O status indicators |
| Dimensions (HxWxD), approx | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                    |
| Weight, approx             | 48.0 g (1.69 oz.) - 5034-IOL4<br>51.0 g (1.80 oz.) - 5034-IOL4XT                                                   |
| Enclosure type             | None (Open-style)                                                                                                  |
| North American temp code   | T4                                                                                                                 |
| UKEX/ATEX temp code        | T4                                                                                                                 |
| IECEx temp code            | T4                                                                                                                 |

(1) Value is measured at 60 °C (140 °F). Power dissipation varies with temperature.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

# 5034-SERIAL and 5034-SERIALXT Serial RS-232/RS-422/RS-485 1 Channel Module

Figure 55. 5034-SERIAL and 5034-SERIALXT Wiring Diagram – RS-232 Mode DTE Device

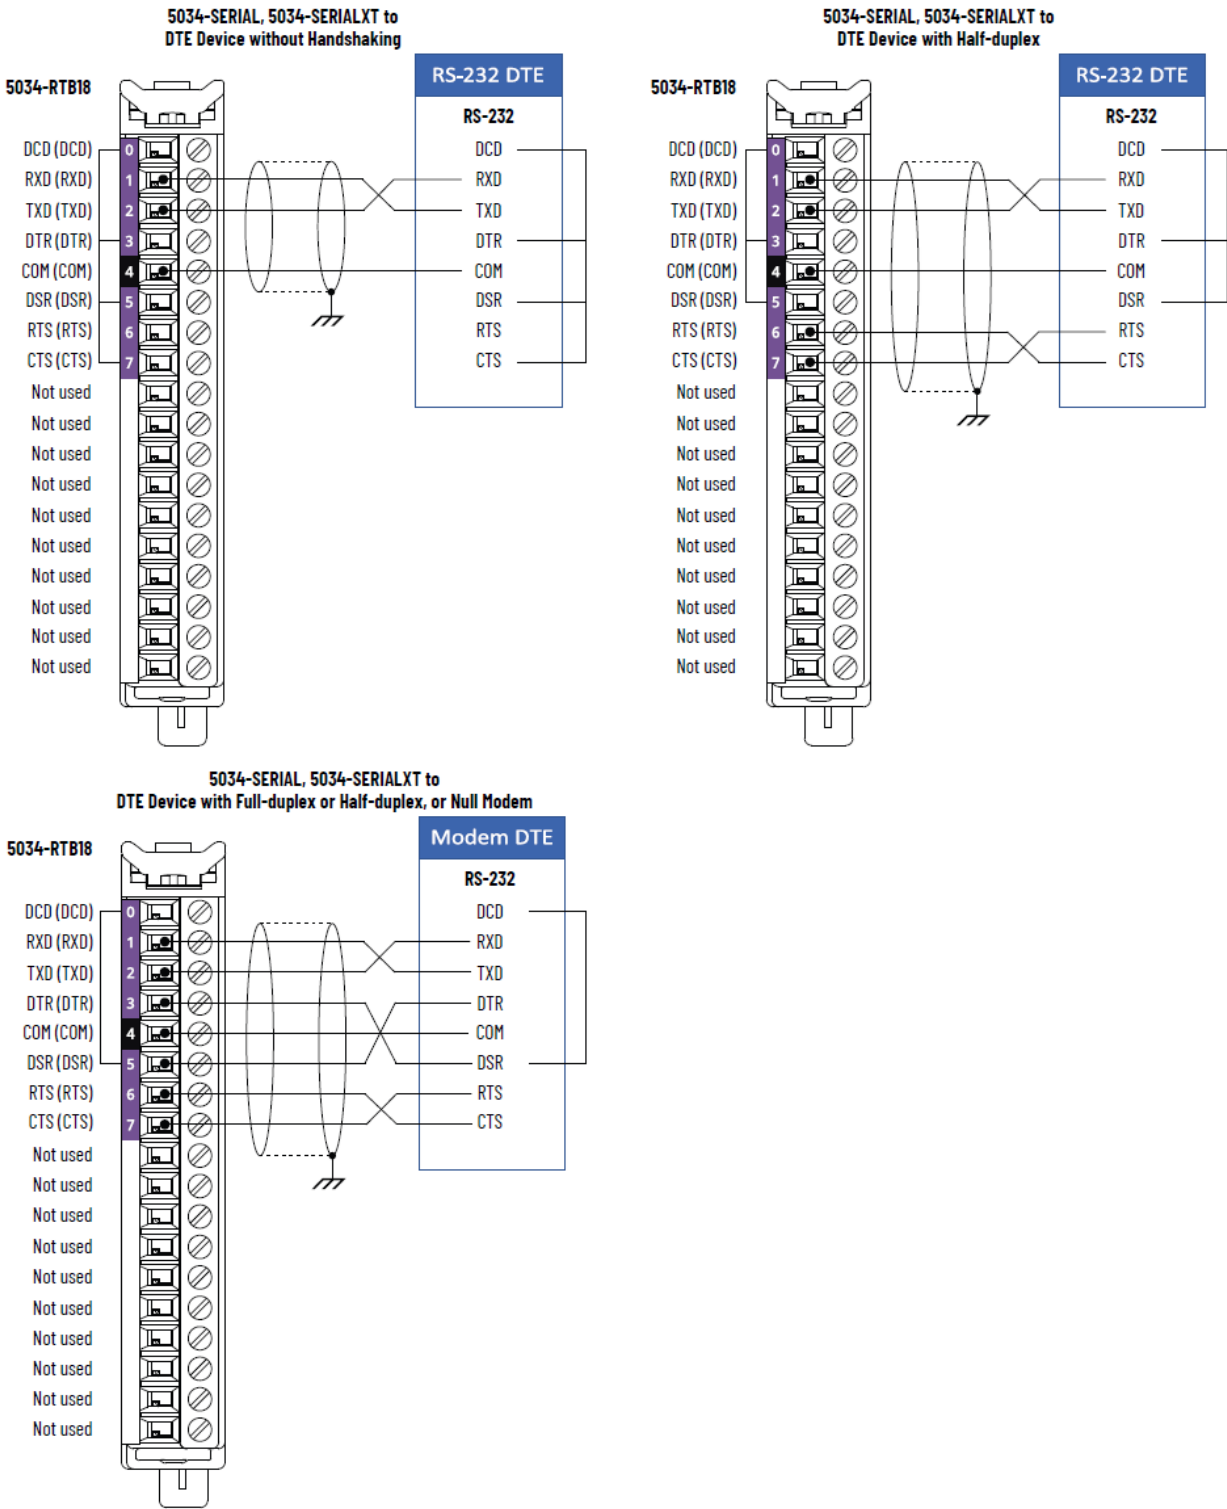


Figure 56. 5034-SERIAL and 5034-SERIALXT Wiring Diagram – RS-232 Mode DCE Device


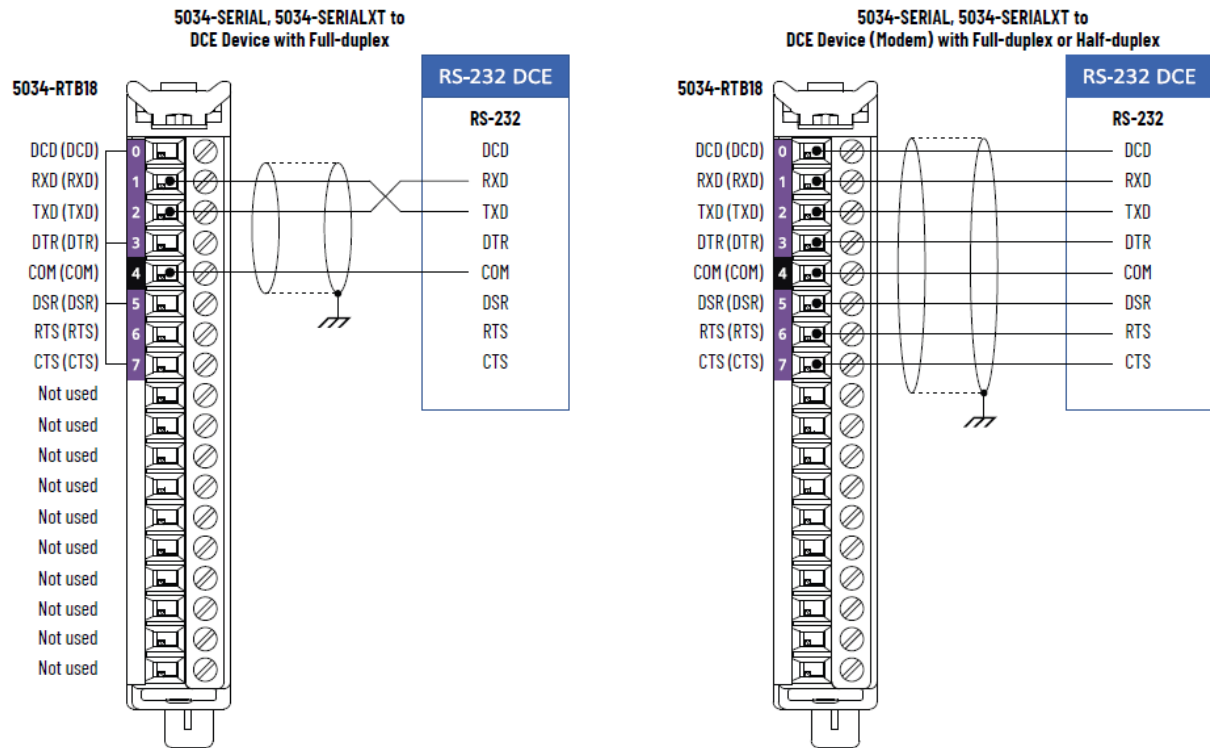


Figure 57. 5034-SERIAL and 5034-SERIALXT Wiring Diagram – RS-485 Mode



- Place the termination resistor between TRXD+ and TRXD- to implement this wiring.
- The recommended cable to use is Belden 8104.

5034-SERIAL 5034-SERIAL Y to

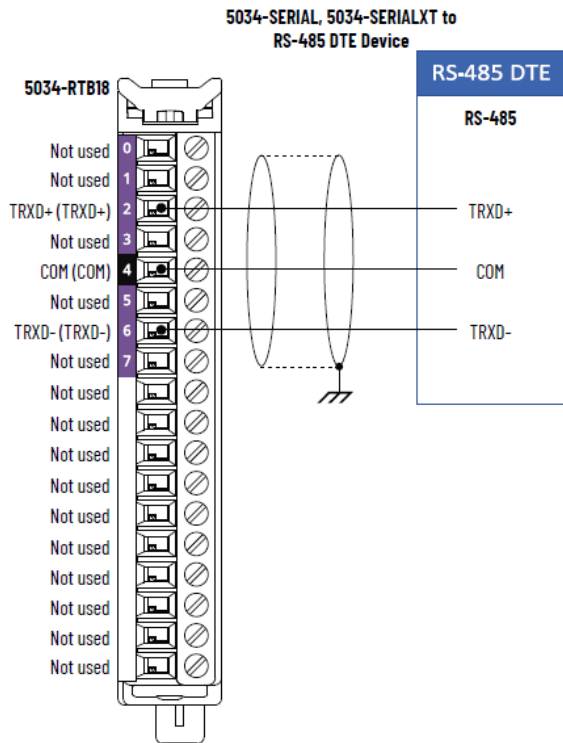

- Place the termination resistor between RXD+ and RXD- to implement this wiring.
- The recommended cable to use is Belden 8104.

Figure 59. 5034-SERIAL and 5034-SERIALXT Functional Block Diagram

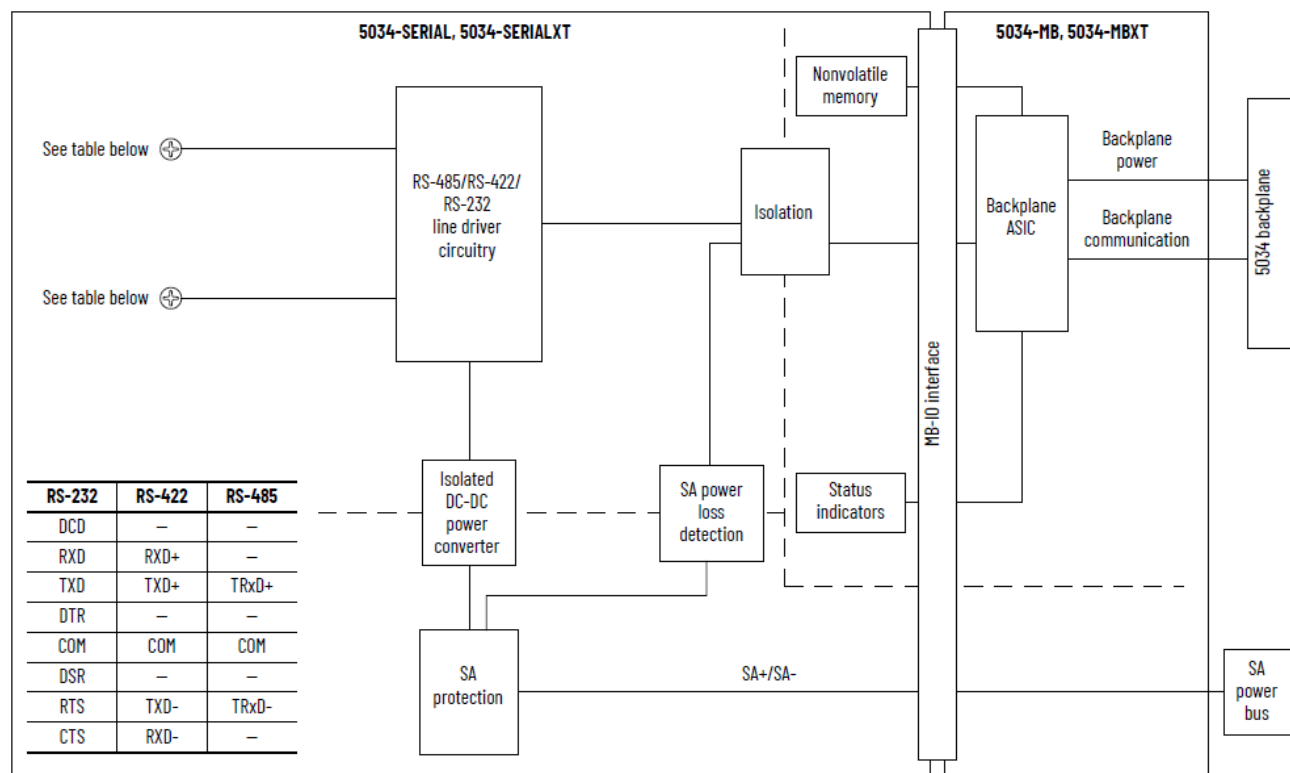


Table 58. Technical Specifications - 5034-SERIAL, 5034-SERIALXT

| Attribute                          | 5034-SERIAL, 5034-SERIALXT                                                                                                                               |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating modes                    | Generic ASCII<br>Modbus RTU<br>Modbus ASCII                                                                                                              |
| Serial input signal voltage range  | +3...+25V DC regarding signal ground (SG) 0, Asserted, ON, Space, Active<br>-3...-25V DC regarding signal ground (SG) 1, Deasserted, OFF, Mark, Inactive |
| Handshaking                        | RTS/CTS hardware handshake always enabled<br>RTS/CTS user-controllable                                                                                   |
| Supported communication rate (bps) | 1200, 2400, 4800, 9600, 19200 (Default), 38400, 57600, 115200                                                                                            |

Table 59. General Specifications - 5034-SERIAL, 5034-SERIALXT

| Attribute             | 5034-SERIAL, 5034-SERIALXT                            |
|-----------------------|-------------------------------------------------------|
| Number of inputs      | One full-duplex (RS-232, RS-422)/half-duplex (RS-485) |
| Voltage category      | 24V DC source                                         |
| SA power voltage, nom | 24V DC                                                |

**Table 59. General Specifications - 5034-SERIAL, 5034-SERIALXT (continued)**

| Attribute                               | 5034-SERIAL, 5034-SERIALXT                                                                                                                                                                                               |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SA power voltage range                  | 10...30V DC                                                                                                                                                                                                              |
| SA power current, nom                   | 20 mA                                                                                                                                                                                                                    |
| SA power current, max                   | 30 mA                                                                                                                                                                                                                    |
| SA power current at no load             | 15 mA                                                                                                                                                                                                                    |
| SA reverse polarity protection          | Yes                                                                                                                                                                                                                      |
| Power dissipation, max <sup>(1)</sup>   | 0.55 W                                                                                                                                                                                                                   |
| Thermal dissipation, max <sup>(1)</sup> | 1.88 BTU/hr                                                                                                                                                                                                              |
| Isolation voltage                       | 250V (continuous), Basic Insulation Type, System to SA power<br>250V (continuous), Basic Insulation Type, SA power to Communication channel<br>250V (continuous), Basic Insulation Type, System to Communication channel |
| RIUP support                            | Yes                                                                                                                                                                                                                      |
| Electronic keying                       | Electronic keying via programming software                                                                                                                                                                               |
| RTB key positions (slot)                | 3, 5, 11                                                                                                                                                                                                                 |
| RTB supported                           | 5034-RTB18, 5034-RTB18S                                                                                                                                                                                                  |
| Wiring category <sup>(2)</sup>          | 2 - Signal ports<br>2 - Power ports                                                                                                                                                                                      |
| Wiring specification                    | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a>                                                                 |
| Indicators                              | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>2 yellow/red I/O status indicators                                                                                                       |
| Dimensions (HxWxD), approx              | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                                                                                          |
| Weight, approx                          | 45.0 g (1.59 oz.) - 5034-SERIAL<br>47.0 g (1.66 oz.) - 5034-SERIALXT                                                                                                                                                     |
| Enclosure type                          | None (Open-style)                                                                                                                                                                                                        |
| North American temp code                | T4                                                                                                                                                                                                                       |
| UKEX/ATEX temp code                     | T4                                                                                                                                                                                                                       |
| IECEx temp code                         | T4                                                                                                                                                                                                                       |


Table 59. General Specifications - 5034-SERIAL, 5034-SERIALXT (continued)

| Attribute | 5034-SERIAL, 5034-SERIALXT |
|-----------|----------------------------|
|-----------|----------------------------|

- (1) Value is measured at 60 °C (140 °F). Power dissipation varies with temperature.
- (2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## 5034-ENC and 5034-ENCXT HSC/SSI Encoder 1 Channel Module

Figure 60. 5034-ENC and 5034-ENCXT Wiring Diagram – HSC/Incremental Encoder

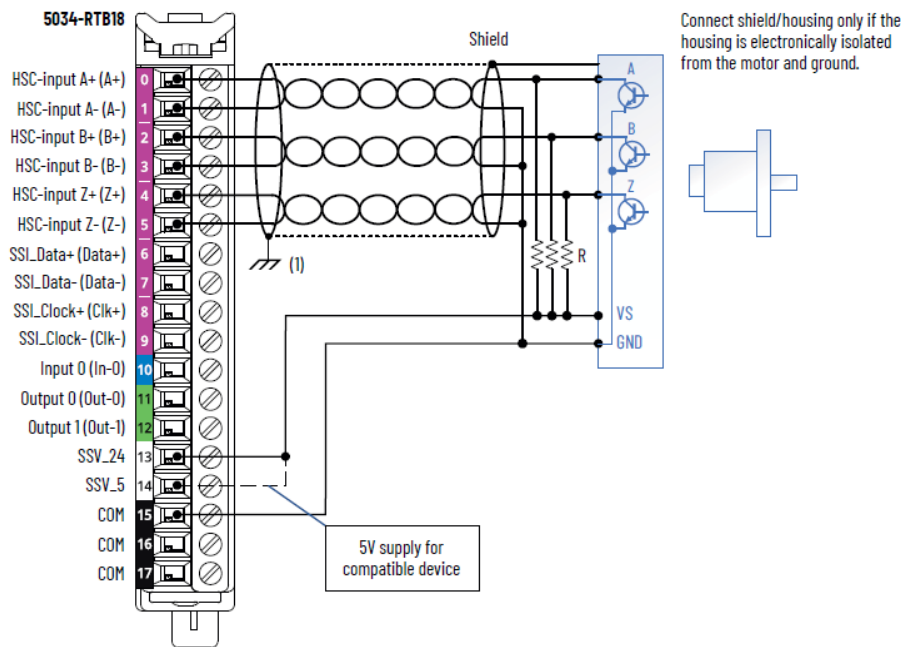

**IMPORTANT:** When using the module in HSC mode, do not connect wiring to the SSI terminals (Data, Clk).

**IMPORTANT:** External resistors, as indicated by the “R” in the diagram, are required if they are not internal to the encoder. The pull-up resistor (R) value depends on the power supply value.

To calculate the maximum resistor value, use the following formula:

$R = VDC - V_{min}/I_{min}$


Where:

- R = Maximum pull-up resistor value
- VDC = Power supply voltage (either SSV\_24 or SSV\_5)
- V<sub>min</sub> = 3.0V DC
- I<sub>min</sub> = 2.5 mA

| Supply By | Power Supply Voltage (V DC) | Pull-up Resistor Value (R), Max (Ω) <sup>(1)</sup> |
|-----------|-----------------------------|----------------------------------------------------|
| SSV_24    | 10                          | 2800                                               |
|           | 24                          | 8400                                               |
|           | 30                          | 10,800                                             |
| SSV_5     | 5                           | 800                                                |

(1) Resistance values can change, depending on your application. The minimum resistor (R) value depends on the current-sinking capability of the encoder.

Figure 61. 5034-ENC and 5034-ENCXT Wiring Diagram – SSI Encoder

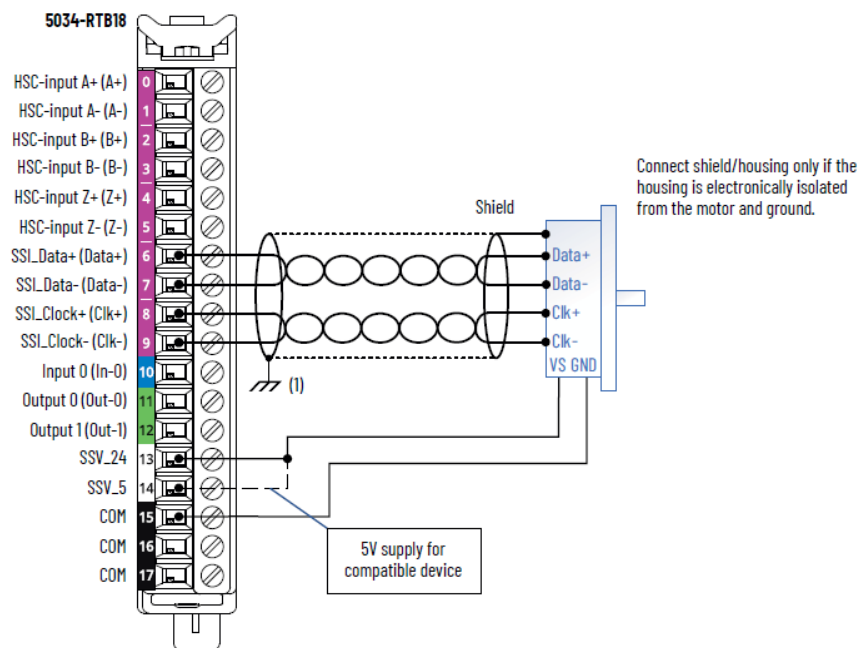

(1) If the module is installed on a DIN rail that is grounded, you can connect the cable shield to the terminal labeled Chassis instead of Earth Ground.

**IMPORTANT:** When using the module in SSI mode, do not connect wiring to the HSC terminals (A, B, Z).

Figure 62. 5034-ENC and 5034-ENCXT Wiring Diagram - Input/Output

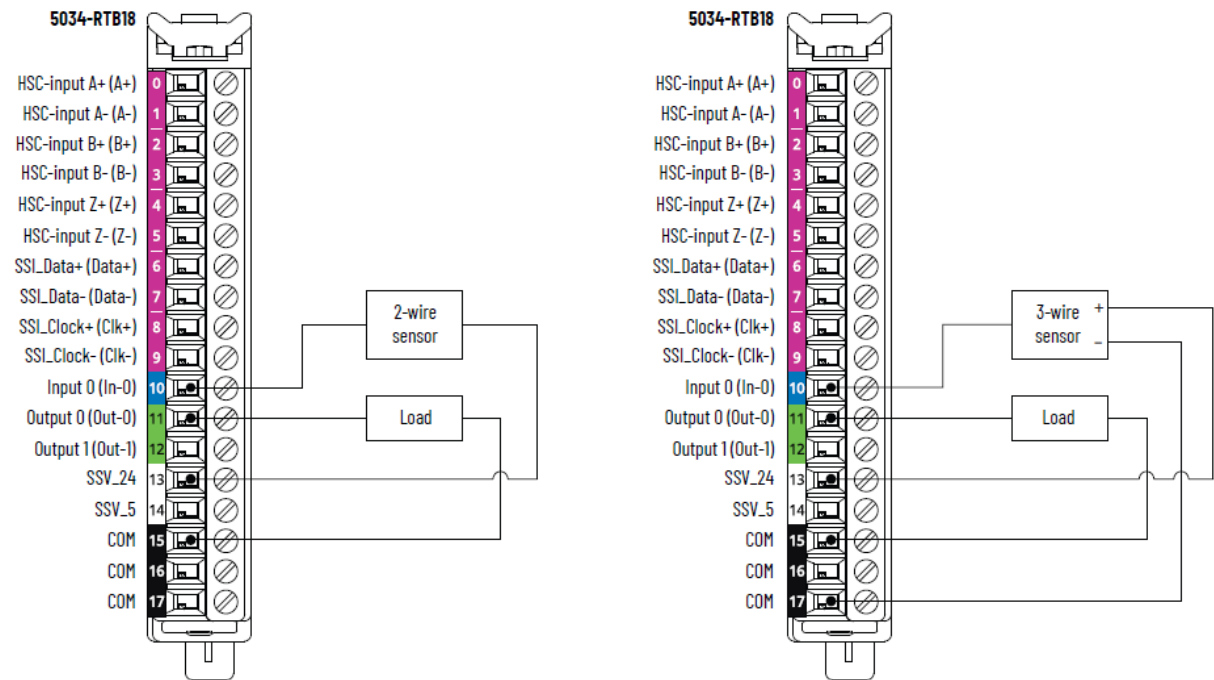


Figure 63. 5034-ENC and 5034-ENCXT Functional Block Diagram

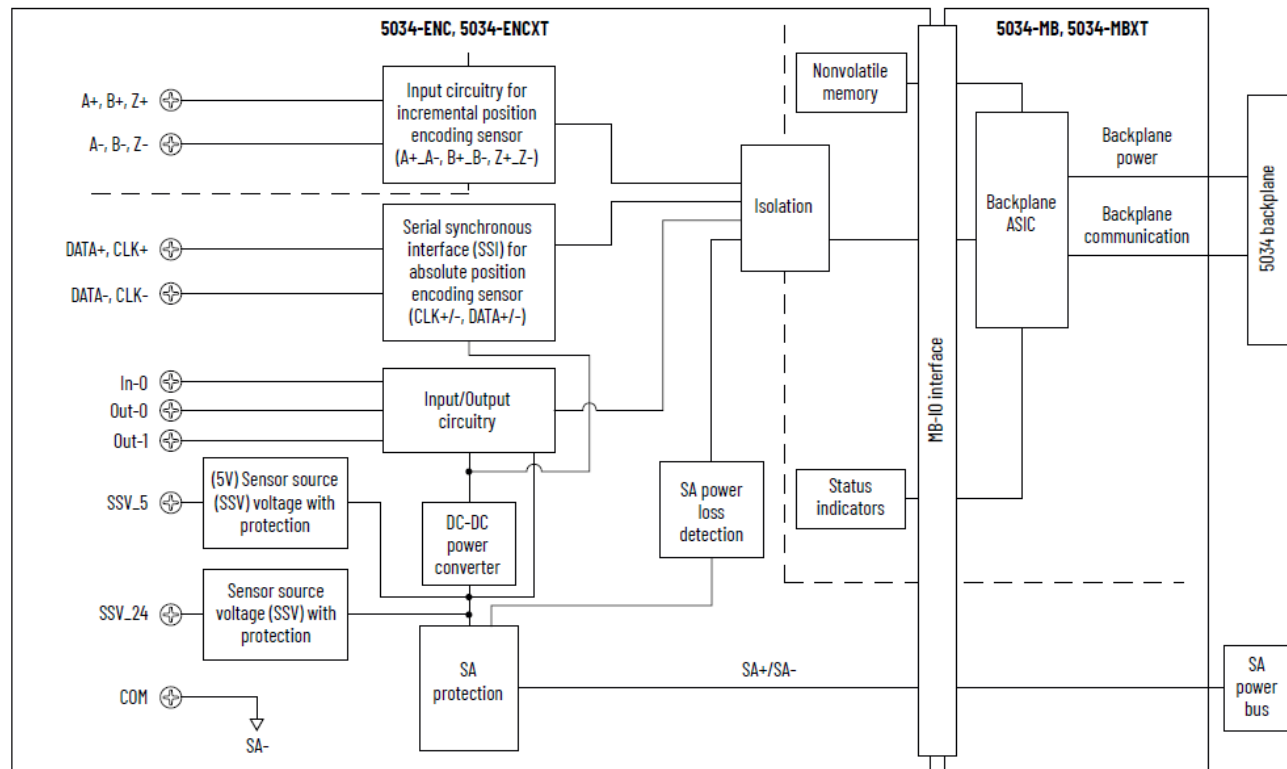


Table 60. Technical Specifications - 5034-ENC, 5034-ENCXT - HSC

| Attribute              | 5034-ENC, 5034-ENCXT |
|------------------------|----------------------|
| On-state voltage range | 3...32V DC           |

**Table 60. Technical Specifications - 5034-ENC, 5034-ENCXT - HSC (continued)**

| Attribute                                        | 5034-ENC, 5034-ENCXT                                                                                                                                                                                                                    |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Channel A, B, Z                                  |                                                                                                                                                                                                                                         |
| On-state current, min<br>Channel A, B, Z         | 2.5 mA @ 3V DC                                                                                                                                                                                                                          |
| On-state current, nom<br>Channel A, B, Z         | 4.0 mA @ 24V DC                                                                                                                                                                                                                         |
| On-state current, max<br>Channel A, B, Z         | 8.0 mA @ 32V DC                                                                                                                                                                                                                         |
| Off-state voltage, max<br>Channel A, B, Z        | 1.5V DC                                                                                                                                                                                                                                 |
| Off-state current, max<br>Channel A, B, Z        | 0.5 mA                                                                                                                                                                                                                                  |
| Input pulse width, min<br>Off-to-On<br>On-to-Off | 125 ns                                                                                                                                                                                                                                  |
| Input filter time<br>Off-to-On<br>On-to-Off      | 0 ns, 100 ns, 200 ns, 500 ns, 1 $\mu$ s, 2 $\mu$ s, 5 $\mu$ s (Default for Input A and Input B), 10 $\mu$ s, 20 $\mu$ s, 50 $\mu$ s, 100 $\mu$ s, 200 $\mu$ s, 500 $\mu$ s, 1 ms (Default for Input Z), 2 ms, 5 ms, 10 ms, 20 ms, 50 ms |
| Phase separation, min                            | 100 ns                                                                                                                                                                                                                                  |
| Input pulse frequency, max                       | 1.0 MHz                                                                                                                                                                                                                                 |
| Input pulse frequency, min                       | 0.1 Hz                                                                                                                                                                                                                                  |

**Table 61. Technical Specifications - 5034-ENC, 5034-ENCXT - SSI**

| Attribute                   | 5034-ENC, 5034-ENCXT                                                                                                                                                                                                  |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SSI mode encoder type       | Any absolute encoder supporting standard SSI protocol including linear, rotary, and optical distance measuring devices in MSB-aligned data format<br><br>The physical interface for clock and data signals is RS-422. |
| SSI data rate supported     | 125 kHz (Default), 250 kHz, 500 kHz, 1 MHz, 2 MHz                                                                                                                                                                     |
| SSI bits per word supported | 2...31 bits<br><br>13 bits (Default)                                                                                                                                                                                  |
| SSI word delay time         | 16...65,535 $\mu$ s                                                                                                                                                                                                   |

**Table 61. Technical Specifications - 5034-ENC, 5034-ENCXT - SSI (continued)**

| Attribute               | 5034-ENC, 5034-ENCXT                                                                                                                                                                                                                        |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                         | 64 $\mu$ s (Default)                                                                                                                                                                                                                        |
| SSI code type supported | Binary, Gray (Gray to binary conversion supported)                                                                                                                                                                                          |
| SSI direction           | Increasing or decreasing SSI count indication                                                                                                                                                                                               |
| SSI data comparator     | Up to four window comparators                                                                                                                                                                                                               |
| SSI data latching       | Supported using In-0 input                                                                                                                                                                                                                  |
| SSI cable type          | UL CM/AWM 2464/CSA Type CMG FT4 or similar cable utilizing shielded twisted pairs for D+/- and C+/- connections. See sensor manufacturer for actual cable required for the SSI sensor under use. In-0 input can be separate from SSI cable. |
| SSI cable length, max   | Depending on the desired SSI data rate:<br>125 kHz - 320 m (1050 ft)<br>250 kHz - 160 m (525 ft)<br>500 kHz - 60 m (195 ft)<br>1 MHz - 20 m (65 ft)<br>2 MHz - 8 m (25 ft)                                                                  |

**Table 62. Technical Specifications - 5034-ENC, 5034-ENCXT - Digital Input**

| Attribute                                  | 5034-ENC, 5034-ENCXT    |
|--------------------------------------------|-------------------------|
| On-state voltage range                     | 10...30V DC             |
| On-state current, min                      | 2.0 mA                  |
| On-state current, nom                      | 4.5 mA                  |
| On-state current, max                      | 5.0 mA                  |
| Off-state voltage, max                     | 5V DC                   |
| Off-state current, max                     | 1.5 mA                  |
| Input impedance, min                       | 2 k $\Omega$ @ 10V DC   |
| Input impedance, nom                       | 5.3 k $\Omega$ @ 24V DC |
| Input impedance, max                       | 15 k $\Omega$ @ 30V DC  |
| Input delay time (screw to backplane), max | 150 $\mu$ s             |
| Off-to-On                                  |                         |
| On-to-Off                                  |                         |
| Input pulse width, min                     | 10 $\mu$ s              |

**Table 62. Technical Specifications - 5034-ENC, 5034-ENCXT – Digital Input (continued)**

| Attribute                                   | 5034-ENC, 5034-ENCXT                                                                                                             |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Off-to-On<br>On-to-Off                      |                                                                                                                                  |
| Input filter time<br>Off-to-On<br>On-to-Off | 0 ns, 10 $\mu$ s, 20 $\mu$ s, 50 $\mu$ s, 100 $\mu$ s, 200 $\mu$ s, 500 $\mu$ s, 1 ms (Default), 2 ms, 5 ms, 10 ms, 20 ms, 50 ms |
| Timestamp of inputs (sequence of events)    | Not supported                                                                                                                    |

**Table 63. Technical Specifications - 5034-ENC, 5034-ENCXT – Digital Output**

| Attribute                                                             | 5034-ENC, 5034-ENCXT                                                                   |
|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| On-state voltage range                                                | 10...30V DC                                                                            |
| On-state voltage drop, max                                            | 0.25V DC                                                                               |
| On-state current per point, min                                       | 1.0 mA                                                                                 |
| Off-state voltage, max                                                | 5V DC with 1 mA min load                                                               |
| Off-state leakage current per point, max <sup>(1)</sup>               | 0.5 mA                                                                                 |
| Output current rating per channel, max                                | 0.5 A                                                                                  |
| Output current rating per module, max                                 | 1 A                                                                                    |
| Surge current per point, max                                          | 1.2 A for 10 ms, repeatable every 3 s                                                  |
| Inductive load allowed, max                                           | 1.2 H                                                                                  |
| Output clamping voltage for inductive load when turn off              | (SA voltage + VCL)...0<br>VCL value: Minimum is -63V, Typical is -55V, Maximum is -49V |
| Output delay time (backplane to screw), max<br>Off-to-On<br>On-to-Off | 150 $\mu$ s                                                                            |
| Open load detection diagnostics                                       | Not supported                                                                          |
| Output short circuit/overload detection                               | Yes                                                                                    |
| Output short circuit/overload protection                              | Yes                                                                                    |
| Pilot duty rating                                                     | 1.2 A inrush current, 0.5 A rated current, DC-14                                       |
| Output states in program mode per point                               | Hold Last State<br>On                                                                  |

**Table 63. Technical Specifications - 5034-ENC, 5034-ENCXT – Digital Output (continued)**

| Attribute                                           | 5034-ENC, 5034-ENCXT                                    |
|-----------------------------------------------------|---------------------------------------------------------|
|                                                     | Off (Default)<br>Local Control                          |
| Output states in communication fault mode per point | Hold Last State<br>On<br>Off (Default)<br>Local Control |
| Duration of fault mode per point                    | 1 s<br>2 s<br>5 s<br>10 s<br>Forever (Default)          |
| Output final state after fault mode per point       | On<br>Off (Default)                                     |

(1) Recommended loading resistor - To limit the effects of leakage current through solid-state outputs, you can connect a loading resistor in parallel with your load. For 24V DC operation, use a 5.6 k $\Omega$ , 0.5 W resistor for transistor operation.

**Table 64. General Specifications - 5034-ENC, 5034-ENCXT**

| Attribute                      | 5034-ENC, 5034-ENCXT                     |
|--------------------------------|------------------------------------------|
| Number of HSC                  | 1 group of A+/A-, B+/B-, and Z+/Z-       |
| Number of SSI                  | 1 group of Data+/Data- and Clock+/Clock- |
| Number of inputs               | 1 channel, sinking                       |
| Number of outputs              | 2 channels, sourcing                     |
| SA power voltage, nom          | 24V DC                                   |
| SA power voltage range         | 10...30V DC                              |
| SA power current, nom          | 1.6 A                                    |
| SA power current, max          | 1.7 A                                    |
| SA power current at no load    | 12 mA                                    |
| SA reverse polarity protection | Yes                                      |
| SSV voltage range, SSV_24      | Follow SA power supply                   |
| SSV voltage range, SSV_5       | 5V ( $\pm 5\%$ )                         |

**Table 64. General Specifications - 5034-ENC, 5034-ENCXT (continued)**

| Attribute                               | 5034-ENC, 5034-ENCXT                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SSV current, SSV_24, max                | 500 mA                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| SSV current, SSV_5, max                 | 300 mA                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| SSV short-circuit protection, SSV_24    | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| SSV short-circuit protection, SSV_5     | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Power dissipation, max <sup>(1)</sup>   | 1.22 W                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Thermal dissipation, max <sup>(1)</sup> | 4.16 BTU/hr                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Isolation voltage                       | 250V (continuous), Basic Insulation Type, System to Field<br>250V (continuous), Basic Insulation Type, HSC input to other Field side<br>250V (continuous), Basic Insulation Type, HSC input to System<br>No isolation between SA power and Digital input/output points<br>No isolation between SA power and SSI ports<br>No isolation between SA power and SSV_24/SSV_5<br>No isolation between individual Digital input/output points |
| RIUP support                            | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| CIP Sync                                | Slave only ordinary clock                                                                                                                                                                                                                                                                                                                                                                                                              |
| Electronic keying                       | Electronic keying via programming software                                                                                                                                                                                                                                                                                                                                                                                             |
| RTB key positions (slot)                | 3, 7, 12                                                                                                                                                                                                                                                                                                                                                                                                                               |
| RTB supported                           | 5034-RTB18, 5034-RTB18S                                                                                                                                                                                                                                                                                                                                                                                                                |
| Wiring category <sup>(2)</sup>          | 2 - Signal ports<br>2 - Power ports                                                                                                                                                                                                                                                                                                                                                                                                    |
| Wiring specification                    | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a>                                                                                                                                                                                                                                                                               |
| Indicators                              | 1 green/red module status indicator<br>1 green/red SA power status indicator<br>5 yellow/red I/O status indicators<br>1 yellow I/O status indicator                                                                                                                                                                                                                                                                                    |
| Dimensions (HxWxD), approx              | 123.6 x 15.0 x 66.4 mm (4.87 x 0.59 x 2.61 in.)                                                                                                                                                                                                                                                                                                                                                                                        |
| Weight, approx                          | 45.0 g (1.59 oz.) - 5034-ENC<br>47.0 g (1.66 oz.) - 5034-ENCXT                                                                                                                                                                                                                                                                                                                                                                         |
| Enclosure type                          | None (Open-style)                                                                                                                                                                                                                                                                                                                                                                                                                      |

**Table 64. General Specifications - 5034-ENC, 5034-ENCXT (continued)**

| Attribute                | 5034-ENC, 5034-ENCXT |
|--------------------------|----------------------|
| North American temp code | T4                   |
| UKEX/ATEX temp code      | T4                   |
| IECEx temp code          | T4                   |

(1) Value is measured at 60 °C (140 °F). Power dissipation varies with temperature.

(2) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## Environmental Specifications and Certifications

The following tables provide the environmental specifications and certifications for the PointMax specialty I/O modules.

**Table 65. Environmental Specifications - PointMax Specialty I/O Modules**

| Attribute                                                                           | 5034-IOL4, 5034-SERIAL, 5034-ENC                                                                                                                                                                                                                                                                 | 5034-IOL4XT, 5034-SERIALXT, 5034-ENCXT |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| Temperature, operating                                                              | IEC 60068-2-1 (Test Ae, Operating Cold),<br>IEC 60068-2-2 (Test Be, Operating Dry Heat),<br>IEC 60068-2-14 (Test Nb, Operating Thermal Shock):<br>-25 °C ≤ Ta ≤ +60 °C (-13 °F ≤ Ta ≤ +140 °F) for horizontal orientation<br>-25 °C ≤ Ta ≤ +55 °C (-13 °F ≤ Ta ≤ +131 °F) for other orientations |                                        |
| Temperature, surrounding air, max                                                   | 60 °C (140 °F)                                                                                                                                                                                                                                                                                   |                                        |
| Temperature, nonoperating                                                           | IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold),<br>IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat),<br>IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock):<br>-40...+85 °C (-40...+185 °F)                                                                         |                                        |
| Relative humidity                                                                   | IEC 60068-2-30 (Test Db, Unpackaged Damp Heat):<br>5...95% noncondensing                                                                                                                                                                                                                         |                                        |
| Conformal coated                                                                    | No                                                                                                                                                                                                                                                                                               | Yes                                    |
| Corrosive Atmosphere<br>ASTM B845-97 Method K<br>Accelerated Test (20-Day Exposure) | Severity Level G3 <sup>(1)</sup> per ANSI/ISA 71.04-2013, Airborne Contaminants—Gases                                                                                                                                                                                                            | —                                      |

**Table 65. Environmental Specifications - PointMax Specialty I/O Modules (continued)**

| Attribute                                                                                                                                                                                                                                                                                                  | 5034-IOL4, 5034-SERIAL, 5034-ENC                                                           | 5034-IOL4XT, 5034-SERIALXT, 5034-ENCXT                                                                                                                              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Corrosive Atmosphere <ul style="list-style-type: none"> <li>ASTM B845-97 Method K Accelerated Test (30-Day Exposure)</li> <li>Plus additional Rockwell Automation proprietary accelerated corrosive environment test protocol for specific industries with sources of gaseous sulfur compounds.</li> </ul> | —                                                                                          | Severity Level GX <sup>(2)</sup> per ANSI/ISA 71.04-2013, Airborne Contaminants—Gases<br><br>Severity Level CX per IEC 60721-3-3:2019, Chemically Active Substances |
| Vibration                                                                                                                                                                                                                                                                                                  | IEC 60068-2-6 (Test Fc, Operating):<br><br>5 g @ 10...500 Hz                               |                                                                                                                                                                     |
| Shock, operating                                                                                                                                                                                                                                                                                           | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br><br>30 g                                    |                                                                                                                                                                     |
| Repetitive shock, operating                                                                                                                                                                                                                                                                                | IEC 60068-2-27:<br><br>25 g, 6 ms duration, 1000 shocks in each ± direction in each 3 axis |                                                                                                                                                                     |
| Shock, nonoperating                                                                                                                                                                                                                                                                                        | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br><br>50 g                                    |                                                                                                                                                                     |
| Emissions                                                                                                                                                                                                                                                                                                  | IEC 61000-6-4                                                                              |                                                                                                                                                                     |
| ESD immunity                                                                                                                                                                                                                                                                                               | IEC 61000-4-2:<br><br>6 kV contact discharges<br><br>8 kV air discharges                   |                                                                                                                                                                     |
| Radiated RF immunity                                                                                                                                                                                                                                                                                       | IEC 61000-4-3:<br><br>10V/m with 1 kHz sine wave 80% AM from 80...6000 MHz                 |                                                                                                                                                                     |
| EFT/B immunity                                                                                                                                                                                                                                                                                             | IEC 61000-4-4:<br><br>±3 kV @ 5 kHz on signal ports                                        |                                                                                                                                                                     |
| Surge transient immunity                                                                                                                                                                                                                                                                                   | IEC 61000-4-5:<br><br>±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports       |                                                                                                                                                                     |
| Conducted RF immunity                                                                                                                                                                                                                                                                                      | IEC 61000-4-6:<br><br>10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz            |                                                                                                                                                                     |

(1) Up to 86.4 g/(m<sup>2</sup>.yr), mass loss of copper due to corrosion.

(2) Up to 2100 angstroms of film growth per 30 days of copper and/or silver reactivity.

**Table 66. Certifications - PointMax Specialty I/O Modules**

| Certification <sup>(1)</sup> | 5034-IOL4, 5034-IOL4XT, 5034-SERIAL, 5034-SERIALXT, 5034-ENC, 5034-ENCXT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| c-UL-us                      | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657.<br><br>UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.                                                                                                                                                                                                                                                                                                                                                                                  |
| UK and CE                    | UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with:<br>EN 61326-1; Meas./Control/Lab., Industrial Requirements<br>EN 61000-6-2; Industrial Immunity<br>EN 61000-6-4; Industrial Emissions<br>EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)<br><br>UK Statutory Instrument 2016 No. 1101 and European Union 2014/35/EU LVD, compliant with:<br>EN 61010-2-201; Control Equipment Safety Requirements<br><br>UK Statutory Instrument 2012 No. 3032 and European Union 2011/65/EU RoHS, compliant with:<br>EN IEC 63000; Technical documentation |
| RCM                          | Australian Radiocommunications Act, compliant with:<br>EN 61000-6-4; Industrial Emissions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Ex                           | UK Statutory Instrument 2016 No. 1107 and European Union 2014/34/EU ATEX Directive, compliant with:<br>EN IEC 60079-0; General Requirements<br>EN IEC 60079-7; Explosive Atmospheres, Protection "e"<br>II 3 G Ex ec IIC T4 Gc<br>UL 24 ATEX 3272X and UL24UKEX2997X                                                                                                                                                                                                                                                                                                                                       |
| IECEx                        | IECEx System, compliant with:<br>IEC 60079-0; General Requirements<br>IEC 60079-7; Explosive Atmospheres, Protection "e"<br>II 3 G Ex ec IIC T4 Gc<br>IECEx UL 24.0066X                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| KC                           | Korean Registration of Broadcasting and Communications Equipment, compliant with:<br>Article 58-2 of Radio Waves Act, Clause 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Morocco                      | Arrêté ministériel n° 6404-15 du 1 er muharram 1437<br>Arrêté ministériel n° 6404-15 du 29 ramadan 1436                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| CCC                          | CNCA-C23-01 强制性产品认证实施规则 防爆电气<br>CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products<br>2025122309123247                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

(1) When marked. See the Product Certifications website at [rok.auto/certifications](http://rok.auto/certifications) for declarations of conformity, certificates, and other certification details.

# Expansion Power

| Module Type     | Catalog Number       | Description                |
|-----------------|----------------------|----------------------------|
| Expansion Power | 5034-EXP, 5034-EXPXT | Expansion power MOD and SA |

Environmental specifications and certifications for PointMax expansion power are provided in [Environmental Specifications and Certifications on page 135](#).

## 5034-EXP and 5034-EXPXT Expansion Power MOD and SA

Figure 64. 5034-EXP and 5034-EXPXT Diagram

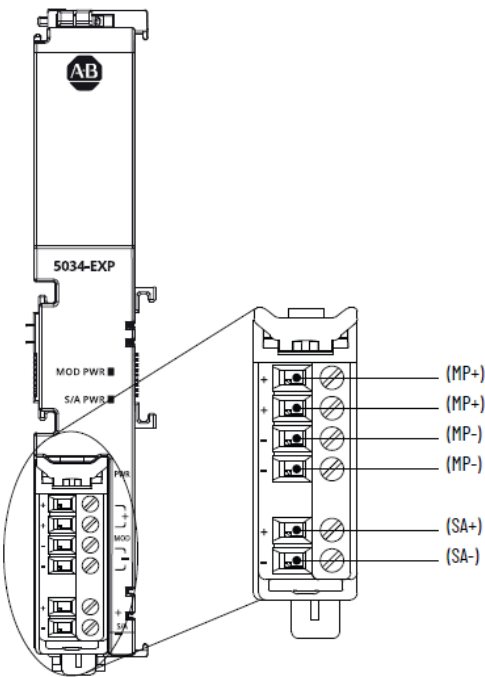


Table 67. General Specifications - 5034-EXP, 5034-EXPXT

| Attribute              | 5034-EXP, 5034-EXPXT                                                            |
|------------------------|---------------------------------------------------------------------------------|
| Number of MB supported | 16 for 18...30V DC<br>8 for 10...18V DC                                         |
| MP voltage, nom        | 24V DC, SELV                                                                    |
| MP voltage range       | 10...30V DC, SELV                                                               |
| MP current, nom        | 420 mA @ 24V DC                                                                 |
| MP current, max        | 550 mA @ 10 V DC (8 MB)<br>590 mA @ 18 V DC (16 MB)<br>370 mA @ 30 V DC (16 MB) |

**Table 67. General Specifications - 5034-EXP, 5034-EXPXT (continued)**

| Attribute                        | 5034-EXP, 5034-EXPXT                                                                                                                                      |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| MP inrush current, max           | 6 A for 10 ms @ 24V DC SELV                                                                                                                               |
| SA power operating voltage range | 10...30V DC, SELV                                                                                                                                         |
| SA power current, max            | 10 A<br>Do not exceed 10 A current draw at the SA power RTB.                                                                                              |
| SA power current at no load      | 2 mA                                                                                                                                                      |
| BP voltage                       | 16V DC                                                                                                                                                    |
| BP current, max                  | 250 mA (8 MB)<br>500 mA (16 MB)                                                                                                                           |
| Power dissipation, max           | 1.7 W                                                                                                                                                     |
| Thermal dissipation, max         | 5.8 BTU/hr                                                                                                                                                |
| Isolation voltage                | 250V (continuous), Basic Isolation, SA to backplane<br>250V (continuous), Basic Isolation, SA to MP<br>60V (continuous), Basic Isolation, MP to backplane |
| RTB supported                    | An RTB ships with the expansion power.<br>You can order additional screw-type (5034-AENRTB-QTY5) and push-in spring-type (5034-AENRTBS-QTY5) separately.  |
| Wiring category <sup>(1)</sup>   | 2 - Power ports                                                                                                                                           |
| Wiring specification             | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a>  |
| Indicators                       | 1 green module power status indicator<br>1 green SA power status indicator                                                                                |
| Dimensions (HxWxD), approx       | 131.7 x 20.0 x 75 mm (5.19 x 0.79 x 2.95 in.)                                                                                                             |
| Weight, approx                   | 109 g (3.84 oz.) - 5034-EXP<br>111 g (3.91 oz.) - 5034-EXPXT                                                                                              |
| Enclosure type                   | None (Open-style)                                                                                                                                         |
| North American temp code         | T4                                                                                                                                                        |
| UKEX/ATEX temp code              | T4                                                                                                                                                        |
| IECEX temp code                  | T4                                                                                                                                                        |

**Table 67. General Specifications - 5034-EXP, 5034-EXPXT (continued)**

| Attribute | 5034-EXP, 5034-EXPXT |
|-----------|----------------------|
|-----------|----------------------|

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## Environmental Specifications and Certifications

The following tables provide the environmental specifications and certifications for the PointMax expansion power.

**Table 68. Environmental Specifications - PointMax Expansion Power**

| Attribute                                                                                                                                                                                                                                                    | 5034-EXP                                                                                                                                                                                                                                                                                         | 5034-EXPXT                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature, operating                                                                                                                                                                                                                                       | IEC 60068-2-1 (Test Ae, Operating Cold),<br>IEC 60068-2-2 (Test Be, Operating Dry Heat),<br>IEC 60068-2-14 (Test Nb, Operating Thermal Shock):<br>-25 °C ≤ Ta ≤ +60 °C (-13 °F ≤ Ta ≤ +140 °F) for horizontal orientation<br>-25 °C ≤ Ta ≤ +55 °C (-13 °F ≤ Ta ≤ +131 °F) for other orientations |                                                                                                                                                                           |
| Temperature, surrounding air, max                                                                                                                                                                                                                            | 60 °C (140 °F)                                                                                                                                                                                                                                                                                   |                                                                                                                                                                           |
| Temperature, nonoperating                                                                                                                                                                                                                                    | IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold),<br>IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat),<br>IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock):<br>-40...+85 °C (-40...+185 °F)                                                                         |                                                                                                                                                                           |
| Relative humidity                                                                                                                                                                                                                                            | IEC 60068-2-30 (Test Db, Unpackaged Damp Heat):<br>5...95% noncondensing                                                                                                                                                                                                                         |                                                                                                                                                                           |
| Conformal coated                                                                                                                                                                                                                                             | No                                                                                                                                                                                                                                                                                               | Yes                                                                                                                                                                       |
| Corrosive Atmosphere<br>ASTM B845-97 Method K<br>Accelerated Test (20-Day<br>Exposure)                                                                                                                                                                       | Severity Level G3 <sup>(1)</sup> per ANSI/ISA 71.04-2013, Airborne<br>Contaminants—Gases                                                                                                                                                                                                         |                                                                                                                                                                           |
| Corrosive Atmosphere <ul style="list-style-type: none"> <li>ASTM B845-97 Method K<br/>Accelerated Test (30-Day<br/>Exposure)</li> <li>Plus additional Rockwell<br/>Automation proprietary<br/>accelerated corrosive<br/>environment test protocol</li> </ul> | —                                                                                                                                                                                                                                                                                                | Severity Level GX <sup>(2)</sup> per ANSI/ISA 71.04-2013, Airborne<br>Contaminants—Gases<br><br>Severity Level CX per IEC 60721-3-3:2019, Chemically Active<br>Substances |

**Table 68. Environmental Specifications - PointMax Expansion Power (continued)**

| Attribute                                                         | 5034-EXP                                                                                   | 5034-EXPXT |
|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------|------------|
| for specific industries with sources of gaseous sulfur compounds. |                                                                                            |            |
| Vibration                                                         | IEC 60068-2-6 (Test Fc, Operating):<br>5 g @ 10...500 Hz                                   |            |
| Shock, operating                                                  | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br>30 g                                        |            |
| Repetitive shock, operating                                       | IEC 60068-2-27:<br>25 g, 6 ms duration, 1000 shocks in each $\pm$ direction in each 3 axis |            |
| Shock, nonoperating                                               | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br>50 g                                        |            |
| Emissions                                                         | IEC 61000-6-4                                                                              |            |
| ESD immunity                                                      | IEC 61000-4-2:<br>6 kV contact discharges<br>8 kV air discharges                           |            |
| Radiated RF immunity                                              | IEC 61000-4-3:<br>10V/m with 1 kHz sine wave 80% AM from 80...6000 MHz                     |            |
| EFT/B immunity                                                    | IEC 61000-4-4:<br>$\pm 3$ kV @ 5 kHz on power ports                                        |            |
| Surge transient immunity                                          | IEC 61000-4-5:<br>$\pm 1$ kV line-line (DM) and $\pm 2$ kV line-earth (CM) on power ports  |            |
| Conducted RF immunity                                             | IEC 61000-4-6:<br>10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz                |            |
| Voltage dips and variations                                       | IEC 61000-4-29:<br>10 ms interruption on MP ports                                          |            |

(1) Up to 86.4 g/(m<sup>2</sup>.yr), mass loss of copper due to corrosion.

(2) Up to 2100 angstroms of film growth per 30 days of copper and/or silver reactivity.

**Table 69. Certifications - PointMax Expansion Power**

| Certification <sup>(1)</sup> | 5034-EXP, 5034-EXPXT                                                                      |
|------------------------------|-------------------------------------------------------------------------------------------|
| c-UL-us                      | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657. |

**Table 69. Certifications - PointMax Expansion Power (continued)**

| Certification <sup>(1)</sup> | 5034-EXP, 5034-EXPXT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                              | UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| UK and CE                    | <p>UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with:</p> <p>EN 61326-1; Meas./Control/Lab., Industrial Requirements</p> <p>EN 61000-6-2; Industrial Immunity</p> <p>EN 61000-6-4; Industrial Emissions</p> <p>EN 61131-2; Programmable Controllers (Clause 8, Zone A &amp; B)</p> <p>UK Statutory Instrument 2016 No. 1101 and European Union 2014/35/EU LVD, compliant with:</p> <p>EN 61010-2-201; Control Equipment Safety Requirements</p> <p>UK Statutory Instrument 2012 No. 3032 and European Union 2011/65/EU RoHS, compliant with:</p> <p>EN IEC 63000; Technical documentation</p> |
| RCM                          | <p>Australian Radiocommunications Act, compliant with:</p> <p>EN 61000-6-4; Industrial Emissions</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Ex                           | <p>UK Statutory Instrument 2016 No. 1107 and European Union 2014/34/EU ATEX Directive, compliant with:</p> <p>EN IEC 60079-0; General Requirements</p> <p>EN IEC 60079-7; Explosive Atmospheres, Protection "e"</p> <p>II 3 G Ex ec IIC T4 Gc</p> <p>UL 24 ATEX 3272X and UL24UKEX2997X</p>                                                                                                                                                                                                                                                                                                                                                   |
| IECEx                        | <p>IECEx System, compliant with:</p> <p>IEC 60079-0; General Requirements</p> <p>IEC 60079-7; Explosive Atmospheres, Protection "e"</p> <p>II 3 G Ex ec IIC T4 Gc</p> <p>IECEx UL 24.0066X</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| KC                           | <p>Korean Registration of Broadcasting and Communications Equipment, compliant with:</p> <p>Article 58-2 of Radio Waves Act, Clause 4</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Morocco                      | <p>Arrêté ministériel n° 6404-15 du 1 er muharram 1437</p> <p>Arrêté ministériel n° 6404-15 du 29 ramadan 1436</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| CCC                          | <p>CNCA-C23-01 强制性产品认证实施规则 防爆电气</p> <p>CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products</p> <p>2025122309123247</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

(1) When marked. See the Product Certifications website at [rok.auto/certifications](http://rok.auto/certifications) for declarations of conformity, certificates, and other certification details.


# Power Terminal Module

| Module Type           | Catalog Number           | Description                     |
|-----------------------|--------------------------|---------------------------------|
| Power Terminal Module | 5034-MBPTM, 5034-MBTPMXT | Power terminal module with base |

Environmental specifications and certifications for PointMax power terminal module are provided in [Environmental Specifications and Certifications on page 139](#).

## 5034-MBPTM and 5034-MBPTMXT Power Terminal Module with Base

Figure 65. 5034-MBPTM and 5034-MBPTMXT Wiring Diagram

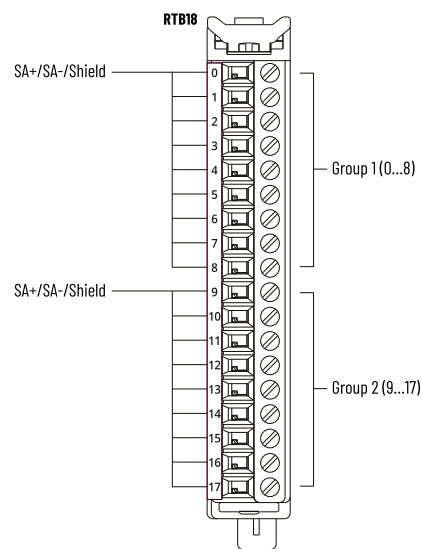

- You can install only one 5034-MBPTM or 5034-MBPTMXT to the right of each I/O module.
  - For 5034-IB16 and 5034-IB16XT only – You can install two consecutive 5034-MBPTM or 5034-MBPTMXT to the right of the module for 3-wire sensor applications.
- All nine terminals in each group are shorted.
- Each group can be connected to either SA+, SA-, or shield terminals from an external source.
- In each group, one terminal serves as the feeder and the other eight terminals function as outputs.

Table 70. General Specifications - 5034-MBPTM, 5034-MBPTMXT

| Attribute                                 | 5034-MBPTM, 5034-MBPTMXT |
|-------------------------------------------|--------------------------|
| SA power voltage, nom                     | 24V DC                   |
| SA power voltage range                    | 10...30V DC, SELV        |
| SA power current, per terminal group, max | 10 A                     |

**Table 70. General Specifications - 5034-MBPTM, 5034-MBPTMXT (continued)**

| Attribute                      | 5034-MBPTM, 5034-MBPTMXT                                                                                                                                 |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Isolation voltage              | 250V AC basic insulation between terminal group 1 and terminal group 2                                                                                   |
| RTB key positions (slot)       | 3, 6, 11                                                                                                                                                 |
| RTB supported                  | 5034-RTB18, 5034-RTB18S                                                                                                                                  |
| Wiring category <sup>(1)</sup> | 2 - Power ports                                                                                                                                          |
| Wiring specification           | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Dimensions (HxWxD), approx     | 132 x 15 x 75 mm (5.2 x 0.59 x 2.95 in.)                                                                                                                 |
| Weight, approx                 | 65.0 g (2.29 oz.) - MBPTM<br>67.0 g (2.36 oz.) - MBPTMXT                                                                                                 |
| Enclosure type                 | None (Open-style)                                                                                                                                        |
| North American temp code       | T4                                                                                                                                                       |
| UKEX/ATEX temp code            | T4                                                                                                                                                       |
| IECEx temp code                | T4                                                                                                                                                       |

(1) Use this Conductor Category information for planning conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#). Use this Conductor Category information for planning conductor routing as described in the appropriate System Level Installation Manual.

## Environmental Specifications and Certifications

The following tables provide the environmental specifications and certifications for the PointMax mounting base with potential power terminal module.

**Table 71. Environmental Specifications - PointMax Mounting Base with Potential Power Terminal Module**

| Attribute                         | 5034-MBPTM                                                                                                                                                                                                                                                                                       | 5034-MBPTMXT |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Temperature, operating            | IEC 60068-2-1 (Test Ae, Operating Cold),<br>IEC 60068-2-2 (Test Be, Operating Dry Heat),<br>IEC 60068-2-14 (Test Nb, Operating Thermal Shock):<br>-25 °C ≤ Ta ≤ +60 °C (-13 °F ≤ Ta ≤ +140 °F) for horizontal orientation<br>-25 °C ≤ Ta ≤ +55 °C (-13 °F ≤ Ta ≤ +131 °F) for other orientations |              |
| Temperature, surrounding air, max | 60 °C (140 °F)                                                                                                                                                                                                                                                                                   |              |
| Temperature, nonoperating         | IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold),<br>IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat),                                                                                                                                                                             |              |

**Table 71. Environmental Specifications - PointMax Mounting Base with Potential Power Terminal Module (continued)**

| Attribute                                                                                                                                                                                                                                                                                                  | 5034-MBPTM                                                                                       | 5034-MBPTMXT                                                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                            | IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock):<br>-40...+85 °C (-40...+185 °F) |                                                                                                                                                                     |
| Relative humidity                                                                                                                                                                                                                                                                                          | IEC 60068-2-30 (Test Db, Unpackaged Damp Heat):<br>5...95% noncondensing                         |                                                                                                                                                                     |
| Conformal coated                                                                                                                                                                                                                                                                                           | No                                                                                               | Yes                                                                                                                                                                 |
| Corrosive Atmosphere<br>ASTM B845-97 Method K<br>Accelerated Test (20-Day Exposure)                                                                                                                                                                                                                        | Severity Level G3 <sup>(1)</sup> per ANSI/ISA 71.04-2013, Airborne Contaminants—Gases            | —                                                                                                                                                                   |
| Corrosive Atmosphere <ul style="list-style-type: none"> <li>ASTM B845-97 Method K Accelerated Test (30-Day Exposure)</li> <li>Plus additional Rockwell Automation proprietary accelerated corrosive environment test protocol for specific industries with sources of gaseous sulfur compounds.</li> </ul> | —                                                                                                | Severity Level GX <sup>(2)</sup> per ANSI/ISA 71.04-2013, Airborne Contaminants—Gases<br><br>Severity Level CX per IEC 60721-3-3:2019, Chemically Active Substances |
| Vibration                                                                                                                                                                                                                                                                                                  | IEC 60068-2-6 (Test Fc, Operating):<br>5 g @ 10...500 Hz                                         |                                                                                                                                                                     |
| Shock, operating                                                                                                                                                                                                                                                                                           | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br>30 g                                              |                                                                                                                                                                     |
| Repetitive shock, operating                                                                                                                                                                                                                                                                                | IEC 60068-2-27:<br>25 g, 6 ms duration, 1000 shocks in each ± direction in each 3 axis           |                                                                                                                                                                     |
| Shock, nonoperating                                                                                                                                                                                                                                                                                        | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br>50 g                                              |                                                                                                                                                                     |

(1) Up to 86.4 g/(m2.yr), mass loss of copper due to corrosion.

(2) Up to 2100 angstroms of film growth per 30 days of copper and/or silver reactivity.

**Table 72. Certifications - PointMax Mounting Base with Potential Power Terminal Module**

| Certification <sup>(1)</sup> | 5034-MBPTM, 5034-MBPTMXT                                                                  |
|------------------------------|-------------------------------------------------------------------------------------------|
| c-UL-us                      | UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657. |

**Table 72. Certifications - PointMax Mounting Base with Potential Power Terminal Module (continued)**

| Certification <sup>(1)</sup> | 5034-MBPTM, 5034-MBPTMXT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                              | UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| UK and CE                    | <p>UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with:</p> <p>EN 61326-1; Meas./Control/Lab., Industrial Requirements</p> <p>EN 61000-6-2; Industrial Immunity</p> <p>EN 61000-6-4; Industrial Emissions</p> <p>EN 61131-2; Programmable Controllers (Clause 8, Zone A &amp; B)</p> <p>UK Statutory Instrument 2016 No. 1101 and European Union 2014/35/EU LVD, compliant with:</p> <p>EN 61010-2-201; Control Equipment Safety Requirements</p> <p>UK Statutory Instrument 2012 No. 3032 and European Union 2011/65/EU RoHS, compliant with:</p> <p>EN IEC 63000; Technical documentation</p> |
| RCM                          | <p>Australian Radiocommunications Act, compliant with:</p> <p>EN 61000-6-4; Industrial Emissions</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Ex                           | <p>UK Statutory Instrument 2016 No. 1107 and European Union 2014/34/EU ATEX Directive, compliant with:</p> <p>EN IEC 60079-0; General Requirements</p> <p>EN IEC 60079-7; Explosive Atmospheres, Protection "e"</p> <p>II 3 G Ex ec IIC T4 Gc</p> <p>UL 24 ATEX 3272X and UL24UKEX2997X</p>                                                                                                                                                                                                                                                                                                                                                   |
| IECEx                        | <p>IECEx System, compliant with:</p> <p>IEC 60079-0; General Requirements</p> <p>IEC 60079-7; Explosive Atmospheres, Protection "e"</p> <p>II 3 G Ex ec IIC T4 Gc</p> <p>IECEx UL 24.0066X</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| KC                           | <p>Korean Registration of Broadcasting and Communications Equipment, compliant with:</p> <p>Article 58-2 of Radio Waves Act, Clause 4</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Morocco                      | <p>Arrêté ministériel n° 6404-15 du 1 er muharram 1437</p> <p>Arrêté ministériel n° 6404-15 du 29 ramadan 1436</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| CCC                          | <p>CNCA-C23-01 强制性产品认证实施规则 防爆电气</p> <p>CNCA-C23-01 CCC Implementation Rule Explosion-Proof Electrical Products</p> <p>2025122309123247</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

(1) When marked. See the Product Certifications website at [rok.auto/certifications](http://rok.auto/certifications) for declarations of conformity, certificates, and other certification details.

# Removable Terminal Blocks

The I/O modules require an MB paired with an RTB to connect field-side wiring.

| Type                     | Catalog Number          | Description                                                                         |
|--------------------------|-------------------------|-------------------------------------------------------------------------------------|
| Removable Terminal Block | 5034-RTB2, 5034-RTB2S   | Removable terminal block 2-terminals (screw-type and push-in spring-type)           |
|                          | 5034-RTB6, 5034-RTB6S   | Removable terminal block 6-terminals (screw-type and push-in spring-type)           |
|                          | 5034-RTB18, 5034-RTB18S | Removable terminal block 18-terminals (screw-type and push-in spring-type)          |
|                          | 5034-RTB24S             | Removable terminal block 24-terminals (push-in spring-type)                         |
|                          | 5034-RTBT, 5034-RTBTS   | Removable terminal block with CJC 18-terminals (screw-type and push-in spring type) |

Environmental specifications and certifications for PointMax removable terminal blocks are provided in [Environmental Specifications on page 148](#).

# 5034-RTB2 and 5034-RTB2S Removable Terminal Blocks

Use these RTBs with the 5034-MBSA and 5034-MBSAXT mounting bases. These catalogs are not available for purchase individually. They can only be ordered in a pack of 5 (5034-RTB2-QTY5 or RTB2S-QTY5).

Figure 66. 5034-RTB2 and 5034-RTB2S Diagram




Table 73. General Specifications - 5034-RTB2, 5034-RTB2S

| Attribute                                     | 5034-RTB2, 5034-RTB2S                                                                                                                                    |
|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage rating                                | 240V AC                                                                                                                                                  |
| Current rating per position at 60 °C (140 °F) | 10 A                                                                                                                                                     |
| Wiring specification                          | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Dimensions (HxWxD), approx                    | 18.6 x 9.3 x 21.15 mm (0.73 x 0.37 x 0.83 in.)                                                                                                           |
| Weight, approx                                | 3.5 g (0.12 oz.) - 5034-RTB2<br>2.1 g (0.07 oz.) - 5034-RTB2S                                                                                            |
| Enclosure type                                | None (Open-style)                                                                                                                                        |
| North American temp code                      | T4                                                                                                                                                       |
| UKEX/ATEX temp code                           | T4                                                                                                                                                       |
| IECEx temp code                               | T4                                                                                                                                                       |

# 5034-RTB6 and 5034-RTB6S Removable Terminal Blocks

Use these RTBs with the 5034-AENTR and 5034-AENTRXT EtherNet/IP adapter or the 5034-EXP and 5034-EXPXT expansion power. These catalogs are not available for purchase individually. They can only be ordered in a pack of 5 (5034-AENRTB-QTY5 or 5034-AENRTBS-QTY5).

Figure 67. 5034-RTB6 and 5034-RTB6S Diagram

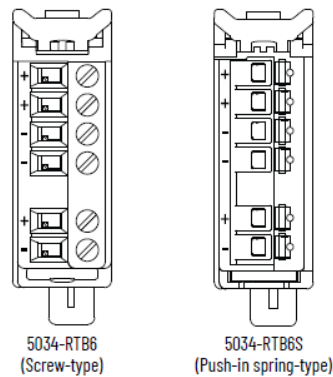


Table 74. General Specifications - 5034-RTB6, 5034-RTB6S

| Attribute                                     | 5034-RTB6, 5034-RTB6S                                                                                                                                    |
|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage rating                                | 240V AC                                                                                                                                                  |
| Current, max                                  | 10 A                                                                                                                                                     |
| Current rating per position at 60 °C (140 °F) | Positions 0...3: 2 A<br>Positions 4 and 5: 10 A                                                                                                          |
| Wiring specification                          | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Dimensions (HxWxD), approx                    | 46.6 x 14.7 x 31.3 mm (1.83 x 0.58 x 1.23 in.)                                                                                                           |
| Weight, approx                                | 11.2 g (0.39 oz.) - 5034-RTB6<br>7.9 g (0.28 oz.) - 5034-RTB6S                                                                                           |
| Enclosure type                                | None (Open-style)                                                                                                                                        |
| North American temp code                      | T4                                                                                                                                                       |
| UKEX/ATEX temp code                           | T4                                                                                                                                                       |
| IECEx temp code                               | T4                                                                                                                                                       |

# 5034-RTB18 and 5034-RTB18S Removable Terminal Blocks

Figure 68. 5034-RTB18 and 5034-RTB18S Diagram

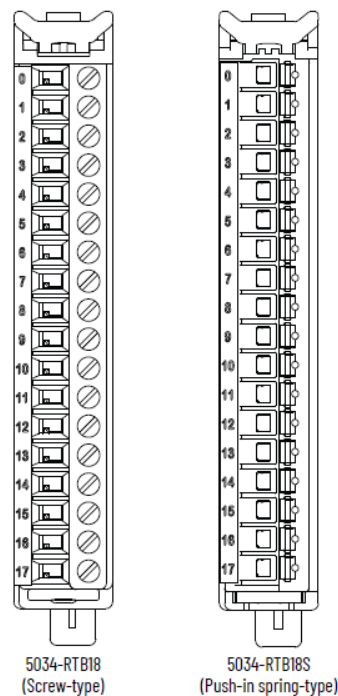


Table 75. General Specifications - 5034-RTB18, 5034-RTB18S

| Attribute                  | 5034-RTB18, 5034-RTB18S                                                                                                                                  |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage rating             | 240V AC                                                                                                                                                  |
| Current, max               | 10 A                                                                                                                                                     |
| Wiring specification       | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Dimensions (HxWxD), approx | 93.8 x 14.7 x 31.3 mm (3.69 x 0.58 x 1.23 in.)                                                                                                           |
| Weight, approx             | 28 g (0.99 oz.) - 5034-RTB18<br>18 g (0.63 oz.) - 5034-RTB18S                                                                                            |
| Enclosure type             | None (Open-style)                                                                                                                                        |
| North American temp code   | T4                                                                                                                                                       |
| UKEX/ATEX temp code        | T4                                                                                                                                                       |
| IECEx temp code            | T4                                                                                                                                                       |

# 5034-RTB24S Removable Terminal Blocks

Figure 69. 5034-RTB24S Diagram

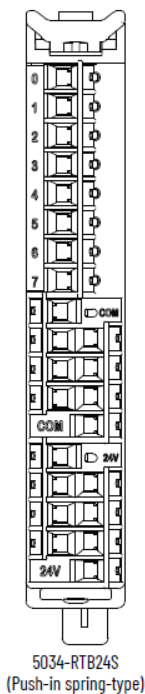


Table 76. General Specifications - 5034-RTB24S

| Attribute                  | 5034-RTB24S                                                                                                                                              |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage rating             | 240V AC                                                                                                                                                  |
| Current, max               | 10 A                                                                                                                                                     |
| Wiring specification       | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Dimensions (HxWxD), approx | 93.8 x 14.7 x 31.3 mm (3.69 x 0.58 x 1.23 in.)                                                                                                           |
| Weight, approx             | 20 g (0.70 oz.)                                                                                                                                          |
| Enclosure type             | None (Open-style)                                                                                                                                        |
| North American temp code   | T4                                                                                                                                                       |
| UKEX/ATEX temp code        | T4                                                                                                                                                       |
| IECEx temp code            | T4                                                                                                                                                       |

# 5034-RTBT and 5034-RTBTS Removable Terminal Blocks with CJC

Use these RTBs with the 5034-IRT4I and 5034-IRT4IXT analog 4 input isolated RTD/TC modules to help achieve better accuracy.

Figure 70. 5034-RTBT and 5034-RTBTS Diagram

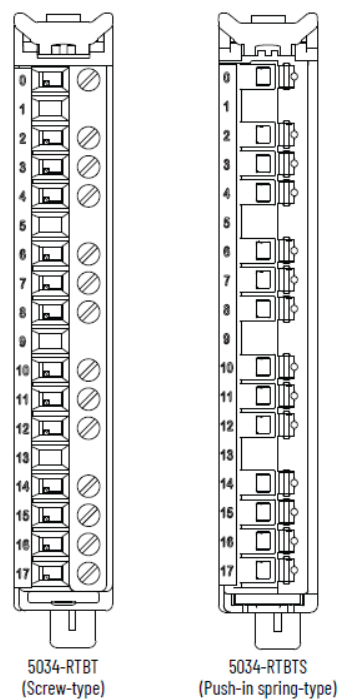


Table 77. General Specifications - 5034-RTBT, 5034-RTBTS

| Attribute                  | 5034-RTBT, 5034-RTBTS                                                                                                                                    |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage rating             | 240V AC                                                                                                                                                  |
| Current, max               | 10 A                                                                                                                                                     |
| Wiring specification       | See Wiring Specifications for Removable Terminal Blocks in the PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a> |
| Dimensions (HxWxD), approx | 93.8 x 14.7 x 31.3 mm (3.69 x 0.58 x 1.23 in.)                                                                                                           |
| Weight, approx             | 27.0 g (0.95 oz.) - 5034-RTBT<br>17.0 g (0.60 oz.) - 5034-RTBTS                                                                                          |
| Enclosure type             | None (Open-style)                                                                                                                                        |
| North American temp code   | T4                                                                                                                                                       |
| UKEX/ATEX temp code        | T4                                                                                                                                                       |
| IECEx temp code            | T4                                                                                                                                                       |

## Environmental Specifications

The following table provides the environmental specifications for the PointMax removable terminal blocks.

**Table 78. Environmental Specifications - PointMax Removable Terminal Blocks**

| Attribute                         | 5034-RTB2, 5034-RTB2S, 5034-RTB6, 5034-RTB6S, 5034-RTB18, 5034-RTB18S, 5034-RTB24S, 5034-RTBT, 5034-RTBTS                                                                                                                                                                                        |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature, operating            | IEC 60068-2-1 (Test Ae, Operating Cold),<br>IEC 60068-2-2 (Test Be, Operating Dry Heat),<br>IEC 60068-2-14 (Test Nb, Operating Thermal Shock):<br>-25 °C ≤ Ta ≤ +60 °C (-13 °F ≤ Ta ≤ +140 °F) for horizontal orientation<br>-25 °C ≤ Ta ≤ +55 °C (-13 °F ≤ Ta ≤ +131 °F) for other orientations |
| Temperature, surrounding air, max | 60 °C (140 °F)                                                                                                                                                                                                                                                                                   |
| Temperature, nonoperating         | IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold),<br>IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat),<br>IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock):<br>-40...+85 °C (-40...+185 °F)                                                                         |
| Relative humidity                 | IEC 60068-2-30 (Test Db, Unpackaged Damp Heat):<br>5...95% noncondensing                                                                                                                                                                                                                         |
| Vibration                         | IEC 60068-2-6 (Test Fc, Operating):<br>5 g @ 10...500 Hz                                                                                                                                                                                                                                         |
| Shock, operating                  | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br>30 g                                                                                                                                                                                                                                              |
| Repetitive shock, operating       | IEC 60068-2-27:<br>25 g, 6 ms duration, 1000 shocks in each ± direction in each 3 axis                                                                                                                                                                                                           |
| Shock, nonoperating               | IEC 60068-2-27 (Test Ea, Unpackaged Shock):<br>50 g                                                                                                                                                                                                                                              |
| Emissions                         | IEC 61000-6-4                                                                                                                                                                                                                                                                                    |
| ESD immunity                      | IEC 61000-4-2:<br>6 kV contact discharges<br>8 kV air discharges                                                                                                                                                                                                                                 |
| Radiated RF immunity              | IEC 61000-4-3:<br>10V/m with 1 kHz sine wave 80% AM from 80...6000 MHz                                                                                                                                                                                                                           |
| EFT/B immunity                    | IEC 61000-4-4:<br>±3 kV @ 5 kHz on signal ports                                                                                                                                                                                                                                                  |

Table 78. Environmental Specifications - PointMax Removable Terminal Blocks (continued)

|                          |                                                                                                           |
|--------------------------|-----------------------------------------------------------------------------------------------------------|
| Attribute                | 5034-RTB2, 5034-RTB2S, 5034-RTB6, 5034-RTB6S, 5034-RTB18, 5034-RTB18S, 5034-RTB24S, 5034-RTBT, 5034-RTBTS |
| Surge transient immunity | IEC 61000-4-5:<br>±2 kV line-earth (CM) on signal ports                                                   |
| Conducted RF immunity    | IEC 61000-4-6:<br>10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz                               |

## Wiring Specifications for Removable Terminal Blocks

These wiring specifications apply to all PointMax removable terminal blocks – 5034-RTB2, 5034-RTB2S, 5034-RTB6, 5034-RTB6S, 5034-RTB18, 5034-RTB18S, 5034-RTB24S, 5034-RTBT, 5034-RTBTS.

Wire conductor and insulation rating must support a minimum temperature rating of 105 °C (221 °F). The tightening torque value for screw-type RTBs is 0.22...0.25 N•m (1.95...2.21 lb•in.).

**Table 79. Wiring Specification – 1-wire**

| Wire Type                 | Wire Range                               |
|---------------------------|------------------------------------------|
| Stranded and solid copper | 0.34...1.5 mm <sup>2</sup> (22...16 AWG) |

Screw RTB tightening torque: 0.22...0.25 N•m (1.95...2.21 lb•in)

Recommended strip length: 10 ± 0.4 mm (± 0.016 in.)

**Table 80. Wiring Specification – 1-wire with Plastic Sleeve Ferrule**

| Wire Type       | Wire Range                              | Ferrule Length                  | Example                                                                             |
|-----------------|-----------------------------------------|---------------------------------|-------------------------------------------------------------------------------------|
| Stranded copper | 0.5...1.5 mm <sup>2</sup> (20...16 AWG) | 10 mm (0.39 in.) <sup>(1)</sup> |  |
| Stranded copper | 0.34 mm <sup>2</sup> (22 AWG)           | 8 mm (0.31 in.) <sup>(2)</sup>  |                                                                                     |

Recommended crimper: Phoenix Contact Crimpfox 6, Weidmuller PZ 6 Roto, and TE 539660-1

Recommended strip length: See ferrule manufacturer's recommendation.

(1) DIN standard: 46228-4

(2) Non-DIN standard application

**Table 81. Wiring Specification – 1-wire with Non-plastic Sleeve Ferrule**

| Wire Type       | Wire Range                              | Ferrule Length                  | Example                                                                               |
|-----------------|-----------------------------------------|---------------------------------|---------------------------------------------------------------------------------------|
| Stranded copper | 0.5...1.5 mm <sup>2</sup> (20...16 AWG) | 10 mm (0.39 in.) <sup>(1)</sup> |  |
| Stranded copper | 0.34 mm <sup>2</sup> (22 AWG)           | 7 mm (0.28 in.) <sup>(2)</sup>  |                                                                                       |

Recommended crimper: Phoenix Contact Crimpfox 6, Weidmuller PZ 6 Roto, and TE 539660-1

Recommended strip length: See ferrule manufacturer's recommendation.

(1) DIN standard: 46228-4

(2) Non-DIN standard application

# Accessories

| Catalog Number                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Description                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| 5034-AENRTB-QTY5<br>5034-AENRTBS-QTY5                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 6-pin RTB (Qty. 5) for EtherNet/IP adapter and expansion power      |
| 5034-RTB2-QTY5<br>5034-RTB2S-QTY5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2-pin RTB (Qty. 5) for mounting base 15 mm (0.59 in.) with SA power |
| 5034-ECR-QTY5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | I/O system end cap (Qty. 5)                                         |
| 5034-CM18-IB16-QTY5<br>5034-CM18-OB16-QTY5<br>5034-CM18-IB8-QTY5<br>5034-CM18-IB8S-QTY5<br>5034-CM18-OB8-QTY5<br>5034-CM18-OB4-QTY5<br>5034-CM18-UB8-QTY5<br>5034-CM18-IF4-QTY5<br>5034-CM18-IF4IH-QTY5<br>5034-CM18-OF4-QTY5<br>5034-CM18-OF4IH-QTY5<br>5034-CM18-IF8C-QTY5<br>5034-CM18-IF8V-QTY5<br>5034-CM18-IRT4I-QTY5<br>5034-CM18-OW4I-QTY5<br>5034-CM18-IOL4-QTY5<br>5034-CM18-SERIAL-QTY5<br>5034-CM18-ENC-QTY5<br>5034-CM18-MBPTM-QTY5<br>5034-CM24-IF8-QTY5<br>5034-CM24-IB8-QTY5<br>5034-CM24-UB8-QTY5 | Color markers for RTB (Qty. 5)                                      |
| 5034-KEY-QTY5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | RTB insertable key (Qty. 5)                                         |
| 5034-SHIELD-QTY5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 1-wire shield clamp (Qty. 5)                                        |
| 5034-WIREHLD-QTY5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Wire or cable holder (Qty. 5)                                       |
| 5034-N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Filler module                                                       |

## 5034-AENRTB-QTY5 and 5034-AENRTBS-QTY5 RTB for EtherNet/IP Adapter and Expansion Power

Use these catalog numbers to order additional screw-type (5034-RTB6) or push-in spring-type (5034-RTB6S) RTBs for use with the 5034-AENTR and 5034-AENTRXT EtherNet/IP adapters, and 5034-EXP and 5034-EXPXT expansion power. Each RTB is available in a pack of five units.

For specifications, see [5034-RTB6 and 5034-RTB6S Removable Terminal Blocks on page 144](#).

## 5034-RTB2-QTY5 and 5034-RTB2S-QTY5 RTB for MBSA Mounting Base


Use these catalog numbers to order additional screw-type (5034-RTB2) or push-in spring-type (5034-RTB2S) RTBs for use with the 5034-MBSA and 5034-MBSAXT mounting bases. Each RTB is available in a pack of five units.

For specifications, see [5034-RTB2 and 5034-RTB2S Removable Terminal Blocks on page 143](#).

## 5034-ECR-QTY5 End Cap

Use this catalog number to order additional end caps. Install an end cap to cover the exposed interconnections on the adapter or the last mounting base on the DIN rail. The end cap is available in a pack of five units.


**Figure 71. 5034-ECR Diagram**

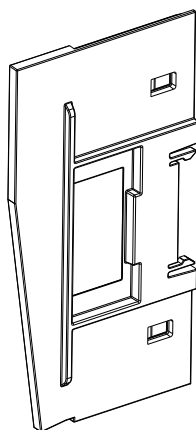

## 5034-CM18 and 5034-CM24 Color Markers for Removable Terminal Blocks

Use color markers to help you identify the type of I/O module that an RTB is used with. Each color marker is available in a pack of five units.

**Figure 72. 5034-CM18 and 5034-CM24 Diagram**

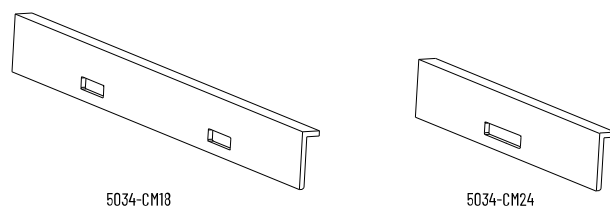

**Table 82. Color Markers for RTBs**

| Catalog Number        | Use with RTB                                     | Description                                                                |
|-----------------------|--------------------------------------------------|----------------------------------------------------------------------------|
| 5034-CM18-IB16-QTY5   | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-IB16 and 5034-IB16XT (Qty. 5)                        |
| 5034-CM18-OB16-QTY5   | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-OB16 and 5034-OB16XT (Qty. 5)                        |
| 5034-CM18-IB8-QTY5    | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-IB8 and 5034-IB8XT (Qty. 5)                          |
| 5034-CM18-IB8S-QTY5   | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-IB8S and 5034-IB8SXT (Qty. 5)                        |
| 5034-CM18-OB8-QTY5    | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-OB8, 5034-OB8XT, 5034-OB8S, and 5034-OB8SXT (Qty. 5) |
| 5034-CM18-OB4-QTY5    | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-OB4 and 5034-OB4XT (Qty. 5)                          |
| 5034-CM18-UB8-QTY5    | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-UB8, 5034-UB8XT, 5034-UB8F, and 5034-UB8FXT (Qty. 5) |
| 5034-CM18-IF4-QTY5    | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-IF4IH and 5034-IF4IHXT (Qty. 5)                      |
| 5034-CM18-IF4IH-QTY5  | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-IF4 and 5034-IF4XT (Qty. 5)                          |
| 5034-CM18-OF4-QTY5    | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-OF4 and 5034-OF4XT (Qty. 5)                          |
| 5034-CM18-OF4IH-QTY5  | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-OF4IH and 5034-OF4IHXT (Qty. 5)                      |
| 5034-CM18-IF8C-QTY5   | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-IF8C and 5034-IF8CXT (Qty. 5)                        |
| 5034-CM18-IF8V-QTY5   | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-IF8V and 5034-IF8VXT (Qty. 5)                        |
| 5034-CM18-IRT4I-QTY5  | 5034-RTB18, 5034-RTB18S<br>5034-RTBT, 5034-RTBTS | Color marker for 5034-IRT4I and 5034-IRT4IXT (Qty. 5)                      |
| 5034-CM18-OW4I-QTY5   | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-OW4I and 5034-OW4IXT (Qty. 5)                        |
| 5034-CM18-IOL4-QTY5   | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-IOL4 and 5034-IOL4XT (Qty. 5)                        |
| 5034-CM18-SERIAL-QTY5 | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-SERIAL and 5034-SERIALXT (Qty. 5)                    |
| 5034-CM18-ENC-QTY5    | 5034-RTB18, 5034-RTB18S                          | Color marker for 5034-ENC and 5034-ENCXT (Qty. 5)                          |


**Table 82. Color Markers for RTBs (continued)**

| Catalog Number       | Use with RTB            | Description                                                                  |
|----------------------|-------------------------|------------------------------------------------------------------------------|
| 5034-CM18-MBPTM-QTY5 | 5034-RTB18, 5034-RTB18S | Color marker for 5034-MBPTM and 5034-MBPTMXT (Qty. 5)                        |
| 5034-CM24-IF8-QTY5   | 5034-RTB24S             | Color marker for 5034-IF8C, 5034-IF8CXT, 5034-IF8V, and 5034-IF8VXT (Qty. 5) |
| 5034-CM24-IB8-QTY5   | 5034-RTB24S             | Color marker for 5034-IB8 and 5034-IB8XT (Qty. 5)                            |
| 5034-CM24-UB8-QTY5   | 5034-RTB24S             | Color marker for 5034-UB8, 5034-UB8XT, 5034-UB8F, and 5034-UB8FXT (Qty. 5)   |

## 5034-KEY-QTY5 Insertable Key for Removable Terminal Blocks


Use an insertable key to match an RTB to a type of I/O module. The insertable key is available in a pack of five units.

For the RTB key positions of each I/O module, see the PointMax I/O System Installation Instructions, publication [5034-IN001](#).

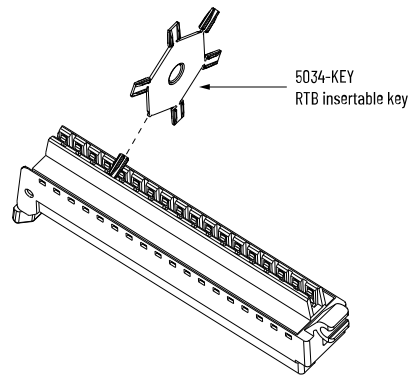**Figure 73. 5034-KEY Diagram**


## 5034-SHIELD-QTY5 Shield Clamp


The shield clamp is available in a pack of five units.

**Figure 74. 5034-SHIELD Diagram**


## 5034-WIREHLD-QTY5 Wire Holder

The wire holder is available in a pack of five units.


**Figure 75. 5034-WIREHLD Diagram**



# 5034-N Filler Module

Use the filler module to occupy an empty slot in an I/O chassis, typically where an MB is installed but no I/O module is present. The filler module can be used to hold an RTB in place. The filler module contains no electronics.

**Figure 76. 5034-N Diagram**

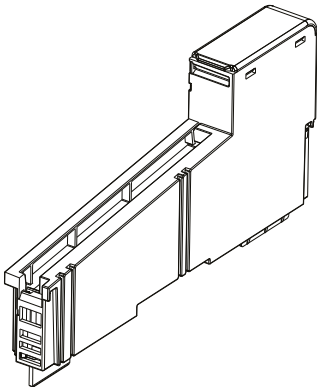

## Additional Resources

These documents contain additional information concerning related products from Rockwell Automation. You can view or download publications at [rok.auto/literature](http://rok.auto/literature).

**Table 83. Additional Resources**

| Resources                                                                                                                        | Description                                                                                                                                                                                                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PointMax I/O System Specifications Technical Data, publication <a href="#">5034-TD001</a>                                        | Provides PointMax I/O system specifications.                                                                                                                                                                                                                                    |
| PointMax I/O System Installation Instructions, publication <a href="#">5034-IN001</a>                                            | Provides instructions on installing a complete PointMax I/O system.                                                                                                                                                                                                             |
| PointMax EtherNet/IP Adapter User Manual, publication <a href="#">5034-UM001</a>                                                 | Provides information on how to configure and operate PointMax EtherNet/IP adapters.                                                                                                                                                                                             |
| PointMax Digital I/O Modules User Manual, publication <a href="#">5034-UM002</a>                                                 | Provides information on how to configure and operate PointMax digital I/O modules.                                                                                                                                                                                              |
| PointMax Analog I/O Modules User Manual, publication <a href="#">5034-UM003</a>                                                  | Provides information on how to configure and operate PointMax analog I/O modules.                                                                                                                                                                                               |
| PointMax IO-Link Master Module User Manual, publication <a href="#">5034-UM004</a>                                               | Provides information on how to configure and operate the PointMax IO-Link master module.                                                                                                                                                                                        |
| PointMax Serial Module User Manual, publication <a href="#">5034-UM005</a>                                                       | Provides information on how to configure and operate the PointMax serial module.                                                                                                                                                                                                |
| PointMax High-speed Counter/SSI Encoder User Manual, publication <a href="#">5034-UM006</a>                                      | Provides information on how to configure and operate the PointMax high-speed counter/SSI encoder module.                                                                                                                                                                        |
| PointMax Analog HART I/O Modules User Manual, publication <a href="#">5034-UM007</a>                                             | Provides information on how to configure and operate the PointMax analog HART I/O modules.                                                                                                                                                                                      |
| EtherNet/IP Network Devices User Manual, publication <a href="#">ENET-UM006</a>                                                  | Describes how to configure and use EtherNet/IP devices to communicate on the EtherNet/IP network.                                                                                                                                                                               |
| Ethernet Reference Manual, publication <a href="#">ENET-RM002</a>                                                                | Describes basic Ethernet concepts, infrastructure components, and infrastructure features.                                                                                                                                                                                      |
| System Security Design Guidelines Reference Manual, publication <a href="#">SECURE-RM001</a>                                     | Provides guidance on how to conduct security assessments, implement Rockwell Automation® products in a secure system, harden the control system, manage user access, and dispose of equipment.                                                                                  |
| Safety Guidelines for the Application, Installation, and Maintenance of Solid-state Control, publication <a href="#">SGI-1.1</a> | Designed to harmonize with NEMA Standards Publication No. ICS 1.1-1987 and provides general guidelines for the application, installation, and maintenance of solid-state control in the form of individual devices or packaged assemblies incorporating solid-state components. |
| Industrial Automation Wiring and Grounding Guidelines, publication <a href="#">1770-4.1</a>                                      | Provides general guidelines for installing a Rockwell Automation industrial system.                                                                                                                                                                                             |
| Product Selection and Configuration tools website, <a href="http://rok.auto/systemtools">rok.auto/systemtools</a>                | Helps configure complete, valid catalog numbers and build complete quotes based on detailed product information.                                                                                                                                                                |

Table 83. Additional Resources (continued)

| Resources                                                                                            | Description                                                                         |
|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Product Certifications website, <a href="http://rok.auto/certifications">rok.auto/certifications</a> | Provides declarations of conformity, certificates, and other certification details. |

# Rockwell Automation Support

Use these resources to access support information.

|                                                  |                                                                                                            |                                                                  |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| Technical Support Center                         | Find help with how-to videos, FAQs, chat, user forums, and product notification updates.                   | <a href="http://rok.auto/support">rok.auto/support</a>           |
| Local Technical Support Phone Numbers            | Locate the telephone number for your country.                                                              | <a href="http://rok.auto/phonesupport">rok.auto/phonesupport</a> |
| Technical Documentation Center                   | Quickly access and download technical specifications, installation instructions, and user manuals.         | <a href="http://rok.auto/techdocs">rok.auto/techdocs</a>         |
| Literature Library                               | Find installation instructions, manuals, brochures, and technical data publications.                       | <a href="http://rok.auto/literature">rok.auto/literature</a>     |
| Product Compatibility and Download Center (PCDC) | Get help determining how products interact, check features and capabilities, and find associated firmware. | <a href="http://rok.auto/pcdc">rok.auto/pcdc</a>                 |

## Documentation Feedback

Your comments help us serve your documentation needs better. If you have any suggestions on how to improve our content, complete the form at [rok.auto/docfeedback](http://rok.auto/docfeedback).

## Waste Electrical and Electronic Equipment (WEEE)



At the end of life, this equipment should be collected separately from any unsorted municipal waste.

Rockwell Automation maintains current product environmental information on its website at [rok.auto/pec](http://rok.auto/pec).

Allen-Bradley, expanding human possibility, FactoryTalk, GuardLogix, Logix 5000, PointMax, Rockwell Automation, Studio 5000 Logix Designer, and TechConnect are trademarks of Rockwell Automation, Inc.

CIP, CIP Sync, ControlNet, DeviceNet, and EtherNet/IP are trademarks of ODVA, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Automation NV Commercial Registration Number 0424.293.935

Rockwell Otomasyon Ticaret A.Ş. Kar Plaza İş Merkezi E Blok Kat:6 34752 İçerenköy, İstanbul, Tel: +90 (216) 5698400 EEE Yönetmeliğine Uygundur

Connect with us.    

**rockwellautomation.com** — expanding **human possibility**<sup>®</sup>

AMERICAS: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000

EUROPE/MIDDLE EAST/AFRICA: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2663 0600

ASIA PACIFIC: Rockwell Automation SEA Pte Ltd, 2 Corporation Road, #04-05, Main Lobby, Corporation Place, Singapore 618494, Tel: (65) 6510 6608

UNITED KINGDOM: Rockwell Automation Ltd., Pitfield, Kiln Farm, Milton Keynes, MK11 3DR, United Kingdom, Tel: (44)(1908) 838-800