


Insert Accessories

B205, B206, B220 X Type End Caps


- UL listed for raceway use only
- Material: 12 Gauge (2.6)
- Standard finish: ZN



Part No.	Use With	A		Wt./C Lbs. kg
		In.	mm	
B205	B22	1 ²¹ / ₃₂ "	(42.0)	10 (4.5)
B206	B32	1 ¹³ / ₃₂ "	(35.7)	8 (3.6)
B220	B52	2 ⁷ / ₃₂ "	(21.4)	4 (1.8)

B3322, B3332, B3342, B3352 Y Type End Caps


- UL listed for raceway use only
- Material: 14 Gauge (1.9)
- Standard finish: ZN

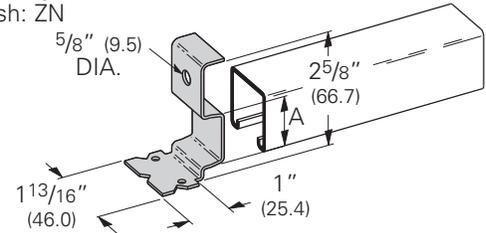

Part No.	Use With	A		Wt./C Lbs. kg
		In.	mm	
B3322	B22	1.270	(32.2)	15 (6.8)
B3332	B32	1.000	(25.4)	15 (6.8)
B3342	B42	.645	(16.4)	15 (6.8)
B3352	B52	.460	(11.7)	15 (6.8)


B380 Joint Splice Plate

- Used at splice points to prevent concrete seepage in long continuous runs of concrete inserts.
- Material: 18 Gauge (1.2)
- Standard finish: GALV



Part No.	Use With	A		Wt./C Lbs. kg
		In.	mm	
B380-22	B22	1 ⁵ / ₈ "	(41.3)	11 (5.0)
B380-32	B32	1 ³ / ₈ "	(34.9)	10 (4.5)
B380-42	B42	1"	(25.4)	9 (4.1)
B380-52	B52	1 ³ / ₁₆ "	(20.6)	7 (3.2)

B22IFS-B52IFS Styrofoam Filler Strip



Part No.	A		B		Wt./C Lbs. kg
	Ft.	mm	In.	mm	
B22-IFS	4'	(1219)	1 ⁷ / ₃₂ "	(309)	10 (4.5)
B32-IFS	4'	(1219)	1"	(254)	9 (4.1)
B52-IFS	4'	(1219)	2 ¹ / ₃₂ "	(167)	7 (3.2)

Concrete Inserts

Pipe Sleeve Fasteners

- Allows for rigid attachment of pipe sleeves to wall and floor forms for concrete pouring.
- Accommodates Schedule 40, Schedule 80, or 5/16" (8) and smaller wall thickness.
- Simply installed with a hammer.




BD40



BE-5-8 & BE-9-12

Part No.	Sleeve Diameter	Wall Thickness
BD40	All Dia.	5/16" & under
BE-5-8	6"	Schedule 80 pipe
BE-9-12	9" - 14"	Schedule 80 pipe

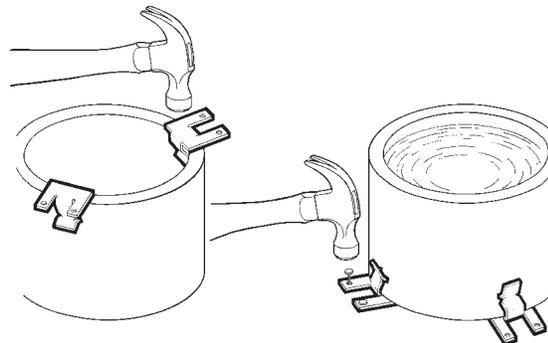

Reference page 213 for general fitting and standard finish specifications