

CMP4111M

Application

- Utility meter. main disconnect and distribution panel

Construction

- Type 3R construction
- Surface mount
- Separate, sealable utility termination and meter compartments
- Padlockable main disconnect and distribution panel compartment
- Standard with circuit breaker main disconnect (class 'T' fused pullout also available)

Standards

- Meets utility requirements
- UL listed
- Complies with ANSI C12.7
- Conforms to NEMA Standard for Type 3R

Finish

- ANSI 61 Gray (consult sales for other finish requirements)
- See page 150 for additional finishes

Accessories

- Fifth jaw kit #50365 (single phase systems)
- Filler plate kit #25319
- Screw type sealing ring #25016D

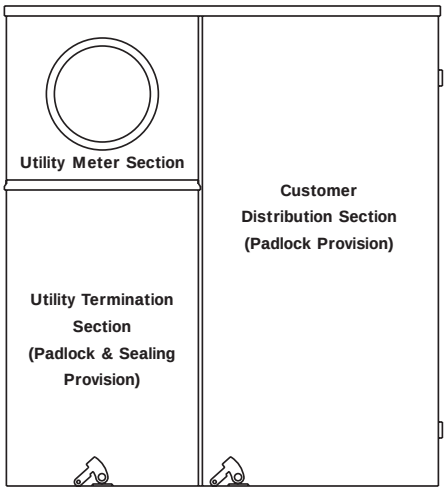

Post / Wall Mount

Catalog Number	Ampacity	Voltage	Phase	Meter Socket	Main Breaker	Branch Circuits	Branch Circuit Type
CMP4111M	100	240	1Ø, 3W	CD	100/2	12	PLUG-IN
CMP4111MC	100	240	1Ø, 3W	SS	100/2	12	PLUG-IN
CMP4111MCH	100	480	1Ø, 3W	SS	100/2	14	BOLT-ON
CMP4411M	100	240	3Ø, 4W	CD	100/3	12	PLUG-IN
CMP4411MC	100	240	3Ø, 4W	SS	100/3	12	PLUG-IN
CMP4411MCH	100	480	3Ø, 4W	SS	100/3	12	BOLT-ON
CMP4121M	200	240	1Ø, 3W	CD	200/2	12	PLUG-IN
CMP4121MC	200	240	1Ø, 3W	SS	200/2	12	PLUG-IN
CMP4121MCH	200	480	1Ø, 3W	SS	200/2	18	BOLT-ON
CMP4421M	200	240	3Ø, 4W	CD	200/3	12	PLUG-IN
CMP4421MC	200	240	3Ø, 4W	SS	200/3	12	PLUG-IN
CMP4421MCH	200	480	3Ø, 4W	SS	200/3	18	BOLT-ON

CD = Standard - No By-Pass
SS = Safety Socket - Test By-Pass
3Ø, 3W systems also available

Data subject to change without notice. Consult local utility for area acceptance. All dimensions in inches.