## Application

- Termination. main disconnect and distribution panel

## Construction

- Type 3R construction
- Pad mount
- Separate, sealable termination behind padlockable door
- Padlockable main disconnect and distribution compartments with space available for custom control (consult sales office for special distribution and control requirements)
- Standard with circuit breaker main disconnect (class 'T' fused pullout also available)

## Standards


- No utility meter provision, consult utility for compliance
- UL listed
- Complies with ANSI C12.7
- Conforms to NEMA Standard for Type 3R

## Finish

- ANSI 61 Gray (consult sales for other finish requirements)
- See page 150 for additional finishes

## Accessories

- Filler plate kit #25319
- Pad mounting base (see chart)

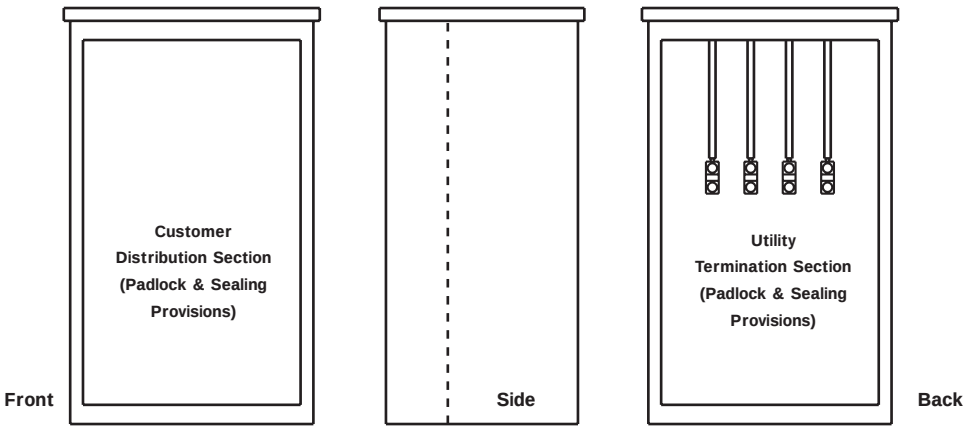


## Pad Mount - Un-Metered

| Catalog Number | Ampacity | Voltage | Phase | Main Breaker | Branch Circuits | Branch Circuit Type | Mounting Pad |
|---|---|---|---|---|---|---|---|
| CUP4111 | 100 | 240 | 1Ø, 3W | 100/2 | 12 | PLUG-IN | MB1515 |
| CUP4111H | 100 | 480 | 1Ø, 3W | 100/2 | 14 | BOLT-ON | MB2015 |
| CUP4411 | 100 | 240 | 3Ø, 4W | 100/3 | 12 | PLUG-IN | MB1515 |
| CUP4411H | 100 | 480 | 3Ø, 4W | 100/3 | 12 | BOLT-ON | MB2015 |
| CUP4121 | 200 | 240 | 1Ø, 3W | 200/2 | 12 | PLUG-IN | MB1515 |
| CUP4121H | 200 | 480 | 1Ø, 3W | 200/2 | 18 | BOLT-ON | MB2015 |
| CUP4421 | 200 | 240 | 3Ø, 4W | 200/3 | 12 | PLUG-IN | MB1515 |
| CUP4421H | 200 | 480 | 3Ø, 4W | 200/3 | 18 | BOLT-ON | MB2015 |

*3Ø, 3W systems also available*





Data subject to change without notice. Consult local utility for area acceptance. All dimensions in inches.