




## GAR1526, Mechanical Grounding Connector, Cable to Rod or Pipe

By Burndy  
Catalog # [GAR1526](#)

Mechanical Grounding Connector, Cable to Rod or Pipe, 4 AWG (Sol.) - 2/0 AWG (Str.), #9 - #10 Rebar, 1-1/8" to 1-1/4" Rod, 1" Pipe, Bright Dipped

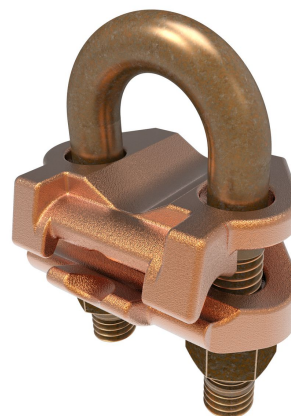

### Features

- Parallel or 90° Copper Cable Connection
- One-wrench installation
- Rated for Direct Burial in earth or concrete

### Application

For Joining A Range Of Cable, Parallel Or At Right Angles To Rod Or Tube Fence Posts, Direct Burial Applications

### Specifications

Buy American Compliant	Contact Manufacturer
Certification - cULus	No
EU RoHS Indicator	Yes
Certification - UL Recognized	No
Industry Standard(s)	UL467
Certification - ETL	No
Standards - Industry Standards Met	UL467
Standards - RoHS Compliance Status	EX
Certification - CSA Approved	No
UL Listed	Yes
Certification - UL Listed Direct Burial	Yes

### Conductor

Conductor - Pipe or Round Tube Size Range	1 in
Conductor - Rebar Size	<ul style="list-style-type: none"> <li>• 9</li> <li>• 10</li> </ul>
Conductor - Rebar Size Range	9 -10
Conductor - Rod Size	1.120-1.31 in
Conductor - Copper Str Size	2/0 AWG
Conductor - Rod Size Range	1 1/8 in-1 1/4 in
Conductor - Copper Solid Size	4 AWG
Conductor - Copper Solid Size Range	4 AWG-2/0 AWG
Conductor - Copper Str Size Range	4 AWG - 2/0 AWG
Conductor Type	<ul style="list-style-type: none"> <li>• CU C Solid-Size</li> <li>• CU C Str-Size</li> <li>• CU Tube Std-Size</li> <li>• Rod-Size</li> </ul>

Conductor - Copper Tube Std Size	1 IPS IPS
Conductor - Copper Tube Std Size Range	1 IPS IPS

### Dimensions

Dimension - Outside Diameter inch	1.31 in
Dimension - L Length Overall mm	40 mm
Dimension - Height fraction	2-7/8 in
Dimension - Height inch	2.88 in
Dimension - Height mm	73.2 mm
Dimension - Width fraction	2-5/8 in
Dimension - Width inch	2.62 in
Dimension - Width mm	67 mm
Dimension - B Length inch	1.75 in
Dimension - Length Overall inch	1.56 in

### Force Related

Installation Torque Recommended in-lb	240 LBS/in
Installation Torque Recommended Run in-lb	240 Lb in

### General

Material - Hardware	DURIUM™ Silicon Bronze
Sub Brand	MECHANICAL CONNECTOR
Plated	N
Type	GAR
U Bolt Type	244
UPC 12 Digit	781810232606
UPC 14 Digit GTIN	00781810232606
Material	Copper
Plating Type	Bright Dipped
UPC	781810232606

### Logistics

Minimum Pack Quantity	1
Carton Quantity	20
Pallet Quantity	1800



A Hubbell brand