


YAZV4CTC38FX, Compression Terminal, 4 Flex G,H,I,K,M, DLO, 4 AWG Cu, 1-Hole, 3/8" Stud, Long Barrel

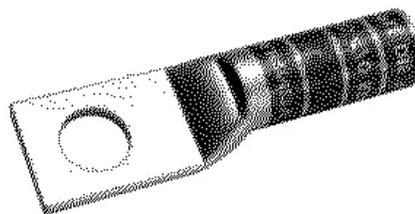

By Burndy
Catalog # [YAZV4CTC38FX](#)

4 Flex G,H,I,K,M,DLO, 4 AWG CU, One Hole, 3/8 Stud Size, Long Barrel, Internal Chamfer, Tin Plated, UL/CSA, 90°C, Up to 35kV, Gray Color Code, 8 or 346 Die Index.

Features

- Barrel is designed with an internal chamfer at the wire entry to ensure smooth insertion of the wire, preventing possible damaging of the strands
- Electro-tin plated unless otherwise specified to reduce galvanic corrosion (bimetallic) and resist corrosive elements
- Connectors are clearly marked with stamping and barrel color coding

Application

Wire Termination

General

Catalog Number	YAZV4CTC38FX
Color Code	Gray
Connector Type	LONG BARREL
Die Index	8
Feature - Barrel Style	Skived
Feature - Barrel Type	Long
Finish Type	Tin-Plated
Material	COPPER
Physical Attribute - Number of Holes	1
Plated	Y
Plating Type	Tin
Trade Name	HYLUG™
Type	Long Barrel, Skive
UPC	781810241226
UPC 14 Digit GTIN	00781810241226

Dimensions

Dimension - B Length fraction	1-1/4 in
Dimension - B Length inch	1.25 in
Dimension - Bolt Hole Size inch	0.39 in
Dimension - Bolt Size fraction	3/8
Dimension - Bolt Size inch	0.38
Dimension - Hole Size fraction	3/8
Dimension - Hole Size inch	0.41
Dimension - Hole Size mm	10.4 mm

Dimension - L Length Overall mm	61 mm
Dimension - Length Overall inch	2.42 in
Dimension - N inch	0.41 in
Dimension - Outside Diameter inch	0.38 in
Dimension - Pad Width inch	0.58 in
Dimension - Strip Length inch	1-5/16
Dimension - Stud Size fraction	3/8
Dimension - Stud Size inch	3/8
Dimension - Z (inch)	0.42 in
Physical Attribute - Tongue Angle	Straight

Electrical Ratings

Voltage - Maximum	35000
Voltage Rating	35 kV

Conductor Related

Conductor - Copper DLO Size	4 AWG
Conductor - Copper DLO Size Range	4 AWG
Conductor - Copper Flex G Size	"4 AWG"
Conductor - Copper Flex G Size Range	4 AWG
Conductor - Copper Flex H Size	"4 AWG"
Conductor - Copper Flex H Size Range	4 AWG
Conductor - Copper Flex I Size	"4 AWG"
Conductor - Copper Flex I Size Range	4 AWG
Conductor - Copper Flex K Size	"4 AWG"
Conductor - Copper Flex K Size Range	4 AWG
Conductor - Copper Flex M Size	"4 AWG"
Conductor - Copper Flex M Size Range	4 AWG

Conductor - Copper Str Compact Size	"4 AWG"
Conductor - Copper Str Navy Size	40
Conductor - Copper Str Size	"4 AWG"
Conductor - Copper Str Size Range	4 AWG
Conductor - CopperWeld Str Size	4 A AWG;4 D AWG;4 N AWG;4 P AWG
Conductor - CopperWeld Str Size Range	4 A AWG-4 P AWG
Conductor - Material	COPPER
Conductor Size	4 AWG
Conductor Type	CODE/FLEX
Wire Size	4 AWG

Certifications And Compliance

Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Industry Standard(s)	UL 486A-486B

Standards - RoHS Compliance Status	CM
UL Listed	Yes

Logistics

Carton Quantity	50
Minimum Pack Quantity	1

Product Assets

- [Catalogs - BURNDY Master Catalog - Section C - Compression Connections](#)
- [Catalogs - BURNDY Master Catalog - Full Line BURNDY Catalog](#)
- [Customer Notices - Prop 65 Notice](#)
- [Installation Manuals - Copper Flex Long Terminals Tooling and Installation Instructions](#)
- [Installation Manuals - Medium & Large HYDENT Copper & Aluminum Terminal Crimp Instructions with 750 Series 12-Ton Tool](#)
- [Interactive Catalog - BURNDY Full-Line Digital Catalog](#)
- [Sales Drawings - SE..212448-03](#)
- [Specifications - YAZV4CTC38FX](#)
- [Video - HYDENT Compression Terminal Overview Video](#)

