




# YCS321R, Aluminum Sleeve, Staked Cable Stop

By Burndy  
Catalog # [YCS321R](#)

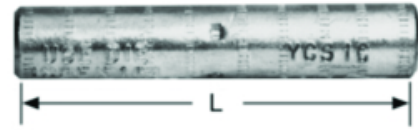

HYSPLICE AL sleeve with staked cable stop, designed to withstand jumper loop tensile and vibration stresses. ANSI C119.4 CLASS 2 (PARTIAL TENSION), 6-1/2 IN L.

## Application

For ACSR, All Aluminum, 6201, 5005 And Compressed Conductors

## General

Catalog Number	YCS321R
Connector Type	Splice
Die Index	490
EU RoHS Indicator	Yes
Material	Aluminum
Plated	N
Plating Type	Unplated
Prefilled Oxide Inhibitor	Y
Sub Brand	HYSPLICE
Trade Name	HYSPLICE™
Type	YCS-R
UPC	781810820551
UPC 12 Digit	7818108205511

## Dimensions

Dimension - B Length fraction	3-18/25 in
Dimension - B Length inch	3.18 in
Dimension - L Length Overall mm	164 mm
Dimension - Length Overall inch	6.47 in
Dimension - Outside Diameter inch	1.12 in

## Conductor Related

Conductor - ACSR Str Size	336.4 (18/1) Merlin kcmil
Conductor - AL Str Size	336.4 kcmil

## Certifications And Compliance

Certification - CSA Approved	No
Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Standards - RoHS Compliance Status	CM
UL Listed	No

## Logistics

Carton Quantity	25
Minimum Pack Quantity	25
Pallet Quantity	3600

## Product Assets

[Catalogs - Full Line BURNDY Catalog](#)  
[Catalogs - Section H - Overhead Distribution](#)  
[Customer Notices - Prop 65 Notice](#)  
[Product Cross Section Image\(s\) - BUR\\_YCS-R\\_LineArt](#)  
[Sales Drawings - 50115707](#)



A proud member of the Hubbell Family.

©2024 Hubbell Incorporated. All rights reserved.  
BRDY-YCS321R-SPEC-EN | REV 6/2024