


YH292C, Cu Compression H Tap, 250 kcmil-2 AWG Run, 2-14 AWG Tap

By Burndy
Catalog # [YH292C](#)

Copper Compression H Tap, 250 kcmil-2 AWG (Main), 2 AWG-14 AWG (Tap), Tin Plated

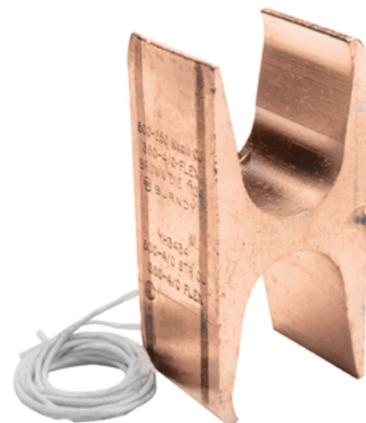

Features

- Uninsulated compression H-tap connector, tin-plated
- Designs with more than one tap wire groove require installers to utilize a minimum of one Main (Run) and one Tap groove, other grooves can be left empty
- 'Third Hand' is a string provided with the H-tap connector and is used to wrap the wire while being inserted into the run and tap grooves
- H-tap connectors can be purchased separately or kitted with covers
- YH is connector sold separately without cover
- YH-WC is kitted H-tap connector and black cover
- YH-WCC is kitted H-tap connector and clear cover

Application

Wire Tap

Specifications

| | |
|------------------------------------|----------------------|
| Buy American Compliant | Contact Manufacturer |
| Certification - cULus | No |
| EU RoHS Indicator | Yes |
| Certification - UL Recognized | No |
| Industry Standard(s) | UL 486A-486B |
| Certification - ETL | No |
| Standards - Industry Standards Met | UL467 |
| Standards - RoHS Compliance Status | CM |
| Certification - CSA Approved | Yes |
| UL Listed | Yes |

Conductor

| | |
|-------------------------------------|---|
| Conductor - Material | COPPER |
| Conductor - Copper Flex I Tap | 8;7;6;5;4;3;2 |
| Conductor - Copper Flex I Tap Range | 2 AWG-8 AWG |
| Conductor - Copper Flex K Run | 2 AWG;1 AWG;1/0 AWG;2/0 AWG;3/0 AWG;4/0 AWG |
| Conductor - Copper Flex K Run Range | 2 AWG-4/0 AWG |
| Conductor - Copper Flex K Tap | 8;7;6;5;4;3;2 |
| Conductor - Copper Flex M Run | 2 AWG;1 AWG;1/0 AWG;2/0 AWG;3/0 AWG;4/0 AWG |
| Conductor - Copper Flex M Run Range | 2 AWG-4/0 AWG |

| | |
|-------------------------------------|---|
| Conductor - Copper Flex M Tap | 8;7;6;5;4;3;2 |
| Conductor - Copper Solid Tap | 6;5;4;3;2 |
| Conductor - Copper Flex G Run | 2 AWG;1 AWG;1/0 AWG;2/0 AWG;3/0 AWG;4/0 AWG |
| Conductor - Copper Flex G Run Range | 2 AWG-4/0 AWG |
| Conductor - Copper Str Run | 2 AWG;1 AWG;1/0 ;2/0 AWG;3/0 AWG;4/0 AWG;250 kcmil |
| Conductor - Copper Str Run Range | 250 KCMIL-2 AWG |
| Conductor - Copper Flex H Run | 8 AWG;7 AWG;6 AWG;5 AWG;4 AWG;3 AWG;2 AWG;1 AWG;1/0 AWG;2/0 AWG;3/0 AWG;4/0 AWG |
| Conductor - Copper Flex H Run Range | 8 AWG-4/0 AWG |
| Conductor - Copper Str Tap | 2 AWG-6 AWG |
| Conductor Type | CODE/FLEX |
| Conductor - Copper Flex I Run | 4/0 AWG-2 AWG |
| Conductor - Copper Flex I Run Range | 2 AWG-4/0 AWG |

Configuration

| | |
|----------------|-------|
| Connector Type | H-TAP |
|----------------|-------|

Current

| | |
|-------------------|-------|
| Voltage - Maximum | 35000 |
| Voltage Rating | 35 kV |

Dimensions

| | |
|---------------------------------|---------|
| Dimension - L Length Overall mm | 23 mm |
| Dimension - Height inch | 1.52 in |
| Dimension - Strip Length inch | 1-1/16 |
| Dimension - Width fraction | .90 in |
| Dimension - Width inch | 1.52 in |
| Dimension - Length Overall inch | 0.90 in |

General

| | |
|------------|----------|
| Die Index | 654 |
| Trade Name | CRIMPIT™ |
| Sub Brand | CRIMPIT |

| | | | |
|-------------------|----------------------|-----------------------|------|
| Color Code | Purple | Minimum Pack Quantity | 1 |
| Plated | Y | Carton Quantity | 60 |
| Type | Compression Taps | Pallet Quantity | 8640 |
| UPC 12 Digit | 781810013878 | | |
| UPC 14 Digit GTIN | 00781810013878 | | |
| Material | COPPER | | |
| Plating Type | Tin - Electro Plated | | |
| Finish Type | Tin-Plated | | |
| UPC | 781810013878 | | |

Operational

Temperature Rating 194

Product Assets

[Catalog \[English\]](#)

Logistics



A Hubbell brand

© 2025 Hubbell Incorporated. All rights reserved
BRDY-YH292C-SPEC-EN | REV 11/2025