


## YH2C2C, Cu Compression H Tap, 2-8 AWG Run and Tap

By Burndy  
Catalog # [YH2C2C](#)

Copper Compression H Tap, 2 AWG-8 AWG (Main), 2 AWG-8 AWG (Tap), Tin Plated

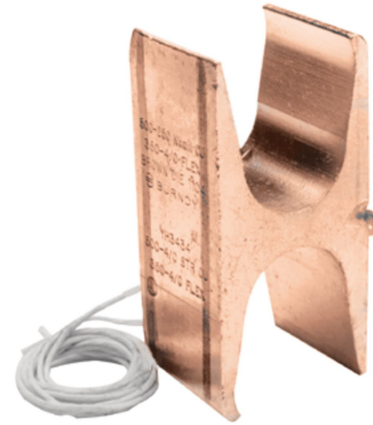

### Features

- Uninsulated compression H-tap connector, tin-plated
- Designs with more than one tap wire groove require installers to utilize a minimum of one Main (Run) and one Tap groove, other grooves can be left empty
- 'Third Hand' is a string provided with the H-tap connector and is used to wrap the wire while being inserted into the run and tap grooves
- H-tap connectors can be purchased separately or kitted with covers
- YH is connector sold separately without cover
- YH-WC is kitted H-tap connector and black cover
- YH-WCC is kitted H-tap connector and clear cover

### Application

Wire Tap

### Specifications

Buy American Compliant	No
Certification - cULus	No
EU RoHS Indicator	Yes
Certification - UL Recognized	No
Industry Standard(s)	UL 486A-486B
Certification - ETL	No
Standards - Industry Standards Met	UL467
Standards - RoHS Compliance Status	CM
Certification - CSA Approved	Yes
UL Listed	Yes

### Conductor

Conductor - Material	COPPER
Conductor - Copper Flex I Tap	8;7;6;5;4;3;2
Conductor - Copper Flex I Tap Range	2 AWG-8 AWG
Conductor - Copper Flex K Run	8 AWG;7 AWG;6 AWG;5 AWG;4 AWG;3 AWG;2 AWG
Conductor - Copper Flex K Run Range	8 AWG
Conductor - Copper Flex K Tap	8;7;6;5;4;3;2
Conductor - Copper Flex K Tap Range	8 AWG
Conductor - Copper Flex M Run	8 AWG;7 AWG;6 AWG;5 AWG;4 AWG;3 AWG;2 AWG

Conductor - Copper Flex M Run Range	8 AWG-2 AWG
Conductor - Copper Flex M Tap	8;7;6;5;4;3;2
Conductor - Copper Solid Run	6;5;4;3;2
Conductor - Copper Solid Tap	6;5;4;3;2
Conductor - Copper Flex G Run	8 AWG;7 AWG;6 AWG;5 AWG;4 AWG;3 AWG;2 AWG
Conductor - Copper Flex G Run Range	2 AWG-6 AWG
Conductor - Copper Str Run	2 AWG-6 AWG
Conductor - Copper Str Run Range	2 AWG-6 AWG
Conductor - Copper Flex G Tap	2 AWG-14 AWG
Conductor - Copper Flex G Tap Range	2 AWG-14 AWG
Conductor - Copper Flex H Run	8 AWG;7 AWG;6 AWG;5 AWG;4 AWG;3 AWG;2 AWG
Conductor - Copper Flex H Run Range	2 AWG-6 AWG
Conductor - Copper Str Tap	2 AWG-6 AWG
Conductor - Copper Str Tap Range	2 AWG-6 AWG
Conductor - Copper Flex H Tap	2 AWG-14 AWG
Conductor - Copper Flex H Tap Range	2 AWG-14 AWG
Conductor Type	CODE/FLEX
Conductor - Copper Flex I Run	2 AWG-8 AWG
Conductor - Copper Flex I Run Range	8 AWG-2 AWG

### Configuration

Connector Type	H-TAP
----------------	-------

### Current

Voltage - Maximum	35000
Voltage Rating	35 kV

### Dimensions

Dimension - L Length Overall	19 mm
Dimension - Height	inch 1.25
Dimension - Strip Length	inch 7/8
Dimension - Width	fraction .60
Dimension - Width	inch 1.25
Dimension - Length Overall	inch 0.75

### General

Die Index	C
-----------	---

Trade Name	CRIMPIT™
Sub Brand	CRIMPIT
Color Code	Brown
Plated	Y
Type	Compression Taps
UPC 12 Digit	781810013861
UPC 14 Digit GTIN	00781810013861
Material	COPPER
Plating Type	Tin - Electro Plated
Finish Type	Tin-Plated
UPC	781810013861

### Logistics

Minimum Pack Quantity	1
Carton Quantity	150
Pallet Quantity	13500

### Operational

Temperature Rating	194
--------------------	-----

### Product Assets

[Catalog \[English\]](#)



A Hubbell brand