


YH3429, Compression H-Tap

By Burndy

Catalog # [YH3429](#)

Copper Compression H Tap, 500 KCMIL-250 KCMIL (Main), 250 KCMIL-4/0 AWG(Tap), Tin Plated

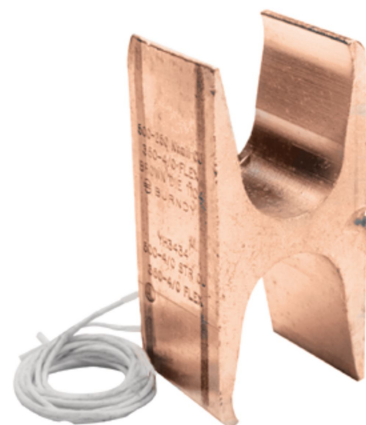

Features

- Uninsulated compression H-tap connector, tin-plated
- Designs with more than one tap wire groove require installers to utilize a minimum of one Main (Run) and one Tap groove, other grooves can be left empty
- 'Third Hand' is a string provided with the H-tap connector and is used to wrap the wire while being inserted into the run and tap grooves
- H-tap connectors can be purchased separately or kitted with covers
- YH is connector sold separately without cover
- YH-WC is kitted H-tap connector and black cover
- YH-WCC is kitted H-tap connector and clear cover

Application

Wire Tap

Specifications

Buy American Compliant	Contact Manufacturer
Certification - cULus	No
EU RoHS Indicator	Yes
Certification - UL Recognized	No
Industry Standard(s)	UL 486A-486B
Certification - ETL	No
Standards - Industry Standards Met	UL467
Standards - RoHS Compliance Status	CM
Certification - CSA Approved	Yes
UL Listed	Yes

Conductor

Conductor - Material	COPPER
Conductor - Copper Flex I Tap	1/0;2/0;3/0;4/0;250
Conductor - Copper Flex I Tap Range	4/0 AWG-1/0 AWG
Conductor - Copper Flex K Run	4/0 AWG;250 kcmil;300 kcmil;350 kcmil;400 kcmil;450 kcmil;500 kcmil
Conductor - Copper Flex K Run Range	4/0 AWG-500 kcmil
Conductor - Copper Flex K Tap	1/0;2/0;3/0;4/0;250
Conductor - Copper Flex K Tap Range	4/0 AWG

Conductor - Copper Flex M Run	4/0 AWG;250 kcmil;300 kcmil;350 kcmil;400 kcmil;450 kcmil;500 kcmil
Conductor - Copper Flex M Run Range	4/0 AWG-500 kcmil
Conductor - Copper Flex M Tap	1/0;2/0;3/0;4/0;250
Conductor - Copper Flex G Run	4/0 AWG;250 kcmil;300 kcmil;350 kcmil;400 kcmil;450 kcmil;500 kcmil
Conductor - Copper Flex G Run Range	4/0 AWG-500 kcmil
Conductor - Copper Str Run	4/0 AWG;250 kcmil;300 kcmil;350 kcmil;400 kcmil;450 kcmil;500 kcmil
Conductor - Copper Str Run Range	500 KCMIL-4/0 AWG
Conductor - Copper Flex H Run	8 AWG;7 AWG;6 AWG;5 AWG;4 AWG;3 AWG;2 AWG;1 AWG;1/0 AWG;2/0 AWG;3/0 AWG;4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex H Run Range	8 AWG-350 kcmil
Conductor - Copper Str Tap	1/0 ;2/0 AWG;3/0 AWG;4/0 AWG;250 kcmil
Conductor - Copper Str Tap Range	250 KCMIL-1/0 AWG
Conductor Type	CODE/FLEX
Conductor - Copper Flex I Run	350 KCMIL-4/0 AWG
Conductor - Copper Flex I Run Range	4/0 AWG-500 kcmil

Configuration

Connector Type	H-TAP
----------------	-------

Current

Voltage - Maximum	35000
Voltage Rating	35 kV

Dimensions

Dimension - L Length Overall	25 mm
Dimension - Height inch	2.23 in
Dimension - Strip Length inch	1-1/8
Dimension - Width fraction	1.31 in
Dimension - Width inch	2.23 in

Dimension - Length Overall
inch 1.00 in

Plating Type Tin - Electro Plated
Finish Type Tin-Plated
UPC 781810013892

General

Die Index 1104
Trade Name CRIMPIT™
Sub Brand CRIMPIT
Color Code Brown
Plated Y
Type Compression Taps
UPC 12 Digit 781810013892
UPC 14 Digit GTIN 00781810013892
Material COPPER

Logistics

Minimum Pack Quantity 1

Operational

Temperature Rating 194

Product Assets

[Catalog \[English\]](#)



A Hubbell brand