


YH3434, Compression H-Tap

By Burndy
Catalog # [YH3434](#)

Copper Compression H Tap, 500 KCMIL-250 KCMIL (Main), 500 KCMIL-4/0 AWG(Tap), Tin Plated

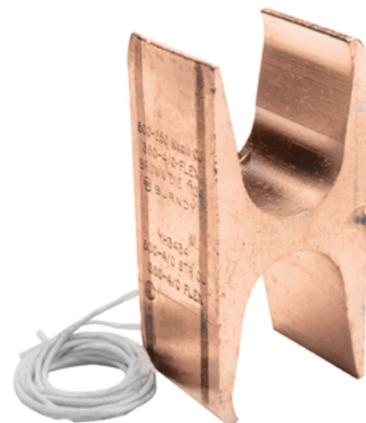

Features

- Uninsulated compression H-tap connector, tin-plated
- Designs with more than one tap wire groove require installers to utilize a minimum of one Main (Run) and one Tap groove, other grooves can be left empty
- 'Third Hand' is a string provided with the H-tap connector and is used to wrap the wire while being inserted into the run and tap grooves
- H-tap connectors can be purchased separately or kitted with covers
- YH is connector sold separately without cover
- YH-WC is kitted H-tap connector and black cover
- YH-WCC is kitted H-tap connector and clear cover

Application

Wire Tap

Specifications

Buy American Compliant	No
Certification - cULus	No
EU RoHS Indicator	Yes
Certification - UL Recognized	No
Industry Standard(s)	UL 486A-486B
Certification - ETL	No
Standards - Industry Standards Met	UL467
Standards - RoHS Compliance Status	CM
Certification - CSA Approved	Yes
UL Listed	Yes

Conductor

Conductor - Material	COPPER
Conductor - Copper Flex I Tap	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex I Tap Range	350 KCMIL-4/0 AWG
Conductor - Copper Flex K Run	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex K Run Range	4/0 AWG-350 kcmil
Conductor - Copper Flex K Tap	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex K Tap Range	4/0 AWG-350 kcmil

Conductor - Copper Flex M Run	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex M Run Range	4/0 AWG-350 kcmil
Conductor - Copper Flex M Tap	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex M Tap Range	4/0 AWG-350 kcmil
Conductor - Copper Flex G Run	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex G Run Range	4/0 AWG-350 kcmil
Conductor - Copper Str Run	250 kcmil;300 kcmil;350 kcmil;400 kcmil;450 kcmil;500 kcmil
Conductor - Copper Flex G Tap	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Str Run Range	500 KCMIL-250 KCMIL
Conductor - Copper Flex G Tap Range	4/0 AWG-350 kcmil
Conductor - Copper Flex H Run	350 kcmil
Conductor - Copper Flex H Run Range	350 kcmil
Conductor - Copper Str Tap	4/0 AWG;250 kcmil;300 kcmil;350 kcmil;400 kcmil;450 kcmil;500 kcmil
Conductor - Copper Str Tap Range	500 KCMIL-4/0 AWG
Conductor - Copper Flex H Tap	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex H Tap Range	4/0 AWG-350 kcmil
Conductor Type	CODE/FLEX
Conductor - Copper Flex I Run	350 KCMIL-4/0 AWG
Conductor - Copper Flex I Run Range	4/0 AWG-350 kcmil

Configuration

Connector Type	H-TAP
----------------	-------

Current

Voltage - Maximum	35000
Voltage Rating	35 kV

Dimensions

Dimension - L Length Overall 25 mm
mm
Dimension - Height inch 2.43 in
Dimension - Strip Length inch 1-1/8
Dimension - Width fraction 1.15 in
Dimension - Width inch 2.43 in
Dimension - Length Overall 1.00 in
inch

General

Die Index 1104
Trade Name CRIMPIT™
Sub Brand CRIMPIT
Color Code Brown
Plated Y
Type Compression Taps

UPC 12 Digit 781810144213
UPC 14 Digit GTIN 00781810144213
Material COPPER
Plating Type Tin - Electro Plated
Finish Type Tin-Plated
UPC 781810144213

Logistics

Minimum Pack Quantity 1

Operational

Temperature Rating 194

Product Assets

[Catalog \[English\]](#)



A Hubbell brand