

Features:

- Manufactured in type 316 stainless steel for increased corrosion resistance
- Excellent strength and durability
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Approved for damp locations when used with Calbrite’s Coated flex conduit
- Neoprene O-ring and type 316 stainless steel locknut included
- NPT threads
- No package quantity required

Certifications and Compliances:


- NEMA 4X approved

Temperature Ratings

- Stainless steel body - approx. 1700°F
- Internal insulated throat (gray) - approx. 350°F
- Internal plastic ferrule (white) - approx. 450°F
- Neoprene O-ring - approx. 600°F

Applications:

Used to connect Calbrite stainless flexible conduit to other fittings at 90°. Assists in preventing contamination of oils, dirt, dust, and liquid when used with Calbrite PVC coated stainless flexible conduit. Flexible stainless steel conduit can be used for protecting electronic and electrical wires and cable. Suitable for corrosive environments, including pumps, motors, HVAC systems, machine tools, electrical housings and cabinetry.

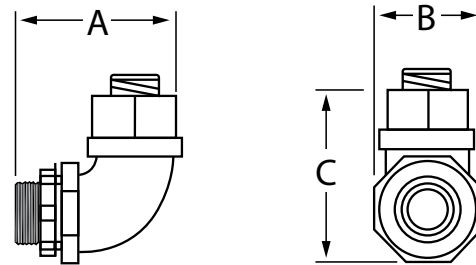

Part Number	Trade Size	A	B	C	Weight per each
	in	in	in	in	lb
S60500FC90	½	1.880	1.250	1.950	0.27
S60700FC90	¾	2.300	1.520	2.290	0.50
S61000FC90	1	2.850	1.800	2.850	0.70
S61200FC90	1 ¼	3.150	2.250	3.150	0.92
S61500FC90	1 ½	3.800	2.650	3.750	1.55
S62000FC90	2	4.320	3.210	4.500	2.30
S62500FC90	2 ½	5.030	3.370	5.100	2.57
S63000FC90	3	6.200	3.580	6.240	4.39
S64000FC90	4	7.150	5.010	7.150	6.27

All dimensions are for informational purposes only *Tolerances +/- 5%