

Features

- Manufactured in type 316 stainless steel for increased corrosion resistance
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Set screw provides fixed alignment and positive ground continuity
- Allows easy insertion of grounding conductor for thru or end connection
- No package quantity required

Certifications and Compliances


- UL 467 / CSA C22-41 Listed
(Standard for Grounding and Bonding Equipment)
- UL 514B / CSA C22.2-18.3 Listed
(Standard for Conduit, Tubing and Cable Fittings)
- UL 486A-486B / CSA C22.2-65-13 Listed
(Standard for Safety for Wire Connectors)
- UL File # E352416

Applications

For use on stainless steel Rigid or threaded IMC conduit, to provide a means of grounding conduit through a bushing.

Domestic Ordering

Part numbers marked with an * are also available domestically to meet the Made in America standards. To order the domestic version, add -DOM to the end of the part number.

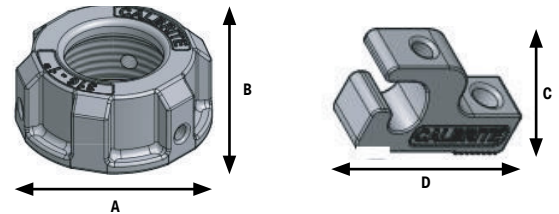

Part Number	Trade Size (in)	A (in)	B (in)	C (in)	D (in)	Ground Screw (in)	Weight per each (lb)	Lug Size (in)
S60700GB00*	¾	0.732	1.560	1.313	0.850	10-24 X ¾	0.270	¾" - ¼"
S61000GB00*	1	0.824	1.900	1.313	0.850	10-24 X ¾	0.380	1" - ¼"
S61500GB00*	1 ½	0.840	2.440	1.313	0.850	10-24 X ¾	0.480	1 ½" - ¼"

All dimensions are for informational purposes only *Tolerances +/- 5%

