


PART NUMBER	SIZE	"R"	"□"	"H"	"S" MIN	"B" MIN	"L"
XXXXXXX	½"	24"	17"	7"	1 ½"	N/A	18 ⅞"
XXXXXXX	¾"	24"	17"	7"	1 ½"	N/A	18 ⅞"
5136500	1"	24"	17"	7"	1 ⅞"	N/A	18 ⅞"
5136512	1 ¼"	24"	17"	7"	2"	N/A	18 ⅞"
5163533	1 ½"	24"	17"	7"	2"	N/A	18 ⅞"
5121101	2"	24"	17"	7"	2"	N/A	18 ⅞"
5121943	2 ½"	24"	17"	7"	3"	N/A	18 ⅞"
XXXXXXX	3"	24"	17"	7"	3 ⅛"	N/A	18 ⅞"
XXXXXXX	3 ½"	24"	17"	7"	3 ¼"	N/A	18 ⅞"
5121089	4"	24"	17"	7"	3 ⅜"	N/A	18 ⅞"
XXXXXXX	5"	N/A	N/A	N/A	3 ⅝"	N/A	N/A
XXXXXXX	6"	N/A	N/A	N/A	3 ¾"	N/A	N/A
XXXXXXX	8"	N/A	N/A	N/A	6 ⅝"	N/A	N/A



UL Listed UL651
 UL File # E34052
 UL Category Code DZYR
 UL Control Number 41UM
 Meets NEMA TC3
 See NEC Article 352 for use
 Material is Rigid PVC
 Bend Tolerance is $\pm 2^\circ$

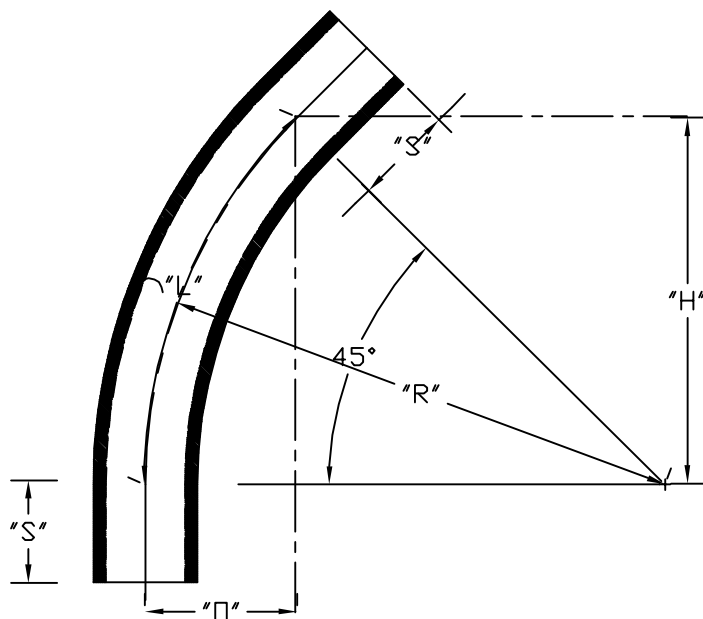

CANTEX
 INC.
 Fort Worth, TEXAS

45° Elbows, Plain End
 Schedule 80 24" Radius Elbows

Drawn By: CD Branch

Date: 10/15/07

Ref.