

Flexible metallic conduit fittings

Set screw & duplex type – zinc die cast

SET SCREW TYPE – ZINC DIE CAST

UL File No. E-19188



Cat. #	Trade size	Desc.	Cable opening		Unit qty.	Wt. lbs. per 100
			Max.	Min.		
BX38R	3/8"	Round	0.600	0.460	50	5

SET SCREW TYPE – ZINC DIE CAST


UL File No. E-19188



Cat. #	Trade size	Cable opening		Unit qty.	Wt. lbs. per 100
		Max.	Min.		
ACB38DC ② ①	3/8"	0.610	0.469	50	9
ACB50DC ② ①	1/2"	0.610	0.469	25	10
ACB75DC	3/4"	0.986 ③	0.819 ④	20	13
ACB100DC	1"	1.130 ⑤	1.130 ⑤	10	17

② UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
 MCAP™ is a registered trademark of Southwire Company.
 ③ Tested with AC cable only.
 ④ UL approved for use with MC-PCS cable.

Dimensions (in inches):

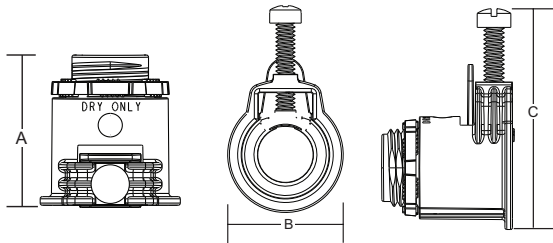

Cat. #	A	B	C
ACB38DC	0.969	1.094	1.828
ACB50DC	1.377	1.299	2.322
ACB75DC	1.464	1.476	2.559
ACB100DC	1.699	1.759	3.267

DUPLEX TYPE – ZINC DIE CAST

UL File No. E-19188



Cat. #	Trade size	Dia. of opening for cable	Dia. of bushed hole	Unit qty.	Wt. lbs. per 100
2699 ④ ①	3/8"	5/8"	3/16"	25	13

④ UL Listed as grounding means.
 ① UL approved for use with MC-PCS cable.

SET SCREW FLEX CONNECTOR – ZINC DIE CAST

Angled set screw

UL File No. E-19189



Cat. #	Trade size	Unit qty.	Wt. lbs. per 100
702DC	1/2"	25	23
703DC	3/4"	25	35

FMC fittings

Flexible metallic conduit fittings

Screw-in type – zinc die cast

SCREW-IN TYPE – ZINC DIE CAST

Straight connectors – insulated

UL File No. E-19189



Cat. #	Trade size	Unit qty.	Wt. lbs. per 100
1770DC	3/8"	80	5
1771DC	1/2"	60	5
1772DC	3/4"	35	9
1773DC	1"	15	13
1774DC	1 1/4"	10	24
1775DC	1 1/2"	6	35
1776DC	2"	3	52

Straight connectors – non-insulated

UL File No. E-19189



Cat. #	Trade size	Unit qty.	Wt. lbs. per 100
770DC	3/8"	80	5
771DC	1/2"	60	5
772DC	3/4"	35	9
773DC	1"	15	13
774DC	1 1/4"	10	24
775DC	1 1/2"	6	35
776DC	2"	3	52

Couplings

UL File No. 19189



Cat. #	Trade size	Unit qty.	Wt. lbs. per 100
791DC	1/2"	40	4
792DC	3/4"	25	8
793DC	1"	15	12
794DC	1 1/4"	10	21
795DC	1 1/2"	6	31
796DC	2"	3	44