


AC/MC fittings

Set screw & duplex type – zinc die cast & malleable iron

SET SCREW TYPE – ZINC DIE CAST

UL File No. E-19188



BX38

BX38R



Cat. #	Trade size	Desc.	Cable opening		Unit qty.	Wt. lbs. per 100
			Max.	Min.		
BX38	3/8"	Oval	0.610	0.469	50	5
BX38R	3/8"	Round	0.600	0.460	50	5

SET SCREW TYPE – ZINC DIE CAST

UL File Nos. E-19188, E-19189



ACMF38

ACB38DC




Cat. #	Trade size	Cable opening		Unit qty.	Wt. Lbs. Per 100
		Max.	Min.		
ACMF38 ²	3/8"	0.610	0.469	100	25
ACB38DC ² ¹	3/8"	0.610	0.469	50	9
ACB50DC ² ¹	1/2"	0.610	0.469	25	10
ACB75DC	3/4"	0.986 ³	0.819 ³	20	13
ACB100DC	1"	1.130 ³	1.130 ³	10	17

² UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™). MCAP™ is a registered trademark of Southwire company.

³ Tested with AC cable only.

¹ UL approved for use with MC-PCS cable.

Dimensions (in inches):

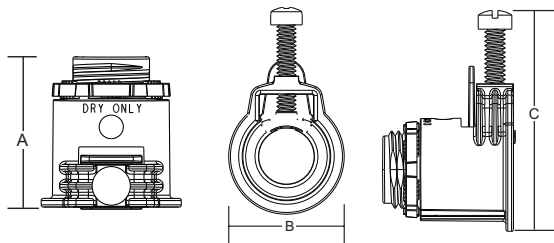

Cat. #	A	B	C
ACB38DC	0.969	1.094	1.828
ACB50DC	1.377	1.299	2.322
ACB75DC	1.464	1.476	2.559
ACB100DC	1.699	1.759	3.267

DUPLEX TYPE° – ZINC DIE CAST

UL File No. E-19188



Cat. #	Trade size	Dia. of opening for cable	Dia. of bushed hole	Unit qty.	Wt. lbs. per 100
2699 ² ¹	3/8"	5/8"	7/16"	25	13

² UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™). MCAP™ is a registered trademark of Southwire company.

¹ UL Listed as grounding means.

¹ UL approved for use with MC-PCS cable.

SET SCREW TYPE – MALLEABLE IRON

UL File No. E-19188



Cat. #	Trade size	Dia. of opening for cable	Dia. of bushed hole	Unit qty.	Wt. lbs. per 100
702V	3/8"	5/8"	7/16"	100	7
For 2 conductor Nos. 14, 12					
3 conductor Nos. 14, 12					
4 conductor No. 14, 5/16" flex					

DUPLEX TYPE – MALLEABLE IRON

UL File No. E-19188



Cat. #	Trade size	Dia. of opening for cable	Dia. of bushed hole	Unit qty.	Wt. lbs. per 100
Straight					
699 ⁴	3/8"	5/8"	7/16"	25	20
90 Degree					
700 ⁴	3/8"	5/8"	7/16"	25	14

⁴ UL Listed as grounding means.