

All Copper Alloy Ground Connectors

Specification Grade

Type ABG

Use:

For cable connection parallel or at right angles to pipe or rod.

Features:

- A high strength corrosion-resistant copper alloy ground connector connecting a ground wire either parallel or at right angles to a ground rod or pipe.
- A positive ground is assured by the clamping pressure that can be applied by the high strength silicon bronze U-bolt, nuts and lock washers.
- Type ABG connectors are suitable for direct burial.
- For ground pipe larger than 1½" use Type CG Ground Connector shown on Page MA7.

Third Party Certification:

 UL Listed: E-24264




CSA Certified: 015978

Applicable Third Party Standards:

UL Standard: 467

CSA Standard: C22.2 No. 41

NEMA: FB-1

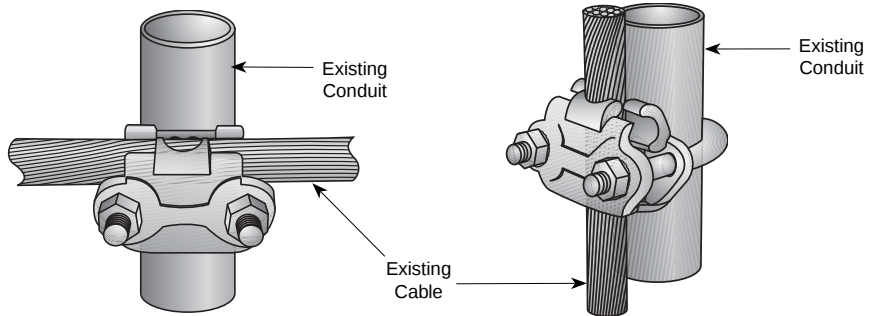

Type ABG at Right Angles

Type ABG Parallel

Catalog Number	Driven Ground Rod Size	In. Ground Pipe Size	Conductor Range AWG/kcmil		Dimensions in Inches			
			Min.	Max.	L	W	U	B
ABG-0204	½	¼	8	4	1⅞	1⅞	2	⅝
ABG-0222	½	¼	4	2/0	1⅞	1½	2¼	⅝
ABG-0304	⅝ or ¾	⅝	8	4	2	1⅞	2⅝	⅝
ABG-0322	⅝ or ¾	⅝	4	2/0	2	1½	2⅝	⅝
ABG-0325	⅝ or ¾	⅝	2/0	250	2	1⅞	2⅝	⅝
ABG-0350	⅝ or ¾	⅝	300	500	2½	2⅞	3⅝	⅝
ABG-0704	1	½ or ¾	8	4	2¼	1⅞	2½	⅝
ABG-0722	1	½ or ¾	4	2/0	2¼	1½	2¼	⅝
ABG-0725	1	½ or ¾	2/0	250	2¼	1⅞	3	⅝
ABG-0750	1	½ or ¾	300	500	2¼	2⅞	3½	⅝
ABG-1104	--	1	8	4	2⅞	1⅞	2¼	⅝
ABG-1122	--	1	4	2/0	2⅞	1½	3	⅝
ABG-1125	---	1	2/0	250	2⅞	1⅞	3⅝	⅝
ABG-1150	--	1	300	500	3	2⅞	3¼	⅝
ABG-1204	--	1¼	8	4	3	1⅞	3¼	⅝
ABG-1222	--	1¼	4	2/0	3	1½	3¼	⅝
ABG-1225	--	1¼	2/0	250	3	1⅞	3½	⅝
ABG-1250	---	1¼	300	500	3⅞	2⅞	4⅞	⅝
ABG-1504	--	1½	8	4	3⅞	1⅞	3½	⅝
ABG-1522	--	1½	4	2/0	3⅞	1½	3⅞	⅝
ABG-1525	--	1½	2/0	250	3⅞	1⅞	3¼	⅝
ABG-1550	--	1½	300	500	3⅞	2⅞	4¼	⅝

