



ERIFLEX

FLEXIBLE CONDUCTORS

SOLUTIONS TO OPTIMIZE THE DESIGN OF ELECTRICAL POWER & EARTH/GROUND CONNECTIONS

TABLE OF CONTENTS

- Flexible conductors for various applications.....06
- Certificates & ERIFLEX software.....08
- Product overview.....09
- ERIFLEX FLEXIBAR Insulated flexible busbar.....10
- Accessories22
- Hydraulic and manual tools for busbar & ERIFLEX FLEXIBAR.....26
- Insulated braided conductor (IBS, IBSB, IBSBR & IBSHY).....28
- Earth/ground copper braids (MBJ & BJ).....38
- Earth/ground stainless steel braids (CPI & CPIW).....40
- Power shunt (PBC & PPS)44
- Flat copper & stainless steel braids in coils (FTCB, FRCB, FSSB & FTCBI).....46
- Round and tubular copper braids in coils (RTCBI, RTCB, RRCB, RRCBI & TTCE.....48
- Make your own braided connections.....49
- Made-to-order solutions.....50
- Cross reference list52

FLEXIBLE CONDUCTORS FOR LOW-VOLTAGE INDUSTRIES

PENTAIR OFFERS

- A strong worldwide expertise in different markets
- A worldwide team of experts in electrical power connections
- Global solutions manufacturing
- Complete range of high-quality, reliable, certified products
- Innovative and compatible product solutions

ENERGY

- Electrical Power Generators and Distribution
 - Transformers
 - Generators
- Renewable Energies
 - Windmills
 - Solar
 - Hydropower
- Oil, Gas and Petrochemical
- Telecom
- Power Stations



TRANSPORTATION

- Marine
- Aircraft
- Ground Transportation
- Automotive





INDUSTRY & BUILDINGS

- Air Conditioning
- Elevators, Escalators & Automatic Doors



PANELBOARD

- Power
- Control & Command Applications:
 - Power Switchboards
 - Distribution Panel
 - UPS
 - Power Factor Correction



MACHINERY

- Tunneling
- Crushers
- Printing
- Welding
- Packaging
- Woodworking




FLEXIBLE CONDUCTORS FOR VARIOUS APPLICATIONS


Pentair is well-known for producing high quality flexible conductors for low voltage power connections. Flexible conductors made out of braids or laminates are used in a variety of applications for current transfer or grounding/earthing connections.




Worldwide certifications, applications and product availability

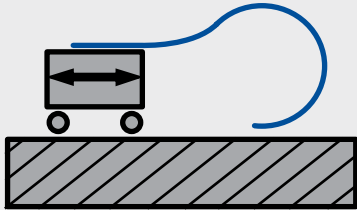


Flexible connection between fixed and moving parts

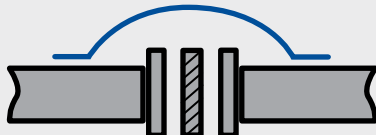


Earthing/grounding interconnection
(Example: pipeline)




Earthing/grounding connection with excellent electro-magnetic compatibility




Busbar and active electrical component connection (Example: circuit breaker, contactor) including most compact components on the market




Outdoor/offshore application or difficult environment (Example: abrasion, corrosion, UV...)

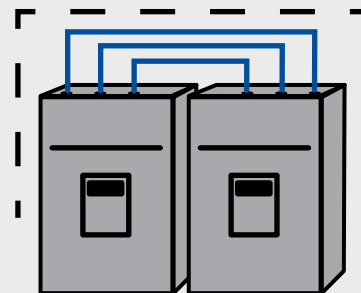


Short and compact connection between electrical components for volume reduction

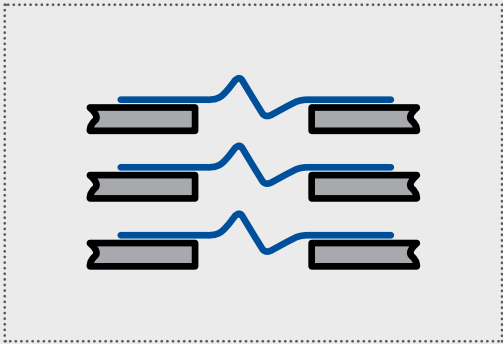


Expansion connections for busbar systems

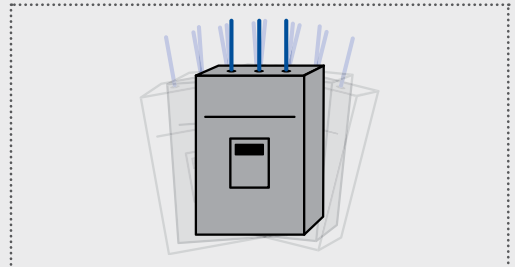


Vibration and reliability solution for connection

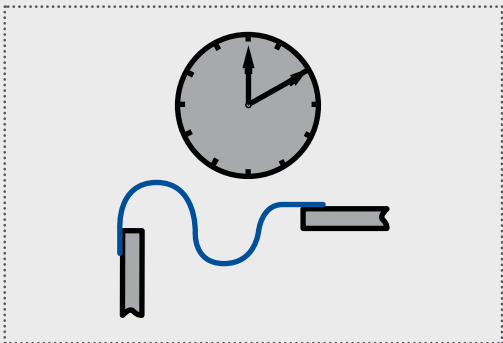


Reduce time assembly or maintenance connection

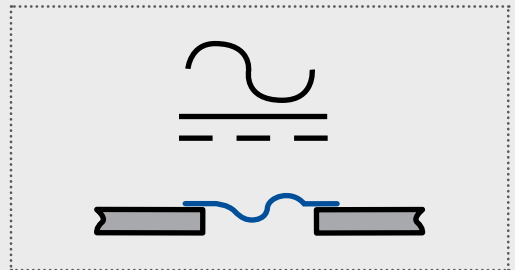


Connection for alternating current or direct current application

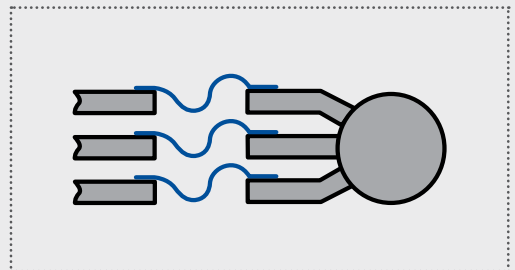

Motor, generator or transformer connection with busbar system

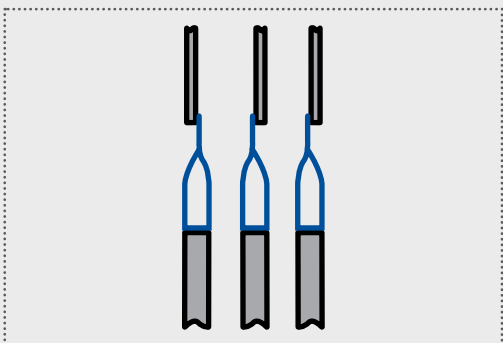

Power connection between horizontal and vertical system

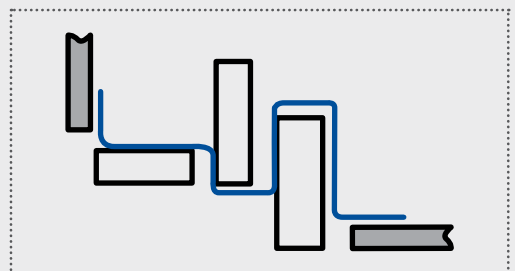


Connection everywhere

CERTIFICATES & ERIFLEX SOFTWARE

TESTS & CERTIFICATES

ERIFLEX components are compliant with several agencies and standards to meet all requirements

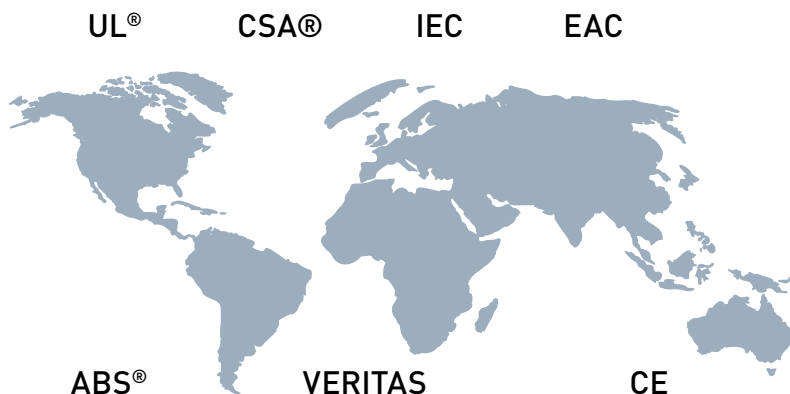

DEDICATED ERIFLEX SOFTWARE AVAILABLE

Pentair has designed an interactive software that allows drawing your technical panel layout with all components and relevant information on them.

The software is developed according to the new IEC 61439-1 standard. Inside, you will discover : updated pricing, products information and project calculator.

Whether you're interested in making a complete low-voltage busbar system, a distribution kit, or if you need to determine a flexible connection with ERIFLEX FLEXIBAR, you can trust ERIFLEX software to help simplify the process.

In fact, the software will provide you with technical and commercial datasheets dedicated to your project.

For more information or to request your personal login information, contact your local Pentair representative or visit <http://eriflex-configurator.pentair.com>



International Electrotechnical Commission
IEC 60439.1 Standard
IEC 61439.1 Standard



Underwriters Laboratories
UL Recognized, File No. E125470
UL Recognized, File No. E220029
UL Recognized, File No. E316390



UL Listed, File No. E220029



Canadian Standards Association
CSA Certified, File No. LL 90005
CSA Certified, file No 700 443 70



ABS American Bureau of Shipping
Certificate No. 08-HS365878-1-PDA-DUP &
Certificate No. 13-HS1018106-1-PDA-DUP
Marine & Offshore Applications



European Conformity



Bureau VERITAS
Certificate No. 02859 / D0 BV for
shipboard use



EAC
Certificate compliance for Russia



RoHS Compliant



Halogen-free materials

A COMPLETE SOLUTION FOR :


- Optimal design
- Standard compliance
- Cost effective
- Quality environment

<http://eriflex-configurator.pentair.com>

ERIFLEX



PRODUCT OVERVIEW

PRODUCT RANGE	TYPICAL USES	TYPICAL MARKET
ERIFLEX FLEXIBAR : ADVANCED ,STANDARD, SUMMUM 	• Heavy-duty power interconnection • Overcome vibration/alignment problems • Circuit breaker, generator & prefabricated power network conductor • Expansion joints • Variable terminating positions • Machine connections • Movable connection from massive busbar system • Alternative to large & multiple cables • Alternative to rigid busbar	• Switchgear & control equipment • Transport • Electrical equipment manufacturers • Power generation • Machinery manufacturer
Insulated braided conductor (IBS, IBSB, IBSBR & IBSHY) 	• Interconnects for low voltage power distribution units • IBSB specially designed for industrial circuit breaker connection • Overcome vibration/alignment problems • Battery connections • Earth/ground connections	• Switchgear & control equipment • Transport • Electrical equipment manufacturers • Power generation
Power shunt (PBC & PPS) 	• Transformer or generator to busbar connection • Overcome vibration/alignment problems • Power interconnection	• Switchgear & control equipment • Power distribution • Transportation
Earth/ground copper braids (MBJ & BJ) 	• Power, earthing/grounding and equipotential connections • Electrical bonding enclosure door • EMI effect reduction application	• Switchgear & control equipment • Rail transportation • Electrical equipment manufacturers • Power generation (wind, solar) • Data center
Earth/ground stainless steel braids (CPI & CPIW) 	• Earthing/grounding and equipotential connections • Superior abrasion, corrosion, chemical, and UV resistance for outdoor applications • Expansion joints • Connections for lightning protection systems	• Transportation • Food and beverage industry • Power generation (wind, solar) • Chemical and oil industry • Automotive • Defense & aerospace • Civil construction • Urban projects
Flat and round copper braids in coils 	• Earth/ground connections • Power interconnection • Lightning protection • Flexible links • Overcome vibration/alignment problems	• Defense & aerospace • Rail transportation • Automotive • Electronics • General electrical sector • Civil construction
Tubular copper braids in coils 	• Screening of cables from electromagnetic, electrostatic and RF interference • Mechanical support • Protection against abrasion and corrosion • EMC & EMH applications	• Defense & aerospace • Transportation • Electronics & communication • Cable harness & assembly makers • Component distributors

INSULATED FLEXIBLE BUSBAR

A COMPLETE RANGE FLEXIBLE BUSBAR

Patent insulation on ERIFLEX FLEXIBAR :

- **ADVANCED**
- **STANDARD**
- **SUMMUM**



ENHANCED FLEXIBILITY

Pentair's exclusive manufacturing process offers superior flexibility:

- Copper laminates are free to slide within the insulation
- High insulation quality
- Wide variety of bending, twisting & folding possibilities

INNOVATIVE PATENT INSULATION

ERIFLEX FLEXIBAR has added grooves on the inner surface of the insulation sleeve to improve sliding between the central conductor and the insulation material. The grooves help to reduce the contact surface between the central conductor and the insulation material. This results enhances the flexibility of the flexible busbar.

Result: <20% of the inner surface is in contact with the central conductor.

This ERIFLEX patent idea makes ERIFLEX FLEXIBAR more flexible than ever and allows users to optimize the design of their electrical power connection.

* This patent is applicable for the cross section indication by "*" on the part number.


THE REFERENCE CONDUCTOR

- ERIFLEX FLEXIBAR is composed by with multiple layers of thin electrolytic copper, available in plain (STANDARD and SUMMUM) or tin plated (ADVANCED & STANDARD)
- ERIFLEX FLEXIBAR connections are made by punching directly through the laminates. There are no lugs to purchase, which eliminates faulty connection problems and makes installation easier and faster
- The insulation is a high-resistance, self-extinguishing TPE (FLEXIBAR ADVANCED), Silicone (FLEXIBAR SUMMUM) or PVC (FLEXIBAR CLASSIC) compound
- Traceability code and designation Part Number on product
- Easily formed, ERIFLEX FLEXIBAR improves assembly flexibility and aesthetics of panels
- Optimal alternative to large cable & rigid busbar
- Quality: 100% production dielectric tested
- Full range from 24 mm² up to 1200 mm²



FEATURES

- Self-extinguishable/flame retardant
- High mechanical resistance
- High elongation value
- High current withstanding
- High copper quality (99.9% purity)
- High conductivity

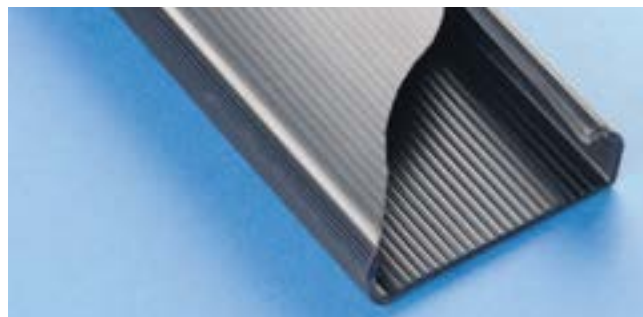

ERIFLEX

CONNECTION TYPES

- Between main power and distribution equipment (contactors, circuit-breakers...)
- Between transformer and busduct
- Between busduct and electrical cabinet

SPACE/WEIGHT SAVINGS

- Less installation space compared to cable
- Reduces the length, number of conductors and weight
- Insulation allows for closer spacing than traditional busbar designs.

COST SAVINGS

- Eliminates cost and installation of lugs
- Reduces inventory costs

IMPROVES RELIABILITY





- ERIFLEX FLEXIBAR is directly connected thus eliminating the cable lug connection
- Excellent resistance to vibration
- No crimping

AESTHETICS

- Optimal flexibility for an easy access




EASY INSTALLATION

- Thanks to its design all ERIFLEX FLEXIBAR can be easily bent and shaped for all sizes



Skin Effect on A.C. Application

Comparison to the penetration depth between:

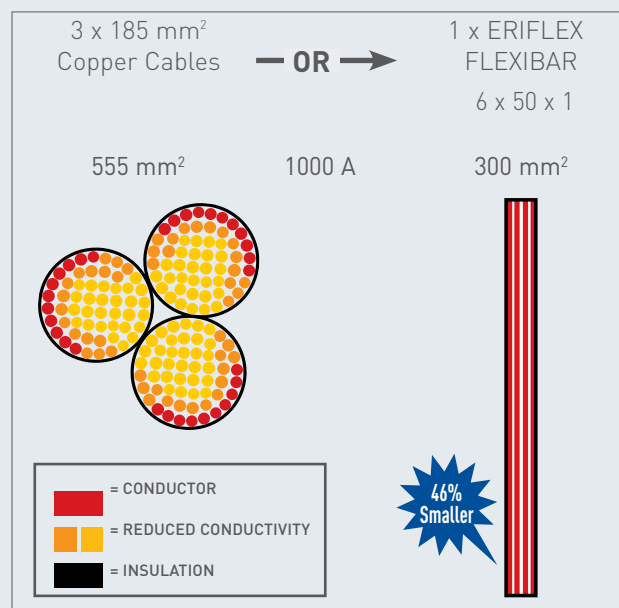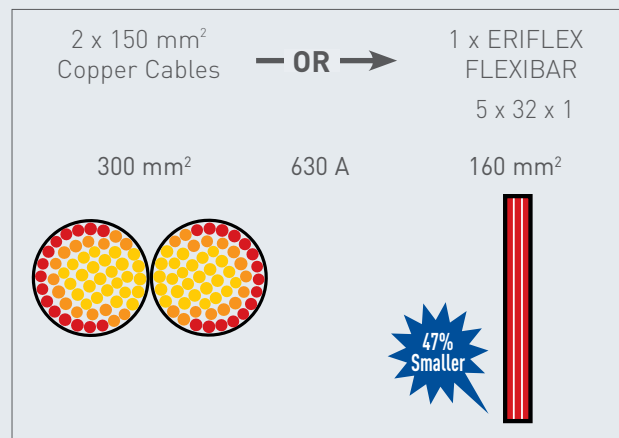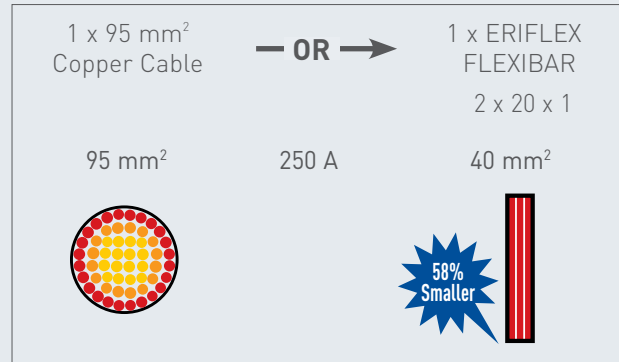

Representative to scale.
ERIFLEX FLEXIBAR intensity and cable intensity are based on conductor temperature rise of 50°C.

ERIFLEX FLEXIBAR ADVANCED



UNIQUE - SAFER - FLEXIBLE



ERIFLEX FLEXIBAR ADVANCED

Unique – Safer – Flexible

- Conductor is electrolytic **tinned** copper (Cu-ETP)
- Insulation is a high-resistance TEP **Low Smoke, Halogen Free and Flame Retardant (LSHFFR)**, compound:
 - Typical elongation: 500%
 - Working temperature: -50°C 105°C
 - Typical thickness: 1.8 mm
 - Self-extinguishing: UL 94 V0
 - Dielectric strength: 20kV/mm
 - Nominal voltage: 1000 V AC/1500 V DC (IEC – UL)
 - Dielectric strength: 20kV/mm

WHY IS ERIFLEX FLEXIBAR ADVANCED A SAFER INSULATION?

Low smoke features :

- Generates less corrosive smoke ISO 5659-2.
- Improves visibility for people to be able to easily locate the emergency exit and also allows rescue workers to better assess an emergency situation.


The halogen-free feature enables:

- Reduction in the quantity of toxic smoke
- Minimum of toxicity with no halogens (according to IEC 60754-1)
- Use in enclosed spaces for specific applications such as submarines, switchboards, and other enclosed environments that require a low emissions solution

The flame retardant portion of the test illustrates the self-extinguish feature:

- Compliant with the UL 94-V0 Glow wire test @ 960°C (IEC 60695-2) testing standard.
- Reduces the risk of the spread of fire
- Less damage to your electrical installation

ERIFLEX FLEXIBAR ADVANCED has a unique insulation on the market that combine **low smoke, halogen-free and flame retardant** features that improve both the reliability of your electrical installation and safety for equipment and people

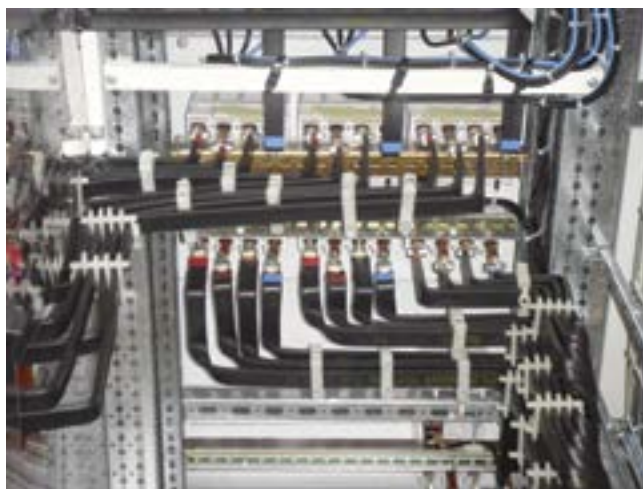

Some photographs in the ERIFLEX FLEXIBAR ADVANCED section may actually be using ERIFLEX FLEXIBAR

ERIFLEX FLEXIBAR ADVANCED TECHNICAL CHARACTERISTICS


A	Part Number							Section mm ²	ΔT (K)						Current Coefficient	
		N		A		B			70	60	50	40	30	20		
125 A	534001	3	x	9	x	0,8		21,6	158	147	134	120	104	85	1,72	2,25
	534000	8	x	6	x	0,5		24	196	182	166	143	128	105	1,72	2,25
	534004	3	x	13	x	0,5		19,5	198	184	167	150	130	106	1,72	2,25
	534006	2	x	15,5	x	0,8		24,8	252	234	212	191	165	134	1,72	2,25
	534002	6	x	9	x	0,8		43,2	290	269	245	220	190	155	1,72	2,25
250 A	534005	6	x	13	x	0,5		39	300	277	253	226	196	160	1,72	2,25
	534003	9	x	9	x	0,8		64,8	314	291	265	237	206	168	1,72	2,25
	534010	2	x	20	x	1		40	326	300	275	246	214	174	1,72	2,25
	534007	4	x	15,5	x	0,8		49,6	380	350	320	286	248	202	1,72	2,25
	534011	3	x	20	x	1		60	428	395	360	323	280	228	1,72	2,25
400 A	534016	2	x	24	x	1		48	450	416	380	340	295	240	1,72	2,25
	534008	6	x	15,5	x	0,8		74,4	476	440	402	360	318	254	1,72	2,25
	534012	4	x	20	x	1		80	476	440	402	360	312	254	1,72	2,25
	534023	2	x	32	x	1		64	480	445	406	363	315	257	1,72	2,25
	534017	3	x	24	x	1		72	490	453	413	370	320	261	1,72	2,25
	534013	5	x	20	x	1		100	498	460	420	376	326	266	1,72	2,25
	534009	10	x	15,5	x	0,8		124	538	498	455	407	352	288	1,72	2,25
	534030	2	x	40	x	1		80	538	500	455	406	352	288	1,72	2,25
	534014	6	x	20	x	1		120	546	506	462	413	358	292	1,72	2,25
	534018	4	x	24	x	1		96	550	510	465	416	360	294	1,72	2,25
	534024	3	x	32	x	1		96	570	525	480	430	372	304	1,72	2,25
500 A	534019	5	x	24	x	1		120	608	563	514	460	398	325	1,72	2,25
	534031	3	x	40	x	1		120	617	570	522	466	405	330	1,72	2,25
	534025	4	x	32	x	1		128	648	600	548	490	425	347	1,72	2,25
	534020	6	x	24	x	1		144	670	620	566	506	438	358	1,72	2,25
	534037	3	x	50	x	1		150	700	650	592	530	460	374	1,72	2,25
630 A	534032	4	x	40	x	1		160	727	673	615	550	476	389	1,72	2,25
	534026	5	x	32	x	1		160	758	702	640	573	496	405	1,72	2,25
	534015	10	x	20	x	1		200	762	706	645	576	500	408	1,72	2,25
	534021	8	x	24	x	1		192	802	743	678	606	525	429	1,72	2,25
	534027	6	x	32	x	1		192	846	783	715	640	555	452	1,72	2,25
800 A	534038	4	x	50	x	1		200	860	795	727	650	563	460	1,72	2,25
	534033	5	x	40	x	1		200	900	832	760	680	590	481	1,72	2,25
	534022	10	x	24	x	1		240	948	877	800	716	592	506	1,72	2,25
	534044	4	x	63	x	1		252	1010	935	855	763	661	541	1,65	2,12
	534028	8	x	32	x	1		256	1018	943	860	770	667	544	1,72	2,25
1000 A	534034	6	x	40	x	1		240	1018	943	860	770	667	544	1,72	2,25
	534039	5	x	50	x	1		250	1100	1016	930	830	718	588	1,72	2,25
	534049	4	x	80	x	1		320	1200	1110	1015	906	785	642	1,65	2,12
	534045	5	x	63	x	1		315	1220	1125	1030	920	797	651	1,65	2,12
	534040	6	x	50	x	1		300	1225	1135	1035	925	802	655	1,72	2,25
	534029	10	x	32	x	1		320	1230	1140	1040	930	805	658	1,72	2,25
	534035	8	x	40	x	1		320	1230	1140	1040	930	805	658	1,72	2,25
	534041	8	x	50	x	1		400	1393	1290	1175	1050	912	743	1,72	2,25
	534050	5	x	80	x	1		400	1390	1285	1175	1050	910	743	1,65	2,12
	534036	10	x	40	x	1		400	1400	1295	1181	1055	915	747	1,72	2,25
	534046	6	x	63	x	1		378	1437	1330	1215	1085	941	768	1,65	2,12
1250 A	534051	6	x	80	x	1		480	1627	1505	1375	1230	1065	870	1,65	2,12
	534055	5	x	100	x	1		500	1635	1515	1385	1235	1070	876	1,6	2,02
	534042	10	x	50	x	1		500	1650	1525	1395	1245	1080	882	1,72	2,25
	534047	8	x	63	x	1		504	1650	1525	1395	1245	1080	882	1,65	2,12
	534056	6	x	100	x	1		600	1843	1705	1550	1393	1205	980	1,6	2,02
1600 A	534048	10	x	63	x	1		630	1895	1755	1600	1435	1240	1012	1,65	2,12
	534052	8	x	80	x	1		640	1895	1755	1600	1430	1240	1012	1,65	2,12
	534053	10	x	80	x	1		800	2100	1945	1775	1585	1375	1123	1,65	2,12
	534057	8	x	100	x	1		800	2147	1990	1815	1625	1405	1148	1,6	2,02
	534058	10	x	100	x	1		1000	2350	2170	1985	1775	1535	1255	1,6	2,02
	534059	12	x	100	x	1		1200	2500	2315	2115	1890	1636	1338	1,6	2,02
	534060	10	x	120	x	1		1200	2755	2550	2330	2070	1792	1474	1,49	1,95

ADMISSIBLE CURRENTS: This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

ERIFLEX FLEXIBAR ADVANCED

UNIQUE - SAFER - FLEXIBLE

Selection of ERIFLEX FLEXIBAR ADVANCED according to the internal temperature of the panel

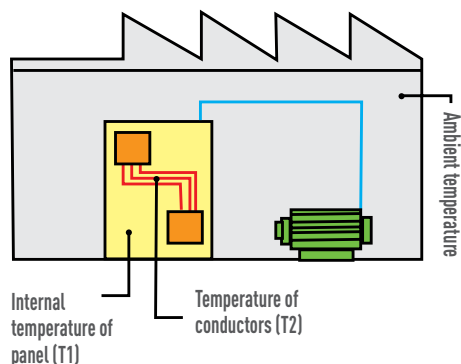

TEMPERATURE RISE OF CONDUCTOR = $T2 - T1 = \Delta T$ (K)

Ex: For a current of 630A, with: $T1 = 40^{\circ}\text{C}$ - $T2 = 90^{\circ}\text{C}$

1) $\Delta T = 90 - 40 = 50\text{K}$

2) In the 50°K column, find the closest current value to 630A. ERIFLEX FLEXIBAR ADVANCED 5x32x1 - 552650 - 160 mm² - 640A.

3) Select ERIFLEX FLEXIBAR ADVANCED according to the terminal width of the equipment being connected.

K = Kelvin degree (temperature calculated, but not measurable)

ERIFLEX FLEXIBAR ADVANCED IN PARALLEL

When using 2 or 3 ERIFLEX FLEXIBAR ADVANCED on edge in parallel for the same phase, use the coefficient:

Ex: $5 \times 32 \times 1 - \Delta T^{\circ} = 50\text{K}$: 640 A

2 bars in parallel > $640\text{ A} \times 1,72 = 1100\text{ A}$

3 bars in parallel > $640\text{ A} \times 2,25 = 1440\text{ A}$

CERTIFICATION & APPROVALS

- International Commission Electrotechnique (IEC) - Meets all requirements of IEC 61439.1
- UL 67 Recognized component in the "Panelboard and Switchboard accessories - component category (UL file E125470) for US
- UL 758 Recognized component in the "Appliance wiring material - component" category style 11681
- CE Conformity
- RoHS compliant
- Class II Conductors (IEC 61439-1, Chapter 8.4.4 - Protection by total insulation)
- Low Smoke ISO 5659-2
- Halogen-free IEC 60754-1
- Flame retardant UL94-V0
- Glow wire test @ 960°C (IEC 60695-2)



ERIFLEX FLEXIBAR ADVANCED PART NUMBERS

2 METERS TINNED COPPER


Part Number	Global Part Number	ERIFLEX FLEXIBAR Description		 Kg
534000	FADV2MTC8X6	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 8X6X0,5	4	0,35
534001	FADV2MTC3X9	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 3X9X0,8	4	0,43
534002	FADV2MTC6X9	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 6X9X0,8	4	0,81
534003	FADV2MTC9X9	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 9X9X0,8	4	1,19
534004	FADV2MTC3X13	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 3X13X0,5	4	0,45
534005	FADV2MTC6X13	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 6X13X0,5	4	0,79
534006	FADV2MTC2X15-5	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 2X15,5X0,8	4	0,51
534007	FADV2MTC4X15-5	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 4X15,5X0,8	4	1,02
534008	FADV2MTC6X15-5	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 6X15,5X0,8	4	1,50
534009	FADV2MTC10X15-5	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 10X15,5X0,8	4	2,20
534010	FADV2MTC2X20X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 2X20X1	3	1,05
534011	FADV2MTC3X20X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 3X20X1	3	1,42
534012	FADV2MTC4X20X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 4X20X1	3	1,78
534013*	FADV2MTC5X20X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 5X20X1	3	2,15
534014*	FADV2MTC6X20X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 6X20X1	3	2,41
534015*	FADV2MTC10X20X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 10X20X1	3	3,99
534016	FADV2MTC2X24X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 2X24X1	3	1,24
534017	FADV2MTC3X24X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 3X24X1	3	1,68
534018	FADV2MTC4X24X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 4X24X1	3	2,12
534019*	FADV2MTC5X24X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 5X24X1	3	2,55
534020*	FADV2MTC6X24X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 6X24X1	3	2,99
534021*	FADV2MTC8X24X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 8X24X1	3	3,87
534022*	FADV2MTC10X24X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 10X24X1	3	4,75
534023	FADV2MTC2X32X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 2X32X1	2	1,62
534024	FADV2MTC3X32X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 3X32X1	2	2,20
534025	FADV2MTC4X32X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 4X32X1	2	2,78
534026*	FADV2MTC5X32X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 5X32X1	2	3,36
534027*	FADV2MTC6X32X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 6X32X1	2	3,94
534028*	FADV2MTC8X32X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 8X32X1	2	5,10
534029*	FADV2MTC10X32X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 10X32X1	2	6,27
534030	FADV2MTC2X40X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 2X40X1	2	1,99
534031	FADV2MTC3X40X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 3X40X1	2	2,72
534032	FADV2MTC4X40X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 4X40X1	2	3,44
534033*	FADV2MTC5X40X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 5X40X1	2	4,16
534034*	FADV2MTC6X40X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 6X40X1	2	4,89
534035*	FADV2MTC8X40X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 8X40X1	2	6,33
534036*	FADV2MTC10X40X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 10X40X1	2	7,78
534037	FADV2MTC3X50X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 3X50X1	1	3,37
534038*	FADV2MTC4X50X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 4X50X1	1	4,27
534039*	FADV2MTC5X50X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 5X50X1	1	5,17
534040*	FADV2MTC6X50X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 6X50X1	1	6,07
534041*	FADV2MTC8X50X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 8X50X1	1	7,87
534042*	FADV2MTC10X50X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 10X50X1	1	9,68
534044*	FADV2MTC4X63X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 4X63X1	1	5,34
534045*	FADV2MTC5X63X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 5X63X1	1	6,48
534046*	FADV2MTC6X63X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 6X63X1	1	7,61
534047*	FADV2MTC8X63X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 8X63X1	1	9,88
534048*	FADV2MTC10X63X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 10X63X1	1	12,14
534049*	FADV2MTC4X80X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 4X80X1	1	6,75
534050*	FADV2MTC5X80X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 5X80X1	1	8,19
534051*	FADV2MTC6X80X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 6X80X1	1	9,62
534052*	FADV2MTC8X80X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 8X80X1	1	12,49
534053*	FADV2MTC10X80X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 10X80X1	1	15,37
534055*	FADV2MTC5X100X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 5X100X1	1	10,20
534056*	FADV2MTC6X100X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 6X100X1	1	11,99
534057*	FADV2MTC8X100X1	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 8X100X1	1	15,57
534058*	FADV2MTC10X100	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 10X100X1	1	19,16
534059*	FADV2MTC12X100	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 12X100X1	1	22,74
534060*	FADV2MTC10X120	ERIFLEX FLEXIBAR Advanced 2 m Tinned Copper 10X120X1	1	22,90

*ERIFLEX Patent insulation

All **ERIFLEX FLEXIBAR ADVANCED** cross sections can be bent, folded or twisted with a small bending radius for shorter and more compact power connections, from 125A up to 4500A applications.




ERIFLEX FLEXIBAR STANDARD

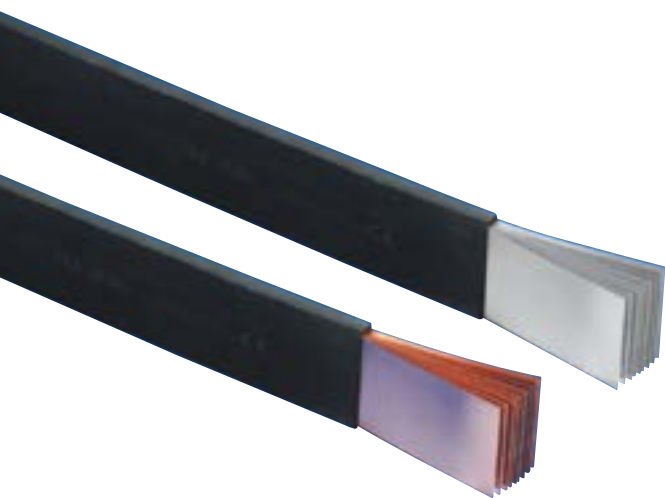

ERIFLEX FLEXIBAR STANDARD

- Conductor is electrolytic copper (Cu-ETP)
- Insulation is a high-resistance vinyl compound:
 - Elongation: 370%
 - Operating temperature: -50°C - 105°C
 - Thickness: 2 mm ± 0,2
 - Self-extinguishing: UL 94 V0
 - Dielectric strength: 20kV/mm
 - Nominal voltage = 1000 V AC/1500 V DC (UL & IEC)

Selection of ERIFLEX FLEXIBAR according to the internal temperature of the panel

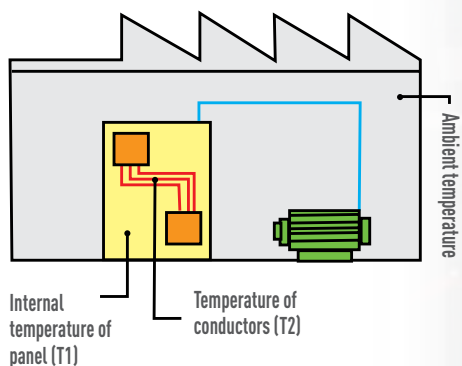

TEMPERATURE RISE OF CONDUCTOR = $T_2 - T_1 = \Delta T$ (K)

Ex: For a current of 630A, with: $T_1 = 40^\circ\text{C}$ - $T_2 = 90^\circ\text{C}$

1) $\Delta T = 90 - 40 = 50\text{K}$

2) In the 50°K column, find the closest current value to 630A. ERIFLEX FLEXIBAR 5x32x1 - 552650 - 160 mm² - 640A.

3) Select ERIFLEX FLEXIBAR according to the terminal width of the equipment being connected.

K = Kelvin degree (temperature calculated, but not measurable)

ERIFLEX FLEXIBAR IN PARALLEL

When using 2 or 3 ERIFLEX FLEXIBAR on edge in parallel for the same phase, use the coefficient:

Ex: 5 x 32 x 1 - $\Delta T^\circ = 50\text{K}$: 640 A

2 bars in parallel > 640 A x 1,72 = 1100 A

3 bars in parallel > 640 A x 2,25 = 1440 A

ERIFLEX FLEXIBAR STANDARD TECHNICAL CHARACTERISTICS

A	Part Number							Section mm ²	ΔT (K)						Current Coefficient	
		N		A		B			70	60	50	40	30	20		
125 A	552400	8	x	6	x	0,5		24	196	182	166	143	128	105	1,72	2,25
	552410	3	x	9	x	0,8		21,6	158	147	134	120	104	85	1,72	2,25
	552420	6	x	9	x	0,8		43,2	290	269	245	220	190	155	1,72	2,25
	552440	3	x	13	x	0,5		19,5	198	184	167	150	130	106	1,72	2,25
	552390	2	x	15,5	x	0,8		24,8	252	234	212	191	165	134	1,72	2,25
250 A	552430	9	x	9	x	0,8		64,8	314	291	265	237	206	168	1,72	2,25
	552450	6	x	13	x	0,5		39	300	277	253	226	196	160	1,72	2,25
	552460	4	x	15,5	x	0,8		49,6	380	350	320	286	248	202	1,72	2,25
	552490	2	x	20	x	1		40	326	300	275	246	214	174	1,72	2,25
	552500	3	x	20	x	1		60	428	395	360	323	280	228	1,72	2,25
	552550	2	x	24	x	1		48	450	416	380	340	295	240	1,72	2,25
400 A	552470	6	x	15,5	x	0,8		74,4	476	440	402	360	318	254	1,72	2,25
	552480	10	x	15,5	x	0,8		124	538	498	455	407	352	288	1,72	2,25
	552510	4	x	20	x	1		80	476	440	402	360	312	254	1,72	2,25
	552520	5	x	20	x	1		100	498	460	420	376	326	266	1,72	2,25
	552530	6	x	20	x	1		120	546	506	462	413	358	292	1,72	2,25
	552560	3	x	24	x	1		72	490	453	413	370	320	261	1,72	2,25
	552570	4	x	24	x	1		96	550	510	465	416	360	294	1,72	2,25
	552620	2	x	32	x	1		64	480	445	406	363	315	257	1,72	2,25
	552630	3	x	32	x	1		96	570	525	480	430	372	304	1,72	2,25
	552690	2	x	40	x	1		80	538	500	455	406	352	288	1,72	2,25
500 A	552580	5	x	24	x	1		120	608	563	514	460	398	325	1,72	2,25
	552590	6	x	24	x	1		144	670	620	566	506	438	358	1,72	2,25
	552640	4	x	32	x	1		128	648	600	548	490	425	347	1,72	2,25
	552700	3	x	40	x	1		120	617	570	522	466	405	330	1,72	2,25
	552710	4	x	40	x	1		160	727	673	615	550	476	389	1,72	2,25
	552760	3	x	50	x	1		150	700	650	592	530	460	374	1,72	2,25
630 A	552540	10	x	20	x	1		200	762	706	645	576	500	408	1,72	2,25
	552600	8	x	24	x	1		192	802	743	678	606	525	429	1,72	2,25
	552650	5	x	32	x	1		160	758	702	640	573	496	405	1,72	2,25
	552660	6	x	32	x	1		192	846	783	715	640	555	452	1,72	2,25
	552720	5	x	40	x	1		200	900	832	760	680	590	481	1,72	2,25
	552770	4	x	50	x	1		200	860	795	727	650	563	460	1,72	2,25
800 A	552610	10	x	24	x	1		240	948	877	800	716	592	506	1,72	2,25
	552670	8	x	32	x	1		256	1018	943	860	770	667	544	1,72	2,25
	552730	6	x	40	x	1		240	1018	943	860	770	667	544	1,72	2,25
	552780	5	x	50	x	1		250	1100	1016	930	830	718	588	1,72	2,25
	552830	4	x	63	x	1		252	1010	935	855	763	661	541	1,65	2,12
1000 A	552680	10	x	32	x	1		320	1230	1140	1040	930	805	658	1,72	2,25
	552740	8	x	40	x	1		320	1230	1140	1040	930	805	658	1,72	2,25
	552750	10	x	40	x	1		400	1400	1295	1181	1055	915	747	1,72	2,25
	552790	6	x	50	x	1		300	1225	1135	1035	925	802	655	1,72	2,25
	552800	8	x	50	x	1		400	1393	1290	1175	1050	912	743	1,72	2,25
	552840	5	x	63	x	1		315	1220	1125	1030	920	797	651	1,65	2,12
	552850	6	x	63	x	1		378	1437	1330	1215	1085	941	768	1,65	2,12
	552890	4	x	80	x	1		320	1200	1110	1015	906	785	642	1,65	2,12
	552900	5	x	80	x	1		400	1390	1285	1175	1050	910	743	1,65	2,12
1250 A	552810	10	x	50	x	1		500	1650	1525	1395	1245	1080	882	1,72	2,25
	552860	8	x	63	x	1		504	1650	1525	1395	1245	1080	882	1,65	2,12
	552910	6	x	80	x	1		480	1627	1505	1375	1230	1065	870	1,65	2,12
	552950	5	x	100	x	1		500	1635	1515	1385	1235	1070	876	1,6	2,02
	552960	6	x	100	x	1		600	1843	1705	1550	1393	1205	980	1,6	2,02
1600 A	552870	10	x	63	x	1		630	1895	1755	1600	1435	1240	1012	1,65	2,12
	552920	8	x	80	x	1		640	1895	1755	1600	1430	1240	1012	1,65	2,12
	552930	10	x	80	x	1		800	2100	1945	1775	1585	1375	1123	1,65	2,12
	552970	8	x	100	x	1		800	2147	1990	1815	1625	1405	1148	1,6	2,02
	552980	10	x	100	x	1		1000	2350	2170	1985	1775	1535	1255	1,6	2,02
	552990	12	x	100	x	1		1200	2500	2315	2115	1890	1636	1338	1,6	2,02
	538650	10	x	120	x	1		1200	2755	2550	2330	2070	1792	1474	1,49	1,95

ADMISSIBLE CURRENTS: This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

ERIFLEX FLEXIBAR STANDARD

CERTIFICATION & APPROVALS

- International Commission Electrotechnique (IEC) - Meets all requirements of IEC 60439.1 & IEC 61439.1
- UL 67 Recognized component in the "Panelboard and Switchboard accessories - component" category (UL file E125470) for US and Canadian territory
- UL 758 Recognized component in the "Appliance wiring material - component" category style 10531 (UL file E316390) and category style 11343 (UL file E316390)
- Bureau Veritas Certified - No. 02859/DOBV. Ship application
- Canadian Standards Association - CSA certified as appliance wiring material for a maximum of 1000 volts. File N° 090005 (CAN/CSA - C22.2)
- American Bureau of Shipping (ABS) - Certificate No. 08-HS365878-1-PDA-DUP - Marine & Offshore Applications
- CE Conformity
- EAC compliant
- RoHS compliant
- Class II Conductors (IEC 61439-1, Chapter 8.4.4 - Protection by total insulation)



ERIFLEX FLEXIBAR STANDARD PART NUMBERS

2 METERS RED COPPER

Part Number	ERIFLEX FLEXIBAR Description		 Kg
552400	2M 8 x 6 x 0,5	10	0,35
552410	2M 3 x 9 x 0,8	10	0,43
552420	2M 6 x 9 x 0,8	10	0,81
552430	2M 9 x 9 x 0,8	10	1,19
552440	2M 3 x 13 x 0,5	10	0,45
552450	2M 6 x 13 x 0,5	10	0,79
552390	2M 2 x 15,5 x 0,8	10	0,51
552460	2M 4 x 15,5 x 0,8	10	1,02
552470	2M 6 x 15,5 x 0,8	10	1,50
552480	2M 10 x 15,5 x 0,8	10	2,20
552490	2M 2 x 20 x 1	5	1,05
552500	2M 3 x 20 x 1	5	1,42
552510	2M 4 x 20 x 1	5	1,78
552520*	2M 5 x 20 x 1	5	2,15
552530*	2M 6 x 20 x 1	5	2,41
552540*	2M 10 x 20 x 1	5	3,99
552550	2M 2 x 24 x 1	5	1,24
552560	2M 3 x 24 x 1	5	1,68
552570	2M 4 x 24 x 1	5	2,12
552580*	2M 5 x 24 x 1	5	2,55
552590*	2M 6 x 24 x 1	5	2,99
552600*	2M 8 x 24 x 1	5	3,87
552610*	2M 10 x 24 x 1	5	4,75
552620	2M 2 x 32 x 1	5	1,62
552630	2M 3 x 32 x 1	5	2,20
552640	2M 4 x 32 x 1	5	2,78
552650*	2M 5 x 32 x 1	5	3,36
552660*	2M 6 x 32 x 1	5	3,94
552670*	2M 8 x 32 x 1	5	5,10
552680*	2M 10 x 32 x 1	5	6,27
552690	2M 2 x 40 x 1	5	1,99
552700	2M 3 x 40 x 1	5	2,72
552710	2M 4 x 40 x 1	5	3,44
552720*	2M 5 x 40 x 1	5	4,16
552730*	2M 6 x 40 x 1	5	4,89
552740*	2M 8 x 40 x 1	5	6,33
552750*	2M 10 x 40 x 1	5	7,78
552760	2M 3 x 50 x 1	5	3,37
552770*	2M 4 x 50 x 1	5	4,27
552780*	2M 5 x 50 x 1	5	5,17
552790*	2M 6 x 50 x 1	2	6,07
552800*	2M 8 x 50 x 1	2	7,87
552810*	2M 10 x 50 x 1	2	9,68
552830*	2M 4 x 63 x 1	2	5,34
552840*	2M 5 x 63 x 1	2	6,48
552850*	2M 6 x 63 x 1	2	7,61
552860*	2M 8 x 63 x 1	2	9,88
552870*	2M 10 x 63 x 1	2	12,14
552890*	2M 4 x 80 x 1	2	6,75
552900*	2M 5 x 80 x 1	2	8,19
552910*	2M 6 x 80 x 1	2	9,62
552920*	2M 8 x 80 x 1	2	12,49
552930*	2M 10 x 80 x 1	2	15,37
552950*	2M 5 x 100 x 1	2	10,20
552960*	2M 6 x 100 x 1	2	11,99
552970*	2M 8 x 100 x 1	2	15,57
552980*	2M 10 x 100 x 1	2	19,16
552990*	2M 12 x 100 x 1	2	22,74
538650*	2M 10 x 120 x 1	1	22,90

* ERIFLEX patent insulation



All ERIFLEX FLEXIBAR cross sections can be bent, folded or twisted with a small bending radius for shorter and more compact power connections, from 125A up to 4500A applications.

3 METERS RED COPPER

Part Number	ERIFLEX FLEXIBAR Description		 Kg
541060	3M 4 x 15,5 x 0,8	5	1,53
541090	3M 2 x 20 x 1	5	1,58
541100	3M 3 x 20 x 1	5	2,13
541110	3M 4 x 20 x 1	5	2,67
541150	3M 2 x 24 x 1	5	1,86
541160	3M 3 x 24 x 1	5	2,52
541170	3M 4 x 24 x 1	5	3,18
541180*	3M 5 x 24 x 1	5	3,83
541230	3M 3 x 32 x 1	2	3,30
541240	3M 4 x 32 x 1	2	4,17
541250*	3M 5 x 32 x 1	2	5,04
541260*	3M 6 x 32 x 1	2	5,91
541270*	3M 8 x 32 x 1	2	7,65
541320*	3M 5 x 40 x 1	2	6,24
541380*	3M 5 x 50 x 1	2	7,76


* ERIFLEX patent insulation

3 METERS TINNED COPPER

Part Number	ERIFLEX FLEXIBAR Description		 Kg
505501	3MTC 2 x 20 x 1	5	1,58
505502	3MTC 3 x 20 x 1	5	2,13
505503	3MTC 4 x 20 x 1	5	2,67
505506	3MTC 2 x 24 x 1	5	1,86
505507	3MTC 3 x 24 x 1	5	2,52
505508	3MTC 4 x 24 x 1	5	3,18
505509*	3MTC 5 x 24 x 1	5	3,83
505510*	3MTC 6 x 24 x 1	5	4,48
505514	3MTC 3 x 32 x 1	2	3,30
505515	3MTC 4 x 32 x 1	2	4,17
505516*	3MTC 5 x 32 x 1	2	5,04
505517*	3MTC 6 x 32 x 1	2	5,91
505518*	3MTC 8 x 32 x 1	2	7,65
505519*	3MTC 10 x 32 x 1	2	9,40
505523*	3MTC 5 x 40 x 1	2	6,24
505526*	3MTC 10 x 40 x 1	2	11,67

* ERIFLEX patent insulation

ERIFLEX FLEXIBAR SUMMUM

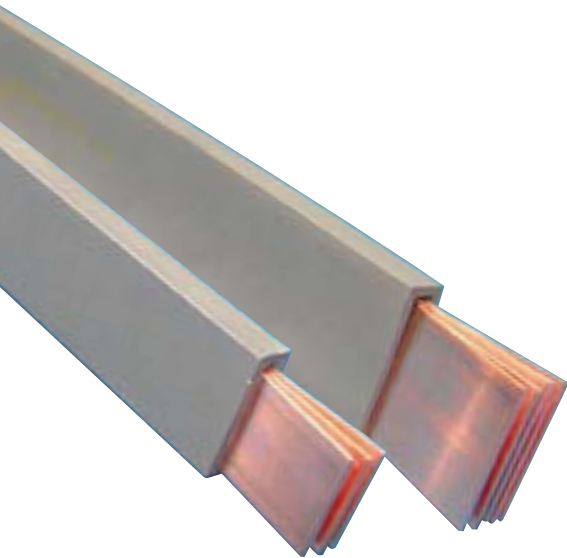

ERIFLEX FLEXIBAR SUMMUM HALOGEN FREE - HIGH TEMPERATURE


- Halogen-free
- High current density
- High ambient temperature
- High flexibility
- High insulation value

ERIFLEX FLEXIBAR SUMMUM

- Conductor in electrolytic copper
 - Laminates thickness 1 mm
- Insulation in silicone compound
 - Working temperature: -50°C up to 280°C (315°C short time)
 - Low smoke
 - Very high UV & ozone withstanding
 - Self-extinguishing: UL 94 V 0
 - Elongation: 400% minimum
 - Tear resistance: 20 KN/m minimum
 - Thickness: 2 mm ± 0.2 mm
 - Dielectric strength: 20 KV/mm
 - Maximum continuous voltage: 1000 V AC/ 1500 V DC
 - American Bureau of Shipping (ABS) - Certificate No. 08-HS365878-1-PDA-DUP - Marine & Offshore Applications
 - IEC 60439.1
 - IEC 61439.1



On request: Tinned ERIFLEX FLEXIBAR SUMMUM

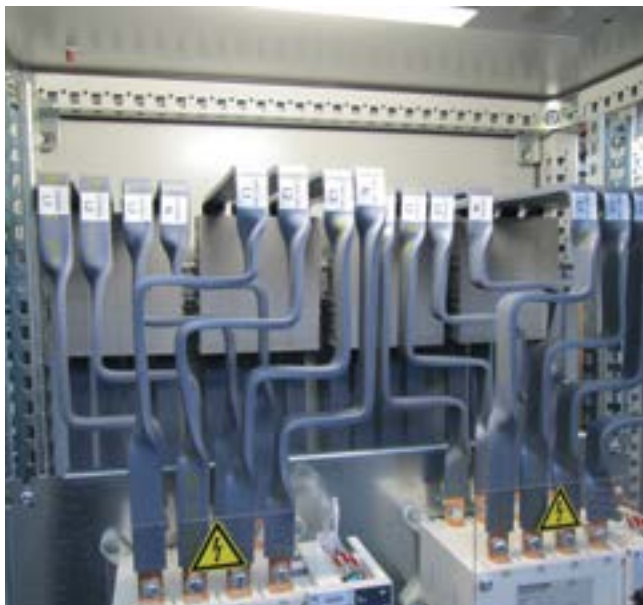

ERIFLEX




2 METER RED COPPER

Part Number	ERIFLEX FLEXIBAR Description		 Kg	Section mm ²	IEC® Ampacity ΔT (°K)					Current Coefficient	
					70	60	50	40	30		
566490	ERIFLEX FLEXIBAR SUMMUM 2 M 2 x 20 x 1	5	1,05	40	326	300	275	246	214	1,72	2,25
566500	ERIFLEX FLEXIBAR SUMMUM 2 M 3 x 20 x 1	5	1,42	60	428	395	360	323	280	1,72	2,25
566510	ERIFLEX FLEXIBAR SUMMUM 2 M 4 x 20 x 1	5	1,78	80	476	440	402	360	312	1,72	2,25
566520	ERIFLEX FLEXIBAR SUMMUM 2 M 5 x 20 x 1	5	2,15	100	498	460	420	376	326	1,72	2,25
566550	ERIFLEX FLEXIBAR SUMMUM 2 M 2 x 24 x 1	5	1,24	48	450	416	380	340	295	1,72	2,25
566560	ERIFLEX FLEXIBAR SUMMUM 2 M 3 x 24 x 1	5	1,68	72	490	453	413	370	320	1,72	2,25
566570	ERIFLEX FLEXIBAR SUMMUM 2 M 4 x 24 x 1	5	2,12	96	550	540	465	416	360	1,72	2,25
566580	ERIFLEX FLEXIBAR SUMMUM 2 M 5 x 24 x 1	5	2,55	120	608	563	514	460	398	1,72	2,25
566590	ERIFLEX FLEXIBAR SUMMUM 2 M 6 x 24 x 1	5	2,99	144	670	620	566	506	438	1,72	2,25
566630	ERIFLEX FLEXIBAR SUMMUM 2 M 3 x 32 x 1	5	2,2	96	570	525	480	430	372	1,72	2,25
566640	ERIFLEX FLEXIBAR SUMMUM 2 M 4 x 32 x 1	5	2,78	128	648	600	548	490	425	1,72	2,25
566650	ERIFLEX FLEXIBAR SUMMUM 2 M 5 x 32 x 1	5	3,36	160	758	702	640	573	496	1,72	2,25
566660	ERIFLEX FLEXIBAR SUMMUM 2 M 6 x 32 x 1	5	3,94	192	846	783	715	640	555	1,72	2,25
566670	ERIFLEX FLEXIBAR SUMMUM 2 M 8 x 32 x 1	5	5,1	256	1018	943	860	770	667	1,72	2,25
566720	ERIFLEX FLEXIBAR SUMMUM 2 M 5 x 40 x 1	5	4,16	200	900	832	760	680	590	1,72	2,25
566730	ERIFLEX FLEXIBAR SUMMUM 2 M 6 x 40 x 1	5	4,89	240	1018	943	860	770	667	1,72	2,25
566750	ERIFLEX FLEXIBAR SUMMUM 2 M 10 x 40 x 1	5	7,78	400	1400	1295	1181	1055	915	1,72	2,25
566780	ERIFLEX FLEXIBAR SUMMUM 2 M 5 x 50 x 1	5	5,17	250	1100	1016	930	830	718	1,72	2,25
566800	ERIFLEX FLEXIBAR SUMMUM 2 M 8 x 50 x 1	2	7,87	400	1393	1290	1175	1050	912	1,72	2,25
566810	ERIFLEX FLEXIBAR SUMMUM 2 M 10 x 50 x 1	2	9,68	500	1650	1525	1395	1245	1080	1,72	2,25

ADMISSIBLE CURRENTS: This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

Some photographs in the ERIFLEX FLEXIBAR SUMMUM section may actually be using ERIFLEX FLEXIBAR

ACCESSORIES

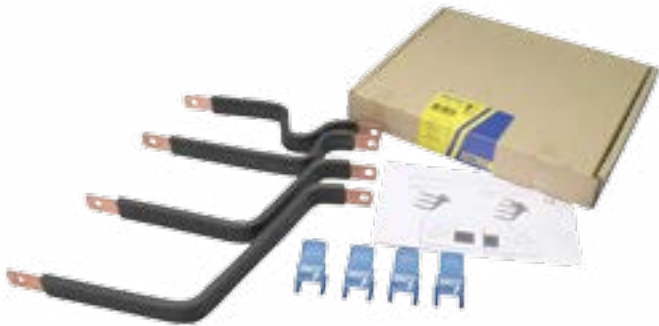


ERIFLEX FLEXIBAR STANDARD KITS

- Application: connections between busbar and fixed switchgear
- Kit is comprised of ERIFLEX FLEXIBAR STANDARD preformed and punched at the 2 extremities & end covers
- Only 1 kit for 3 configurations
- Intensity range : from 250A to 630A



ERIFLEX FLEXIBAR STANDARD KIT 250A

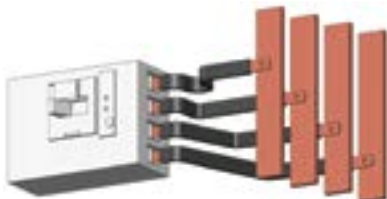

3 Phases

3 Phases +
Neutral


Kit 250A T

Kit 250A TN



Part No.	Description		 kg/lbs
541800	Kit 250A T	1	0,76/1.68
541805	Kit 250A TN	1	0,98/2.16

ERIFLEX FLEXIBAR STANDARD KIT 630A

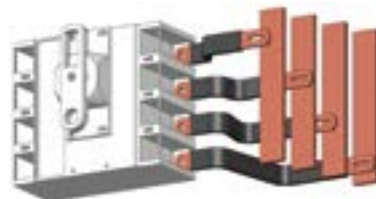

3 Phases

3 Phases +
Neutral

Kit 630A T

Kit 630A TN



Part No.	Description		 kg/lbs
541810	Kit 630A T	1	2,10/4.63
541815	Kit 630A TN	1	3,10/6.83

END COVER 20, 24 & 32

- **End Cover 20:** Kit 250A T, Kit 250A TN, IBS 25, IBS 50, IBSB 50 and IBSB 70.
- **End Cover 24:** 24 mm and IBSB 100
- **End Cover 32:** Kit 630A T, Kit 630A TN, IBSB 120, 185 and 240.
- Transparent cover Visual inspection
- Halogen-free
- Self-extinguishing: UL 94 V-0
- RoHS compliant
- Easy-fitting after bolting
- IEC 60439.1
- IEC 61439.1



Part No.	Description		 kg/lbs
541774	End Cover 20	12	0,19/0.42
541775	End Cover 24	12	0,22/0.48
541776	End Cover 32	12	0,26/0.57

ACCESSORIES



SPACER CLAMPS

- Easy to install
- Fixes and maintains the weight of ERIFLEX FLEXIBAR range
- Facilitates cooling



UFS KIT SUPPORT

Assembly comprised of a 2 m aluminum section and 24 retaining blocks made of glass-reinforced halogen-free polyamide.


- Possible to make up 3 supports, 650 mm long each for 4 ERIFLEX FLEXIBAR range
- Recommended distance between clamps: 400 mm max.



Part No.	Description		Kg
553590	UFS Kit	1	2,3

FS SPACER CLAMP

- Ensures correct support for ERIFLEX FLEXIBAR range, IBSB & IBSBR in parallel, without damage to the insulation.
- Maintains correct space for optimum cooling.
- 4 ERIFLEX FLEXIBAR range in parallel maximum
- UL 67
- Recommended distance between clamps: 400 mm

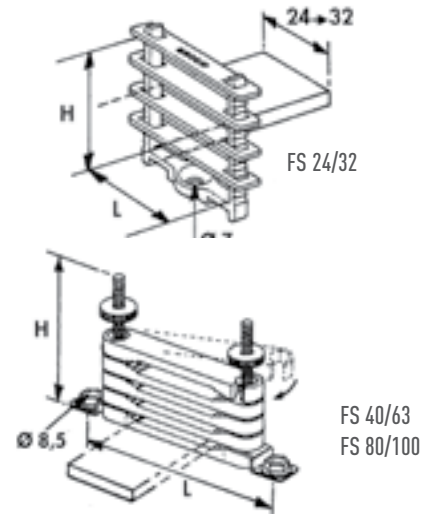


Part No.	Description	Type*	H mm	L mm		Kg
553550	FS 24	=< 24 mm	53	30	25	0,015
553560	FS 32	=< 32 mm	53	38	25	0,018
553570	FS 40-63	40-50 & 63 mm	95	150	10	0,100
553580	FS 80-100	80/100 mm	140	200	10	0,250

* Type of ERIFLEX FLEXIBAR and IBS/IBSB/IBSBR


RFS REINFORCED SUPPORT

- Allows up to 8 ERIFLEX FLEXIBAR range in parallel.
- Easy mounting in the panel. (25 mm pitch)
- Recommended distance between clamps: 400 mm



Part No.	Description	A mm	B mm	C mm	D mm	TS	ERIFLEX TS FLEXIBAR H mm		Kg
553370	RFS 40-63	150	175	90	120	M8	40=>63	1	0,932
553380	RFS 80-100	200	225	140	170	M10	80=>100	1	1,430

ACCESSORIES

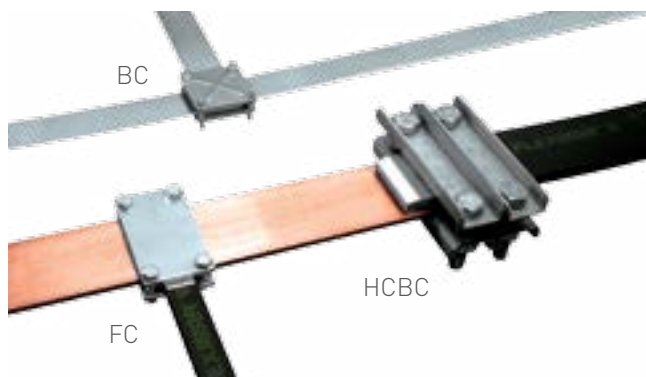

CONNECTING CLAMPS

- Excellent electrical contact
- Saves space
- Fast installation
- Ideal for "on site" modifications

FC CLAMP


- Clamping capacity: 20 mm
- 2 zinc plated steel plates complete with M8 screws 8.8 class



Part No.	Description	A mm	B mm	C mm	D mm	E mm	F mm	Torque N.m		Kg
553020	FC 50 x 24	50	20-24	60	36	75	52	10	3	0,319
553030	FC 50 x 32	50	32	60	44	75	60	10	3	0,362
553040	FC 50 x 40	50	40	60	52	75	68	10	3	0,412
553050	FC 80 x 24	80	20-24	90	36	105	52	10	3	0,432
553060	FC 80 x 32	80	32	90	44	105	60	10	3	0,492
553070	FC 80 x 50	80	50	90	62	105	78	10	3	0,642
568700	FC 100 x 32	100	32	110	44	125	60	10	3	0,670
568730	FC 120 x 32	120	32	130	44	145	60	10	3	0,760

BC RIBBED-STEEL BUSBAR CLAMP


- Clamping capacity: 20 mm
- 2 ribbed zinc-plated hardened-steel plates complete with screws
- Maximum clamping capacity is 50 mm using longer screws 8.8 class
- UL 67 recognized



Part No.	Description	A mm	B mm	C mm	Ø mm	Torque N.m		Kg
553200	BC 30	56	42	30	M6	7	8	0,31
553210	BC 40	66	52	40	M6	7	8	0,37
553220	BC 50	83	64	50	M8	20	8	0,59
553230	BC 63	93	74	63	M8	20	4	0,74
553250	BC 80	118	96	80	M10	40	4	0,118
553260	BC 100	144	118	100	M10	40	4	1,72

HCBC HIGH CURRENT BUSBAR CLAMP

- Clamping capacity: 40 mm
- This modular busbar clamp is designed with non-magnetic materials for high current connections between ERIFLEX FLEXIBAR range and rigid busbars such as transformer terminals
- Design assures rigidity and even contact pressure
- Use 2 clamps to guarantee the contact pressure

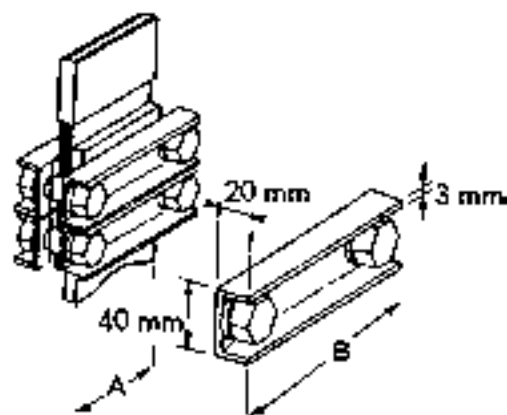

Part No.	Description	A mm	B mm	Torque N.m		Kg
553100	HSBC 80	80	140	100	1	0,84
553110	HSBC 100	100	160	100	1	0,92
553120	HSBC 120	120	180	100	1	1,00

ACCESSORIES



FBC


CONNECTORS FOR CONNECTING WITHOUT DRILLING

- Very compact for connection without drilling to a 5 mm or 10 mm thick busbar
- Cables from 1 mm² up to 185 mm² or ERIFLEX FLEXIBAR range width 6 mm to 20 mm
- Self-support of connector during mounting procedure
- IEC 60 999

ERIFLEX FLEXIBAR TYPE



Connectors for busbar thickness 5 mm

Part No.	Description	A mm	B mm	C mm	ERIFLEX FLEXIBAR Type (mm)	Torque N.m	Cable Size mm ²		 Kg
553405	FBC 5 x 4	23	29	11	-	2	1 - 4	15	0,016
553400	FBC 5 x 6	28	31	14	6	3	2,5 - 16	15	0,028
553410	FBC 5 x 9	36	40	19	9	6-8	16 - 50	15	0,068
553510	FBC 5 x 15,5	44	40	25	15,5	10-12	35 - 70	15	0,110
553520	FBC 5 x 20	48	40	31	20	12-15	70 - 185	15	0,132



Connectors for busbar thickness 10 mm

Part No.	Description	A mm	B mm	C mm	ERIFLEX FLEXIBAR Type (mm)	Torque N.m	Cable Size mm ²		 Kg
553505	FBC 10 x 4	28	29	12	-	2	1 - 4	15	0,018
553430	FBC 10 x 6	33	31	14	6	3	2,5 - 16	15	0,030
553440	FBC 10 x 9	42	40	19	9	6 - 8	16 - 50	15	0,070
553530	FBC 10 x 15,5	49	40	25	15,5	10 - 12	35 - 70	15	0,112
553540	FBC 10 x 20	54	40	31	20	12 - 15	70 - 185	15	0,138



QCC CLAMPS

- For ERIFLEX FLEXIBAR thickness < 5 mm = 1 clamp
- For ERIFLEX FLEXIBAR thickness > 5 mm = 2 clamps

Part No.	Description	ERIFLEX FLEXIBAR width		L mm	F mm		 Kg
		min. mm	max. mm				
561210	QCC 15,5/32	15,5	32	70	50	5	0,112
561220	QCC 40/63	40	63	95	75	5	0,158

CONT KIT METAL NUTS AND BOLTS

Contact Kit

- Enhanced electrical contact
- 100 nuts - 100 bolts - 200 flat washers
- 200 contact washers (class 8/8 ZN8C protection)




Part No.	Description	Dimensions	Torque N.m		 Kg
558310	Cont Kit M6 x 16	HM 6 x 16	13	100	0,012
558340	Cont Kit M8 x 30	HM 8 x 30	30	100	0,028
558370	Cont Kit M10 x 30	HM 10 x 30	60	100	0,052
558410	Cont Kit M10 x 50	HM 10 x 50	60	100	0,062
558440	Cont Kit M12 x 30	HM 12 x 30	110	100	0,081
558460	Cont Kit M12 x 40	HM 12 x 40	110	100	0,091
558480	Cont Kit M12 x 50	HM 12 x 50	110	100	0,097
567880	Cont Kit M12 x 60	HM 12 x 60	110	100	0,116
558490	Cont Kit M12 x 80	HM 12 x 80	110	100	0,150

ERIFLEX FLEXIBAR HYDRAULIC WORK CENTER



To discover our full range of tools, please request a copy of our specific "Hydraulic & Manual Tools" brochure, or download it from this QR code.



Hydraulic Busbar &
ERIFLEX FLEXIBAR Puncher



Hydraulic Busbar Bender



Hydraulic Busbar Cutter



Shearing Tool Ruler



Hydraulic Pump & Foot Controller




Hydraulic ERIFLEX FLEXIBAR
Shearing Tool



Shearing Tool Guide

ERIFLEX FLEXIBAR MANUAL WORK CENTER

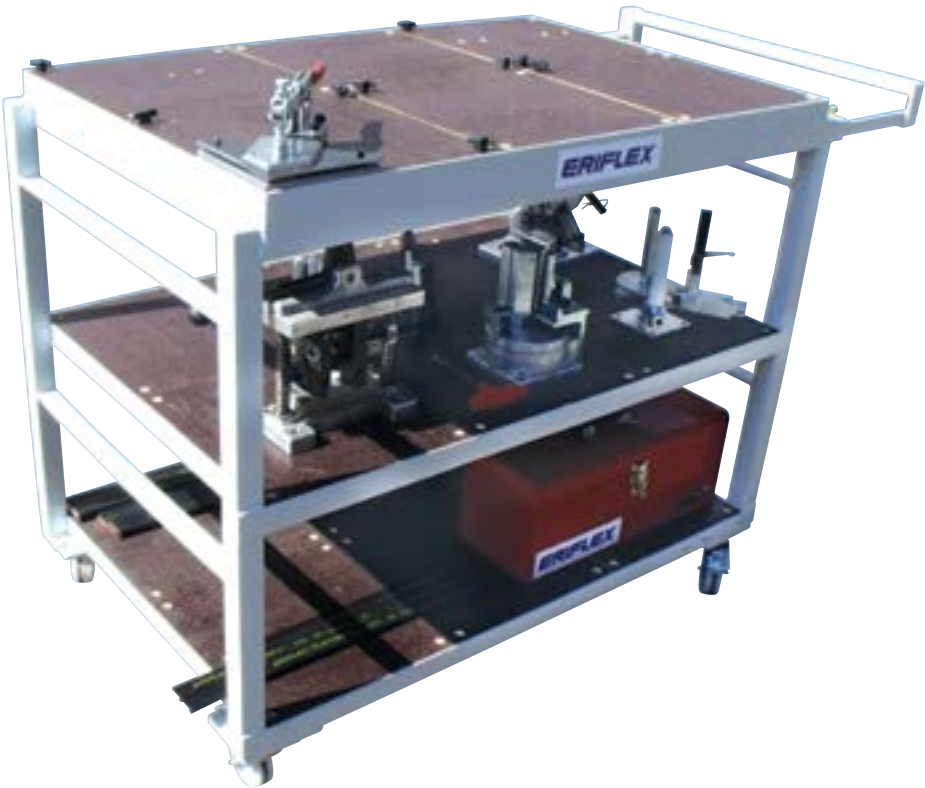

Shearing Tools



Bending Tools



Twisting Tool



Drilling Tool



Folding Tool



Stripping Tool



Stripping Knife



Bending Tool

INSULATED BRAIDED CONDUCTOR (IBSB & IBSBR)



Insulated braided conductors suitable for all the main molded case circuit breakers worldwide.




IDEAL CONNECTION FOR MOLDED CASE CIRCUIT BREAKERS

The IBSB and IBSBR range can be used as an alternative to cable for all low-voltage power applications. It is suitable and connectable for molded case circuit breaker ranges, including most compact breakers on the market. From 80 A up to 630 A circuit breakers, you can directly connect the IBSB/IBSBR on the front access terminals breaker without additional accessories, such as angular connectors, spreaders, ring terminal connectors or extenders. No lugs and no cutting, stripping, or crimping are necessary.

Very simple! Very quick! Ready to use!

INSULATED BRAIDED CONDUCTOR TECHNICAL FEATURES

- IBSB and IBSBR are specially designed and developed to be suitable and connectable for molded case circuit breaker ranges, including most compact breakers on the market
- IBSB and IBSBR are formed with high-quality electrolytic copper wire (diameter 0,15 mm for maximum flexibility)
- Material savings: Integral palm without lugs or terminals
- Quick and easy to install: Ready to use. No cutting, stripping, crimping or punching. Time saving for installation
- Weight savings: A flat braid weights less than a cable (with insulation) and lugs. Offers better copper usage (Skin Effect)
- The insulation is a high-resistance self-extinguishing PVC –105°C working temperature maximum
- Full application range: 80 A to 630 A [section 25, 50, 70, 100, 120, 185 and 240 mm²], with 230 up to 1030 mm length
- Reliability – No extra contact due to the lugs being crimped at the extremities of the cables. Integral palm without tin addition or crimped lug for an excellent electrical contact.
- Resistant to vibration - ideal alternative to cable

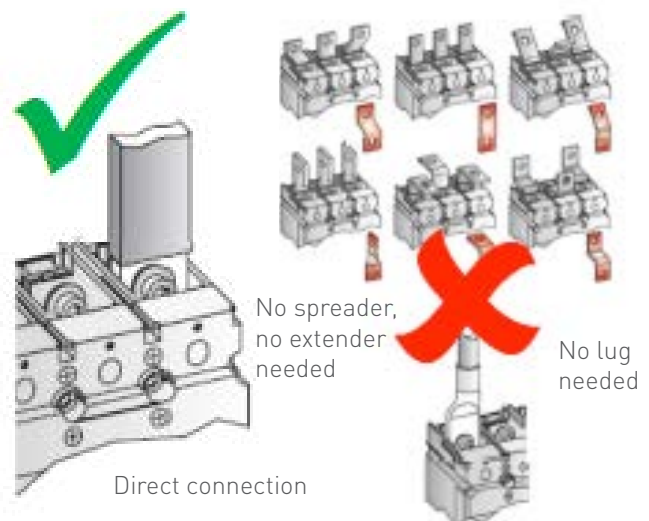



THE OPTIMIZED ALTERNATIVE TO CABLE - READY TO USE.




ERIFLEX has developed a unique, state-of-the-art manufacturing line to massivate directly the palms of IBSB and IBSBR braids.

This innovative manufacturing process provides an effective electrical contact, due to the integral palms, without the addition of tin or crimped lugs. This process welds the flexible braid and brings back a solid tinned or red copper block as a palm. Unlike the traditional press-welded palms process, ERIFLEX's process is suitable for red copper, and tinned plated copper. The electrical contact between each wire is optimized.

This ERIFLEX process also helps to eliminate moisture issues in the palms. By using crimped lugs in a severe environment, moisture can enter in the lug (often by capillarity) and create corrosion between each wire. After several years, the electrical contact between each wire can deteriorate and alter the electrical conductivity of the equipment. The corrosion in the palm is impossible to remove without changing the element.

This process produces RoHS products; no additional substances are added to the tinned-plated wires during the manufacturing process.

INSULATED BRAIDED CONDUCTOR (IBSB & IBSBR)

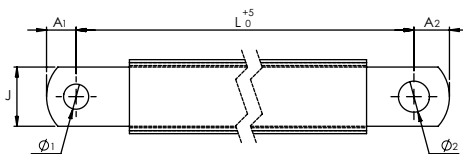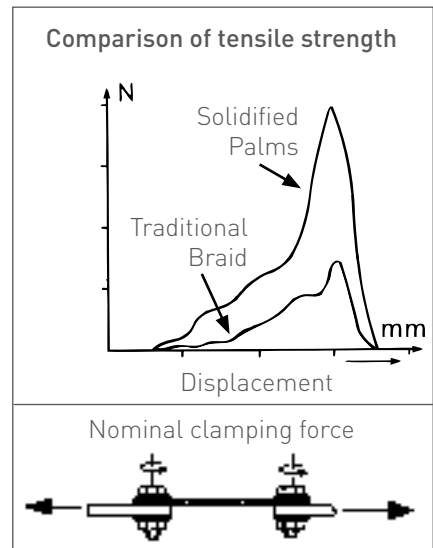

TECHNICAL DATA

- Excellent electrical contact with integral palm construction
- Good tensile strength

Insulation

- High resistance: vinyl compound
- Maximum working temperature: 105° C
- Self-extinguishable: UL 94 V0
- Dielectric strength: 20 kV/mm
- Max. working voltage: 1000 V AC-1500 V DC-IEC & UL 758
- Max. working voltage: 600V AC/DC – UL 67
- Class II Conductors (IEC 61439-1, Chapter 8.4.4 Protection by total insulation)

Braid








- Tinned (IBSB 25-50-70-100) or red (IBSBR 120-185-240) electrolytic copper
- Wire diameter: 0.15 mm for maximum flexibility - According to EN 13602
- Upper resistance to vibration

CERTIFICATION & APPROVALS

- IEC 60439.1 & IEC 61439.1
- cRUus per UL67 & CAN/CSA C22.2 No. 29 (File E125470)
- RU per UL758 (E316390)
- CE conformity
- RoHS compliant
- American Bureau of Shipping (ABS) - Certificate No. 13-HS1070074-PDA - Marine & Offshore Applications
- Bureau Veritas Marine and offshore division for classification of steel ships and according to IEC 60092
- CSA C22.2 No 210 for appliance wiring material products
- EAC



INSULATED BRAIDED CONDUCTORS TECHNICAL CHARACTERISTICS

Use with circuit breaker	Part Number	Description	S mm ²	L mm	Ø1 mm	Ø2 mm	A1 mm	A2 mm	J mm	M mm	K1 mm	K2 mm		 Kg
IBSB - Tinned Copper														
125/160A 	558500	IBSB 25-230-6	25	230	6,5	6,5	7,5	7,5	12	2,8	9	18	10	0,08
	558501	IBSB 25-330-6	25	330	6,5	6,5	7,5	7,5	12	2,8	9	18	10	0,11
	558502	IBSB 25-430-6	25	430	6,5	6,5	7,5	7,5	12	2,8	9	18	10	0,15
	558503	IBSB 25-530-6	25	530	6,5	6,5	7,5	7,5	12	2,8	9	18	10	0,18
	558504	IBSB 25-630-6	25	630	6,5	6,5	7,5	7,5	12	2,8	9	18	10	0,22
	558505	IBSB 25-830-6	25	830	6,5	6,5	7,5	7,5	12	2,8	9	18	10	0,28
	558506	IBSB 25-1030-6	25	1030	6,5	6,5	7,5	7,5	12	2,8	9	18	10	0,35
250A 	558507	IBSB 50-230-8-10	50	230	8,5	10,5	9	11	20	3	9	27	10	0,15
	558508	IBSB 50-330-8-10	50	330	8,5	10,5	9	11	20	3	9	27	10	0,21
	558509	IBSB 50-430-8-10	50	430	8,5	10,5	9	11	20	3	9	27	10	0,27
	558510	IBSB 50-530-8-10	50	530	8,5	10,5	9	11	20	3	9	27	10	0,33
	558511	IBSB 50-630-8-10	50	630	8,5	10,5	9	11	20	3	9	27	10	0,39
	558512	IBSB 50-830-8-10	50	830	8,5	10,5	9	11	20	3	9	27	10	0,52
	558513	IBSB 50-1030-8-10	50	1030	8,5	10,5	9	11	20	3	9	27	10	0,64
300A 	558514	IBSB 70-230-8-10	70	230	8,5	10,5	9	11	20	4,3	11	27	10	0,197
	558515	IBSB 70-330-8-10	70	330	8,5	10,5	9	11	20	4,3	11	27	10	0,28
	558516	IBSB 70-430-8-10	70	430	8,5	10,5	9	11	20	4,3	11	27	10	0,362
	558517	IBSB 70-530-8-10	70	530	8,5	10,5	9	11	20	4,3	11	27	10	0,444
	558518	IBSB 70-630-8-10	70	630	8,5	10,5	9	11	20	4,3	11	27	10	0,527
	558519	IBSB 70-830-8-10	70	830	8,5	10,5	9	11	20	4,3	11	27	10	0,692
	558520	IBSB 70-1030-8-10	70	1030	8,5	10,5	9	11	20	4,3	11	27	10	0,857
350A 	558521	IBSB 100-230-8-10	100	230	8,5	10,5	9	11	24	5	13	31	10	0,27
	558522	IBSB 100-330-8-10	100	330	8,5	10,5	9	11	24	5	13	31	10	0,39
	558523	IBSB 100-430-8-10	100	430	8,5	10,5	9	11	24	5	13	31	10	0,50
	558524	IBSB 100-530-8-10	100	530	8,5	10,5	9	11	24	5	13	31	10	0,62
	558525	IBSB 100-630-8-10	100	630	8,5	10,5	9	11	24	5	13	31	10	0,73
	558526	IBSB 100-830-8-10	100	830	8,5	10,5	9	11	24	5	13	31	10	0,96
	558527	IBSB 100-1030-8-10	100	1030	8,5	10,5	9	11	24	5	13	31	10	1,19
IBSBR - Red Copper														
400A 	558528	IBSBR 120-230-10	120	230	10,5	10,5	11	11	32	4,4	12	39	2	0,33
	558529	IBSBR 120-330-10	120	330	10,5	10,5	11	11	32	4,4	12	39	2	0,47
	558530	IBSBR 120-430-10	120	430	10,5	10,5	11	11	32	4,4	12	39	2	0,6
	558531	IBSBR 120-530-10	120	530	10,5	10,5	11	11	32	4,4	12	39	2	0,74
	558532	IBSBR 120-630-10	120	630	10,5	10,5	11	11	32	4,4	12	39	2	0,88
	558533	IBSBR 120-830-10	120	830	10,5	10,5	11	11	32	4,4	12	39	2	1,15
	558534	IBSBR 120-1030-10	120	1030	10,5	10,5	11	11	32	4,4	12	39	2	1,43
500A 	558535	IBSBR 185-330-10-12	185	330	10,5	12,5	12	14	32	7,1	16	39	2	0,7
	558536	IBSBR 185-430-10-12	185	430	10,5	12,5	12	14	32	7,1	16	39	2	0,9
	558537	IBSBR 185-530-10-12	185	530	10,5	12,5	12	14	32	7,1	16	39	2	1,1
	558538	IBSBR 185-630-10-12	185	630	10,5	12,5	12	14	32	7,1	16	39	2	1,3
	558539	IBSBR 185-830-10-12	185	830	10,5	12,5	12	14	32	7,1	16	39	2	1,7
	558540	IBSBR 185-1030-10-12	185	1030	10,5	12,5	12	14	32	7,1	16	39	2	2,1
630A 	558541	IBSBR 240-330-10-12	240	330	10,5	12,5	12	14	32	9,2	18,5	39	2	0,89
	558542	IBSBR 240-430-10-12	240	430	10,5	12,5	12	14	32	9,2	18,5	39	2	1,14
	558543	IBSBR 240-530-10-12	240	530	10,5	12,5	12	14	32	9,2	18,5	39	2	1,4
	558544	IBSBR 240-630-10-12	240	630	10,5	12,5	12	14	32	9,2	18,5	39	2	1,65
	558545	IBSBR 240-830-10-12	240	830	10,5	12,5	12	14	32	9,2	18,5	39	2	2,16
	558546	IBSBR 240-1030-10-12	240	1030	10,5	12,5	12	14	32	9,2	18,5	39	2	2,67

INSULATED BRAIDED CONDUCTOR (IBS)



IBS 25
IBS 50

IBS 120
IBS 185
IBS 240



TECHNICAL DATA

- Intensity = 100A up to 1000A
- Excellent electrical contact
- Good tensile strength

INSULATION

- High resistance : vinyl compound
- Max. working temperature : 105°C
- Self-extinguishable: UL 94 VO
- Dielectric strength: 20 kV/mm
- Max. working voltage: 1000 V AC-1500 V DC-IEC & UL 758
- Max. working voltage: 600V AC/DC – UL 67

BRAID

- Tinned electrolytic copper for better corrosion protection
- Wire diameter: 0.15 mm for maximum flexibility
- Strong resistance to vibration

CERTIFICATION & APPROVAL

- IEC 60439.1 & IEC 61439.1
- cRUus per UL67 & CAN/CSA C22.2 No. 29
- CE conformity
- RoHS compliant
- RU per UL758
- American Bureau of Shipping (ABS)
- CSA C22.2 No 210 for appliance wiring material products

DIELECTRIC TEST

- 3500 VAC, 1 minute according to the IEC 60439.1 standard (rated insulation voltage U_i 1000 VAC)
- 6000 VAC, 1 minute with 6 mA creepage current set up


FEATURES

- The ideal alternative to cable
- No cutting, no stripping, no crimping
- More flexible connection
- Pre-punched: ready to use
- Quick and easy to install
- Excellent electrical contact
- Tinned electrolytic copper for better corrosion protection
- Strong resistance to vibration
- Volume reduction inside the panel board



INSULATED BRAIDED CONDUCTOR (IBS)


IBS 25
IBS 50

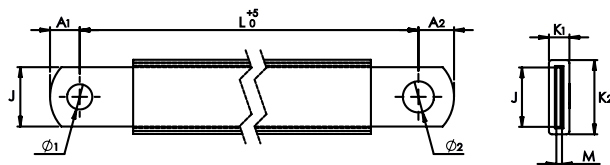

	Part No.	IBS 25	S mm ²	L mm	Ø1 mm	Ø2 mm	A1 mm	A2 mm	J mm	M mm	K1 mm	K2 mm		Kg
160 A	558240	IBS 25-230-8-10	25	230	8,5	10,5	10	12	20	1,9	6	25	10	0,095
	558241	IBS 25-330-8-10	25	330	8,5	10,5	10	12	20	1,9	6	25	10	0,14
	558242	IBS 25-430-8-10	25	430	8,5	10,5	10	12	20	1,9	6	25	10	0,17
	558243	IBS 25-530-8-10	25	530	8,5	10,5	10	12	20	1,9	6	25	10	0,21
	558244	IBS 25-630-8-10	25	630	8,5	10,5	10	12	20	1,9	6	25	10	0,25
	558249	IBS 25-830-8-10	25	830	8,5	10,5	10	12	20	1,9	6	25	10	0,33
	558250	IBS 25-1030-8-10	25	1030	8,5	10,5	10	12	20	1,9	6	25	10	0,41

	Part No.	IBS 50	S mm ²	L mm	Ø1 mm	Ø2 mm	A1 mm	A2 mm	J mm	M mm	K1 mm	K2 mm		Kg
250 A	558260	IBS 50-230-10	50	230	10,5	10,5	12	12	20	3,8	7,5	25	10	0,16
	558261	IBS 50-330-10	50	330	10,5	10,5	12	12	20	3,8	7,5	25	10	0,22
	558262	IBS 50-430-10	50	430	10,5	10,5	12	12	20	3,8	7,5	25	10	0,29
	558263	IBS 50-530-10	50	530	10,5	10,5	12	12	20	3,8	7,5	25	10	0,35
	558264	IBS 50-630-10	50	630	10,5	10,5	12	12	20	3,8	7,5	25	10	0,41
	558255	IBS 50-830-10	50	830	10,5	10,5	12	12	20	3,8	7,5	25	10	0,53
	558256	IBS 50-1030-10	50	1030	10,5	10,5	12	12	20	3,8	7,5	25	10	0,65

IBS 120
IBS 185
IBS 240

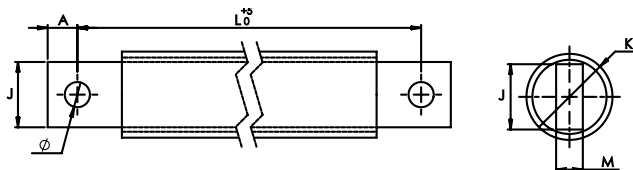

	Part No.	IBS 120	S mm ²	L mm	Ø mm	A mm	J mm	M mm	K mm		Kg
400 A	558270	IBS 120-330-10	120	330	10,5	12	24	10	27	2	0,51
	558271	IBS 120-430-10	120	430	10,5	12	24	10	27	2	0,67
	558272	IBS 120-530-10	120	530	10,5	12	24	10	27	2	0,82
	558273	IBS 120-630-10	120	630	10,5	12	24	10	27	2	0,98
	558274	IBS 120-830-10	120	830	10,5	12	24	10	27	2	1,29
	558276	IBS 120-1030-10	120	1030	10,5	12	24	10	27	2	1,6

	Part No.	IBS 185	S mm ²	L mm	Ø mm	A mm	J mm	M mm	K mm		Kg
500 A	558290	IBS 185-330-10	185	330	10,5	12	24	15	31	2	0,82
	558291	IBS 185-430-10	185	430	10,5	12	24	15	31	2	1,07
	558292	IBS 185-530-10	185	530	10,5	12	24	15	31	2	1,26
	558293	IBS 185-630-10	185	630	10,5	12	24	15	31	2	1,48
	558294	IBS 185-830-10	185	830	10,5	12	24	15	31	2	1,9
	558295	IBS 185-1030-10	185	1030	10,5	12	24	15	31	2	2,3

	Part No.	IBS 240	S mm ²	L mm	Ø mm	A mm	J mm	M mm	K mm		Kg
630 A	558280	IBS 240-330-12	240	330	12,5	13	32	15	36	2	1,03
	558281	IBS 240-430-12	240	430	12,5	13	32	15	36	2	1,34
	558282	IBS 240-530-12	240	530	12,5	13	32	15	36	2	1,65
	558283	IBS 240-630-12	240	630	12,5	13	32	15	36	2	1,96
	558284	IBS 240-830-12	240	830	12,5	13	32	15	36	2	2,58
	558285	IBS 240-1030-12	240	1030	12,5	13	32	15	36	2	3,2

IBSHY INSULATED BRAIDED CONDUCTOR FOR COMPACT CIRCUIT BREAKERS




FEATURES

- Suitable for all main 125/160 A electrical devices and specifically molded case circuit breakers
- Resistant to vibration, improving reliability and performance
- Improves assembly flexibility and aesthetics
- Quick and easy installation
- No additional cutting, stripping, crimping and punching needed
- Small wire diameter provides maximum flexibility
- Halogen-free solution for applications requiring a low smoke solution
- Conforms to NF EN 45545 obtaining an HL2 classification for chapters R22 and R23
- High working temperature
- RoHS compliant

IBSHY INSULATED BAIDED CONDUCTOR SPECIFICATIONS

- Typical Application Current Rating: 160 A
- Finish: Tinned
- Material: Copper; Glass Fibre Reinforced Silicon
- Flammability Rating: UL 1441 VW-1
- Max Working Voltage, IEC (Ui): 1 000 VAC; 1 500 VDC
- Operating Temperature: from -60 °C to 250 °C
- Wire Diameter: 0,15 mm
- IEC 60439-1; IEC 61439-1 compliant

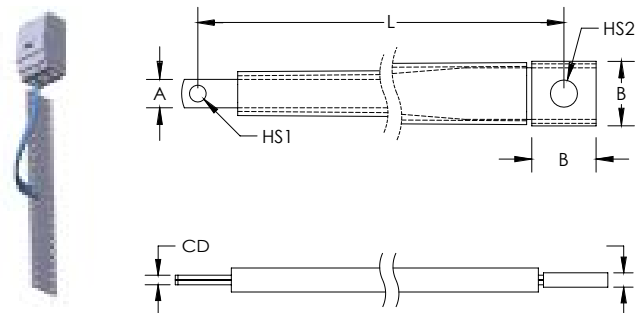



IBSHY INSULATED BAIDED CONDUCTOR TECHNICAL CHARACTERISTICS

Part No.	Article No.	Cross Section	Length L	A	B	C	D	Hole Size 1 HS1	Hole Size 2 HS2
IBSHY32-230	558584	32 mm ²	230 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-330	558586	32 mm ²	330 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-365	558587	32 mm ²	365 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-430	558588	32 mm ²	430 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-500	558589	32 mm ²	500 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-565	558591	32 mm ²	565 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-630	558592	32 mm ²	630 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-700	558593	32 mm ²	700 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-765	558594	32 mm ²	765 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm
IBSHY32-830	558595	32 mm ²	830 mm	11 mm	25 mm	3 mm	5 mm	6.5 mm	10.5 mm

Maximum Ampacity Ratings															
Cross Section (mm²/ kcmil)	ΔT 30° C (A)	ΔT 35° C (A)	ΔT 40° C (A)	ΔT 45° C (A)	ΔT 50° C (A)	ΔT 55° C (A)	ΔT 60° C (A)	ΔT 65° C (A)	ΔT 70° C (A)	ΔT 75° C (A)	ΔT 80° C (A)	ΔT 100° C (A)	ΔT 120° C (A)	2 Bar Current Coefficient	3 Bar Current Coefficient
32/63.15	142	153	164	174	184	193	201	209	217	225	235	263	290	1.6	2

ΔT = Temperature of conductors – Internal temperature of panel.

This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

INSULATED BRAIDED CONDUCTOR (IBS, IBSB, IBSBR & IBSHY)



Insulated Braided conductor type	Section mm ²	ΔT (K)							Current Coefficient	
		30	40	45	50	55	60	70		
IBS 25	25	137	158	167	177	185	193	209	1,6	2
IBSB 25	25	116	134	142	150	157	164	177	1,6	2
IBS 50	50	213	246	260	274	288	301	325	1,6	2
IBSB 50	50	213	246	260	274	288	301	325	1,6	2
IBSB 70	70	226	261	277	291	306	319	345	1,6	2
IBSB 100	100	298	344	365	385	404	422	456	1,6	2
IBS 120	120	325	376	398	420	441	460	497	1,6	
IBSBR 120	120	363	419	444	468	491	513	554	1,6	2
IBS 185	185	407	470	499	526	552	576	622	1,6	
IBSBR 185	185	416	480	509	537	563	588	635	1,6	2
IBS 240	240	488	563	598	630	661	690	745	1,6	
IBSBR 240	240	556	642	681	718	753	786	849	1,6	2

ADMISSIBLE CURRENTS: This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

TEMPERATURE RISE OF CONDUCTOR = $T_2 - T_1 = \Delta T$ (K)

Ex.: For a current of 630A, with:

$T_1 = 40^\circ\text{C} - T_2 = 90^\circ\text{C}$

1) $\Delta T = 90 - 40 = 50\text{K}$

2) In the 50°K column, find the closest current value to 630A.

K = Kelvin degree (temperature calculated, but not measurable.)

INSULATED BRAIDED CONDUCTOR IN PARALLEL


When using 2 or 3 insulated braided conductors in parallel for the same phase, use the current coefficient:

Ex.: IBSB 100 - $\Delta T^\circ = 50\text{K}$: 385 A

2 braids in parallel > $385 \text{ A} \times 1,6 = 616 \text{ A}$


3 braids in parallel > $385 \text{ A} \times 2 = 770 \text{ A}$

Selection of insulated braided conductor IBS, IBSB & IBSBR according to the internal temperature of the panel.

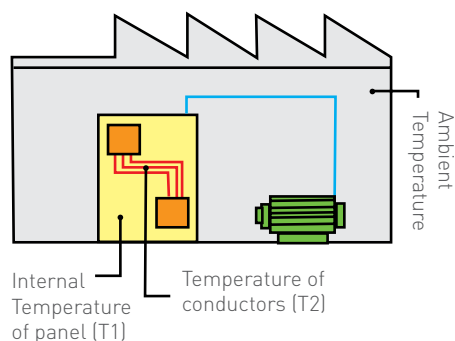




ASSEMBLY INSTRUCTIONS

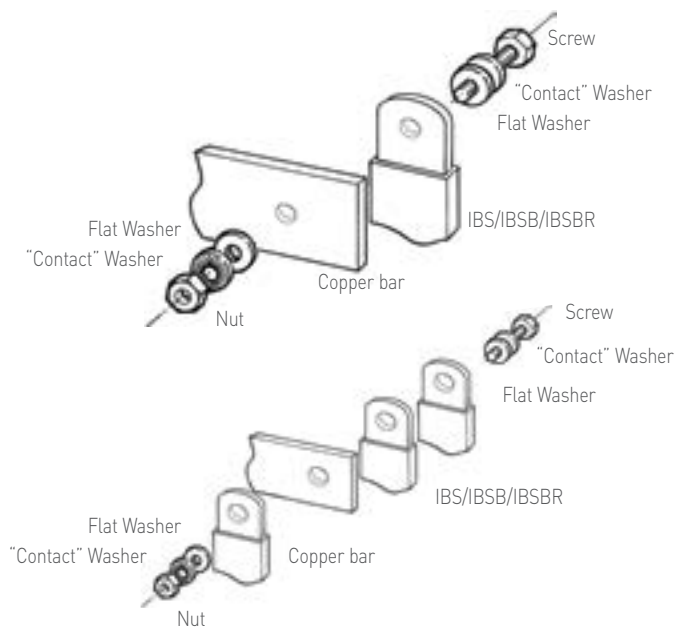

Space between 2 or 3 insulated braided conductors in parallel, for cooling.
A minimum air gap is required. Use FS type spacer clamp.

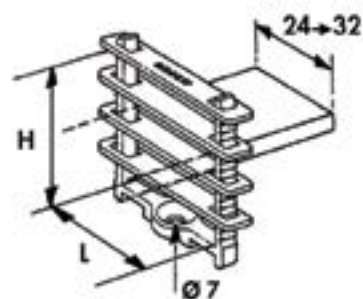

Designation	Part No.	For insulated braided conductor type
FS 24	553550	IBS 25 / 50
		IBSB 25 / 50 / 70 / 100
FS 32	553560	IBSBR 120 / 185 / 240

EARTH/GROUND COPPER BRAIDS (MBJ & BJ)



INNOVATIVE, STATE-OF-THE-ART MANUFACTURING PROCESS.

ERIFLEX manufacturing directly massivates the palms of the MBJ tinned-plated braids. This manufacturing process provides an effective electrical contact, due to the integral palms, without the addition of tin or crimped lugs.

This process welds the flexible braid and brings back a solid tinned or red copper block as a palm. Unlike the traditional press-welded palms process, ERIFLEX's process is suitable for red copper, but also for tin plated copper. The electrical contact between each wire is optimized.

This ERIFLEX process also helps eliminate moisture issues in the palms. By using crimped lugs in a severe environment, moisture can enter in the lug (often by capillarity) and create corrosion between each wire. After several years, the electrical contact between each wire can deteriorate and alter the electrical conductivity of the equipment. The corrosion in the palm is impossible to remove without changing the element.

This process produces RoHS products; no additional substances are added to the tinned-plated wires during the manufacturing process.

BJ

Round braids with crimped lugs



Part No.	Description	Section mm	L mm	Ø D mm	Intensity A		 Kg
556900	BJ 6-150 S	6	150	6,5	45	10	0,010
556910	BJ 6-200 S	6	200	6,5	45	10	0,015
556920	BJ 10-300 S	10	300	6,5	75	10	0,033

TINNED COPPER EARTH/GROUND BRAIDS TECHNICAL FEATURES



With integral palm

- A complete range of earth/ground flexible connections from 6 to 100 mm² section and from 100 to 500 mm length
- Strong resistance to vibration and fatigue
- Reliable: No extra contact due to the lugs crimped at the ends of the cable
- Weight savings: A flat braid weighs less than a cable (with insulation) and lugs and offers better copper usage (skin effect)
- Integral palm, without tin or crimped lugs for superior electrical contact and tensile strength resistance
- Quick and easy to install: Ready to use. No cutting, stripping, crimping or punching. Less labor time for installation
- Material savings: no lugs or terminals
- Recommended by the EMC/EMI directives and less impedance than cables



EARTH/GROUND COPPER BRAIDS (MBJ & BJ) TECHNICAL CHARACTERISTICS

Part Number	Description	Intensity A	Thickness mm	Section mm ²	L mm	Ø mm	J mm	T mm		 Kg
556600	MBJ 6-150-6	40	1,1	6	150	6,5	11	18	10	0,01
563410	MBJ 6-200-6	40	1,1	6	200	6,5	11	18	10	0,0167
556930	MBJ 10-200-6	75	1,1	10	200	6,5	11	18	10	0,022
556610	MBJ 10-300-6	75	1,1	10	300	6,5	11	18	10	0,033
563540	MBJ 16-100-6	120	1,5	16	100	6,5	15	20	10	0,018
556620	MBJ 16-100-8	120	1,5	16	100	8,5	15	20	10	0,018
563550	MBJ 16-150-6	120	1,5	16	150	6,5	15	20	10	0,035
556630	MBJ 16-150-8	120	1,5	16	150	8,5	15	20	10	0,035
563300	MBJ 16-200-6	120	1,5	16	200	6,5	15	20	10	0,033
556640	MBJ 16-200-8	120	1,5	16	200	8,5	15	20	10	0,033
556650	MBJ 16-250-8	120	1,5	16	250	8,5	15	20	10	0,04
563320	MBJ 16-300-6	120	1,5	16	300	6,5	15	20	10	0,05
556660	MBJ 16-300-8	120	1,5	16	300	8,5	15	20	10	0,05
556940	MBJ 16-500-8	120	1,5	16	500	8,5	15	20	10	0,082
556670	MBJ 25-100-10	150	1,5	25	100	10,5	22	28	10	0,027
556680	MBJ 25-150-10	150	1,5	25	150	10,5	22	28	10	0,039
563340	MBJ 25-200-6	150	1,5	25	200	6,5	22	28	10	0,052
556690	MBJ 25-200-10	150	1,5	25	200	10,5	22	28	10	0,052
563430	MBJ 25-200-12	150	1,5	25	200	12,5	22	28	10	0,052
556700	MBJ 25-250-10	150	1,5	25	250	10,5	22	28	10	0,064
556710	MBJ 25-300-10	150	1,5	25	300	10,5	22	28	10	0,077
556950	MBJ 25-500-10	150	1,5	25	500	10,5	22	28	10	0,13
556720	MBJ 30-100-10	180	2	30	100	10,5	22	28	10	0,032
556730	MBJ 30-150-10	180	2	30	150	10,5	22	28	10	0,047
556740	MBJ 30-200-10	180	2	30	200	10,5	22	28	10	0,062
556750	MBJ 30-250-10	180	2	30	250	10,5	22	28	10	0,075
556760	MBJ 30-300-10	180	2	30	300	10,5	22	28	10	0,092
556960	MBJ 30-500-10	180	2	30	500	10,5	22	28	10	0,155
556770	MBJ 35-100-10	197	2,1	35	100	10,5	22	28	10	0,037
556780	MBJ 35-150-10	197	2,1	35	150	10,5	22	28	10	0,054
556790	MBJ 35-200-10	197	2,1	35	200	10,5	22	28	10	0,072
556800	MBJ 35-250-10	197	2,1	35	250	10,5	22	28	10	0,089
565000	MBJ 35-250-25	197	1,5	35	250	25,5	40	45	10	0,089
556810	MBJ 35-300-10	197	2,1	35	300	10,5	22	28	10	0,11
556970	MBJ 35-500-10	197	2,1	35	500	10,5	22	28	10	0,18
556820	MBJ 50-100-10	250	2,5	50	100	10,5	28	33	10	0,052
556830	MBJ 50-150-10	250	2,5	50	150	10,5	28	33	10	0,077
563350	MBJ 50-200-6	250	2,5	50	200	6,5	28	33	10	0,12
556840	MBJ 50-200-10	250	2,5	50	200	10,5	28	33	10	0,12
563440	MBJ 50-200-12	250	2,5	50	200	12,5	28	33	10	0,12
563360	MBJ 50-200-16	250	2,5	50	200	16,5	28	33	10	0,11
563370	MBJ 50-200-18	250	2,5	50	200	18,5	28	33	10	0,11
556850	MBJ 50-250-10	250	2,5	50	250	10,5	28	33	10	0,127
563380	MBJ 50-300-6	250	2,5	50	300	6,5	28	33	10	0,15
556860	MBJ 50-300-10	250	2,5	50	300	10,5	28	33	10	0,153
563390	MBJ 50-300-16	250	2,5	50	300	16,5	28	33	10	0,15
563400	MBJ 50-300-18	250	2,5	50	300	18,5	28	33	10	0,14
556980	MBJ 50-500-10	250	2,5	50	500	10,5	28	33	10	0,255
563560	MBJ 50-500-12	250	2,5	50	500	12,5	28	33	10	0,255
563450	MBJ 70-300-6	290	3,4	70	300	6,5	28	33	10	0,21
563460	MBJ 70-300-10	290	3,4	70	300	10,5	28	33	10	0,21
563420	MBJ 70-300-12	290	3,4	70	300	12,5	28	33	10	0,21
563470	MBJ 70-300-16	290	3,4	70	300	16,5	28	33	10	0,2
563480	MBJ 70-300-22	290	2,8	70	300	22,5	40	45	10	0,2
563490	MBJ 70-500-10	290	3,4	70	500	10,5	28	33	10	0,34
563500	MBJ 100-250-16	349	4	100	250	16,5	50	55	10	0,254
563510	MBJ 100-250-30	349	4	100	250	30,5	50	55	10	0,254
563520	MBJ 100-500-16	349	4	100	500	16,5	50	55	10	0,508
563530	MBJ 100-500-30	349	4	100	500	30,5	50	55	10	0,508

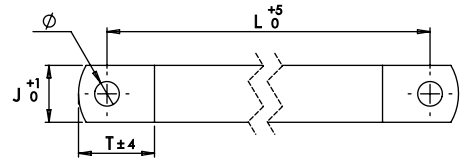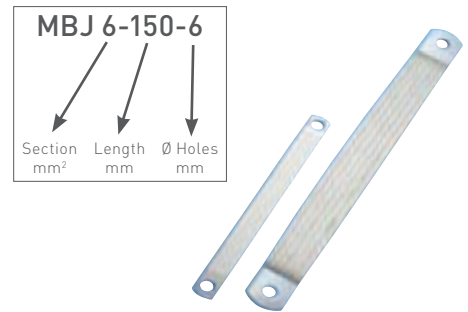


TECHNICAL DATA

- Recommended by EMC/EMI directives
- Flat tinned copper braids
- Electrolytic copper Cu-ETP according to standard EN13602
- Copper purity of minimum 99,9%
- Maximum resistivity of 0,017241 mm²/m at 20°C
- Standard wire diameter; 0,15 mm
- Bends very close to the contact area
- Working temperature up to 105°C


CERTIFICATION & APPROVALS

- UL Listed (UL467) except BJ
- EAC certificate
- RoHS 2002/95/EC Compliant
- IEC 60439-1 & 61439-1

Comparison of tensile strength

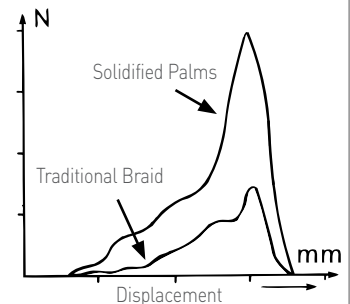

Nominal clamping force




EARTH/GROUND STAINLESS STEEL BRAIDS (CPI & CPIW)



READY-TO-USE STAINLESS STEEL BRAIDS FOR MULTIPLE APPLICATIONS


ERIFLEX develops and manufactures a range of earth/ground stainless steel braids. These high-quality 316L stainless steel braids can be installed in extremely corrosive environments, like offshore applications or coastal applications. The CPI braid is ideal for applications using stainless steel pipe or tanks, like the food and beverage industry, building industry, transportation, oil and chemical industry.

ERIFLEX offers 316L stainless steel, one of the highest resistant stainless steel options on the market. ERIFLEX has mastered the process of manufacturing stainless steel for braiding, crimping, cutting or punching and offers a full range of ready-to-use stainless steel braids.

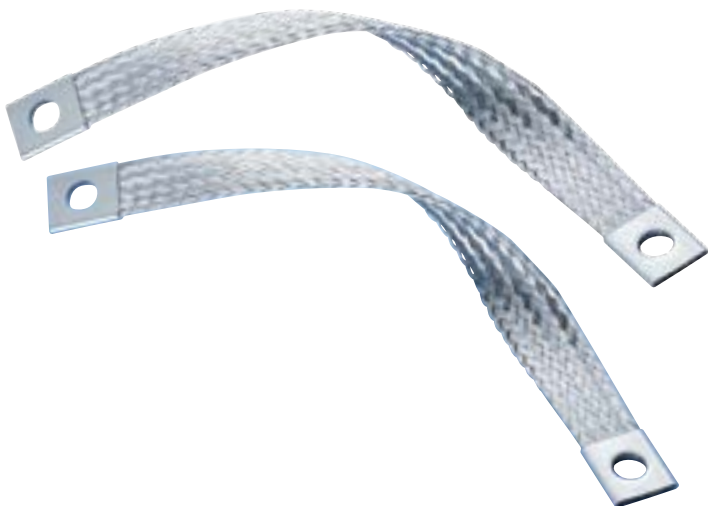


FEATURES

- 316L stainless steel braid ready to use
- Full application range: 16 to 70 mm² section with 150 to 1100 mm length
- High-quality 316L stainless steel: superior abrasion, corrosion, chemical, and UV resistance for outdoor applications
- Good resistance to vibration and fatigue
- Time savings: quick and easy to install. Ready to use. No additional cutting, stripping, crimping and punching needed. Less labor time for installation
- Material savings: No additional lugs or terminals needed
- Durable in outdoor, salt and corrosive environments
- Non-magnetic material
- Long maintenance cycle
- Superior abrasion, corrosion, chemical and UV resistance make it ideal for outdoor applications
- Great for expansion joints where constant movement requires a flexible and indestructible covering
- Won't rust or discolor, so the appearance will never fade or change
- No additional cutting, stripping, or crimping needed
- More flexible connection
- Pre-punched: ready to use
- Quick and easy to install
- Excellent electrical contact
- Strong resistance to vibration and fatigue
- Recommended by the EMC directives
- Reduced maintenance

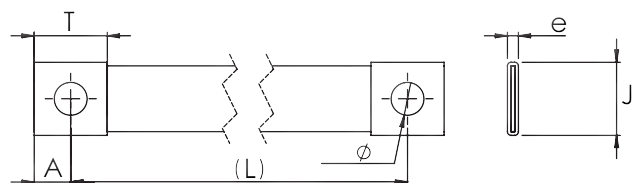

EARTH/GROUND STAINLESS STEEL BRAIDS CPI TECHNICAL CHARACTERISTICS

WHERE STAINLESS BRAIDS CAN BE USED:

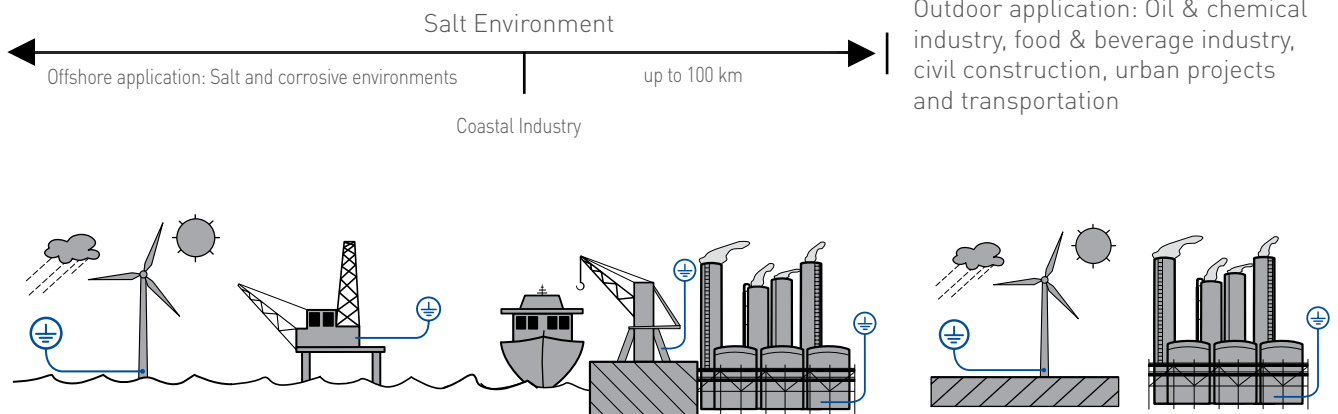

TECHNICAL DATA

- Excellent electrical contact
- Good tensile strength
- Working temperature up to 105°C

BRAID

- 316L Stainless steel
- Wire diameter: 0,25 mm for maximum flexibility
- Strong resistance to vibration

CERTIFICATIONS & APPROVALS

- UL Listed UL467 - grounding and bonding equipment for US and Canada
- RoHS Compliant
- IEC 60439-1 & 61439-1
- ABS American Bureau of Shipping Certificate No. 13-HS1018106-1-PDA-DUP

Part Number	Description	Section mm ²	L mm	Ø mm	J mm	A mm	T mm	e mm		 Kg
554277	CPI 16-150-8	16	150	8,5	17,5	10	20	3	10	0,031
554278	CPI 16-200-8	16	200	8,5	17,5	10	20	3	10	0,037
554279	CPI 16-250-8	16	250	8,5	17,5	10	20	3	10	0,043
554280	CPI 16-300-8	16	300	8,5	17,5	10	20	3	10	0,050
554282	CPI 16-400-8	16	400	8,5	17,5	10	20	3	10	0,062
554286	CPI 16-600-8	16	600	8,5	17,5	10	20	3	10	0,087
554299	CPI 25-150-10	25	150	10,5	26,5	15	30	3,5	10	0,058
554300	CPI 25-200-10	25	200	10,5	26,5	15	30	3,5	10	0,068
554301	CPI 25-250-10	25	250	10,5	26,5	15	30	3,5	10	0,078
554302	CPI 25-300-10	25	300	10,5	26,5	15	30	3,5	10	0,088
554304	CPI 25-400-10	25	400	10,5	26,5	15	30	3,5	10	0,108
554308	CPI 25-600-10	25	600	10,5	26,5	15	30	3,5	10	0,147
554321	CPI 35-150-12	35	150	13	26,5	15	30	4	10	0,071
554322	CPI 35-200-12	35	200	13	26,5	15	30	4	10	0,085
554323	CPI 35-250-12	35	250	13	26,5	15	30	4	10	0,099
554324	CPI 35-300-12	35	300	13	26,5	15	30	4	10	0,112
554326	CPI 35-400-12	35	400	13	26,5	15	30	4	10	0,140
554330	CPI 35-600-12	35	600	13	26,5	15	30	4	10	0,195
554343	CPI 50-150-12	50	150	13	30	15	30	5	10	0,111
554344	CPI 50-200-12	50	200	13	30	15	30	5	10	0,130
554345	CPI 50-250-12	50	250	13	30	15	30	5	10	0,150
554346	CPI 50-300-12	50	300	13	30	15	30	5	10	0,170
554348	CPI 50-400-12	50	400	13	30	15	30	5	10	0,209
554352	CPI 50-600-12	50	600	13	30	15	30	5	10	0,288
554365	CPI 70-150-12	70	150	13	30	15	30	5,8	10	0,139
554366	CPI 70-200-12	70	200	13	30	15	30	5,8	10	0,167
554367	CPI 70-250-12	70	250	13	30	15	30	5,8	10	0,194
554368	CPI 70-300-12	70	300	13	30	15	30	5,8	10	0,222
554370	CPI 70-400-12	70	400	13	30	15	30	5,8	10	0,277
554374	CPI 70-600-12	70	600	13	30	15	30	5,8	10	0,388
554378	CPI 70-800-12	70	800	13	30	15	30	5,8	10	0,498
554384	CPI 70-1100-12	70	1100	13	30	15	30	5,8	10	0,664

CPIW GROUNDING AND BONDING BRAID, STAINLESS STEEL FOR LARGE BOLTS



High-quality CPIW stainless steel grounding and bonding braids can be installed in corrosive environments like offshore applications or coastal applications. The full range of CPIW braids are ideal for applications using stainless steel pipe or tanks, like the food and beverage industry, building industry, transportation or oil and chemical industry.


ERIFLEX offers 316L stainless steel braids, one of the highest resistant stainless steel options on the market. Our proprietary manufacturing process has been optimized to provide the best braiding, welding and connection palm.

FEATURES

- Superior abrasion, corrosion, chemical and UV resistance make CPIW braids ideal for outdoor applications
- Covering from M20 (3/4"-10) up to M42 (1 1/2"-6) bolt fixation point
- Great for expansion joints where constant movement requires a flexible and durable solution
- Ready to use out of the box, eliminates the need for cutting, stripping, crimping and punching
- Quick and easy to install
- Resistant to vibration and fatigue, reducing maintenance
- Will not rust or discolor, so the appearance will never fade or change
- Excellent electrical contact
- No additional lugs or terminals needed
- Non-magnetic material
- Recommended by the EMC/EMI directives
- Performs to the class C5 (very high) category as per ISO 12944-2
- EAC compliant
- RoHS compliant

CPIW GROUNDING AND BONDING BRAID SPECIFICATIONS

- Material: Stainless Steel 316L [EN 1.4404]
- Certification details: UL 467
- Complies with: IEC 60439-1; IEC 61439-1

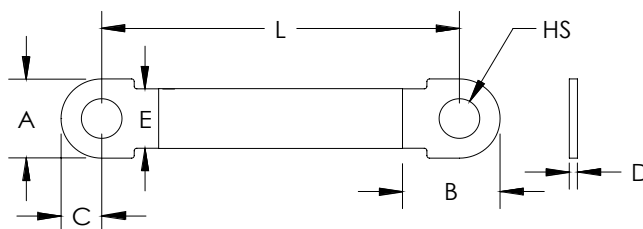

CPIW GROUNDING AND BONDING BRAID, TECHNICAL CHARACTERISTICS



Part No.	Article No.	Cross Section (mm ²)	L (mm)	HS (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Unit Weight (kg)	Minimum Order Quantity
CPIW50-200-20B	554386B	50	200	21	42	51	21	3	30	0.128	50
CPIW50-200-24B	554401B	50	200	25	52	62	26	3	30	0.154	50
CPIW50-250-20B	554398B	50	250	21	42	51	21	3	30	0.148	50
CPIW50-250-24B	554403B	50	250	25	52	62	26	3	30	0.176	50
CPIW50-250-27B	554405B	50	250	28	58	69	29	3	30	0.195	50
CPIW50-250-30B	554407B	50	250	31	62	74	31	3	30	0.207	50
CPIW50-300-20B	554427B	50	300	21	42	51	21	3	30	0.200	50
CPIW50-300-24B	554428B	50	300	25	52	62	26	3	30	0.210	50
CPIW50-300-27B	554429B	50	300	28	58	69	29	3	30	0.220	50
CPIW50-300-30B	554409B	50	300	31	62	74	31	3	30	0.229	50
CPIW50-300-33B	554412B	50	300	34	68	78	34	3	30	0.246	50
CPIW50-300-39B	554416B	50	300	40	78	89	39	3	30	0.284	50
CPIW50-300-42B	554421B	50	300	43	82	94	41	3	30	0.301	50
CPIW50-400-33B	554414B	50	400	34	68	78	34	3	30	0.288	50
CPIW50-400-39B	554418B	50	400	40	78	89	39	3	30	0.327	50
CPIW50-400-42B	554423B	50	400	43	82	94	41	3	30	0.344	50
CPIW70-200-20B	554397B	70	200	21	42	51	21	3	30	0.149	50
CPIW70-200-24B	554402B	70	200	25	52	62	26	3	30	0.175	50
CPIW70-250-20B	554399B	70	250	21	42	51	21	3	30	0.178	50
CPIW70-250-24B	554404B	70	250	25	52	62	26	3	30	0.203	50
CPIW70-250-27B	554406B	70	250	28	58	69	29	3	30	0.221	50
CPIW70-250-30B	554408B	70	250	31	62	74	31	3	30	0.233	50
CPIW70-300-30B	554411B	70	300	31	62	74	31	3	30	0.262	50
CPIW70-300-33B	554413B	70	300	34	68	78	34	3	30	0.278	50
CPIW70-300-39B	554417B	70	300	40	78	89	39	3	30	0.315	50
CPIW70-300-42B	554422B	70	300	43	82	94	41	3	30	0.331	50
CPIW70-400-20B	554388B	70	400	21	42	51	21	3	30	0.264	50
CPIW70-400-33B	554415B	70	400	34	68	78	34	3	30	0.336	50
CPIW70-400-39B	554419B	70	400	40	78	89	39	3	30	0.373	50
CPIW70-400-42B	554424B	70	400	43	82	94	41	3	30	0.389	50

POWER SHUNT (PBC)




- High flexibility
- Reduce vibrations
- Ideal for transformer-busduct link
- Intensity: Up to 4600 A



PBC BRAIDED POWER SHUNTS




- Undrilled palms to customer's specific designs, fitted by power press
- Extra-flexible power connections (expansion rings, bus-bar...)
- Tinned electrolytic copper strand $\varnothing$ 0,15 mm
- When used in parallel, the 2 shunts must be spaced with a minimum distance equal to the thickness of the shunt to allow air cooling

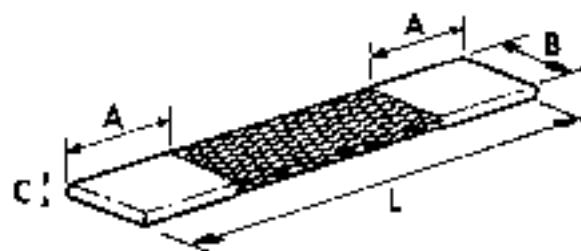

Part No.	Description	Section mm ²	Intensity (ΔT 30K)		Intensity (ΔT 50K)		A mm	B mm	C mm	L mm		Kg
564000	PBC 100 x 250	100	349	600	462	795	35	40	7,0	250	2	0,38
564050	PBC 100 x 500	100	349	600	462	795	35	40	7,0	500	2	0,63
564010	PBC 120 x 250	120	385	670	511	877	35	40	7,5	250	2	0,42
564100	PBC 150 x 250	150	440	757	583	1003	55	50	8,0	250	2	0,63
564150	PBC 150 x 500	150	440	757	583	1003	55	50	8,0	500	2	0,90
564200	PBC 200 x 250	200	550	946	729	1253	55	50	9,0	250	2	0,76
564250	PBC 200 x 500	200	550	946	729	1253	55	50	9,0	500	2	1,20
564300	PBC 250 x 300	250	651	1120	863	1484	85	50	10,5	300	2	1,03
564400	PBC 300 x 400	300	716	1180	948	1565	85	60	11,0	400	1	1,53
564500	PBC 400 x 400	400	853	1360	1131	1808	85	80	11,0	400	1	2,20
564600	PBC 500 x 400	500	917	1561	1216	1944	105	100	11,0	400	1	2,64
564700	PBC 600 x 450	600	1101	1762	1459	2334	105	100	13,0	450	1	3,40
564800	PBC 800 x 450	800	1376	2202	1823	2917	105	100	14,0	450	1	4,26
564900	PBC 1000 x 450	1000	1651	2642	2188	3500	105	100	16,0	450	1	5,47
564030	PBC 1200 x 500	1200	1982	3170	2626	4208	125	120	17,5	500	1	7,16

PPS

PRESSWELDED POWER SHUNTS



FEATURES

Press welding is welding of laminations to each other through direct current applied to pieces under pressure.

This technique results in:

- The formation of a solid palm with properties of plain bar
- Smaller cross section for same capacity
- Runs cooler than equal section
- Plain copper, thickness of laminations 0,2 mm
- When used in parallel, the 2 shunts must be spaced with a minimum distance equal to the thickness of the shunt

Part No.	Description	Section mm ²	Intensity (ΔT 30K)		Intensity (ΔT 50K)		A mm	B mm	C mm	L mm	H mm		Kg
566000	PPS 40/5/50-180	200	572	984	758	1304	50	40	5	180	45	2	0,390
566020	PPS 40/10/50-220	400	849	1460	1125	1935	50	40	10	220	58	2	0,930
566030	PPS 50/10/80-280	500	1022	1758	1354	2329	80	50	10	280	58	1	1,440
566040	PPS 80/10/100-320	800	1511	2493	2002	3303	100	80	10	320	52	1	2,625
566050	PPS 100/10/100-300	1000	1825	2920	2418	3869	100	100	10	300	54	1	3,065
566060	PPS 100/10/110-360	1000	1825	2920	2418	3869	110	100	10	360	53	1	3,610
566070	PPS 100/15/110-360	1500	2178	3485	2886	4617	110	100	15	360	57	1	5,385

CUSTOM SOLUTIONS

ERIFLEX can provide made-to-order, custom configurations to your drawing specifications.

ERIFLEX copper braids can be made to custom lengths, widths, thicknesses and hole patterns; with PVC installation; in flat or tubular shapes; using copper wire; in continuous coils; or with soldered studs or crimped lugs. Let ERIFLEX solve your design and production scheduling challenges.



FLAT COPPER & STAINLESS STEEL BRAIDS (FTCB, FRCB, FSSB & FTCBI)



FTCB 15 FLAT TINNED COPPER BRAIDS



- Standard wire diameter: 0,15 mm
- 25 m coils

Part No.	Description	Section mm ²	mm	Number of Wire	Nominal Current A		Kg
557200	FTCB 15-3	3	5x1	168	30	25 m	0,03
557210	FTCB 15-5	5	8x1	288	45	25 m	0,05
557220	FTCB 15-8	8	8x1,5	456	65	25 m	0,08
557230	FTCB 15-10	10	10x1,5	576	75	25 m	0,10
557240	FTCB 15-16	16	15x1,5	896	120	25 m	0,16
557250	FTCB 15-20	20	20x1,5	1120	140	25 m	0,20
557260	FTCB 15-25	25	23x1,5	1404	150	25 m	0,25
557270	FTCB 15-30	30	23x2,0	1692	180	25 m	0,30
557280	FTCB 15-35	35	23x2,5	1980	200	25 m	0,35
557290	FTCB 15-40	40	25x2,5	2272	220	25 m	0,40
557300	FTCB 15-50	50	28x3	2848	250	25 m	0,50
557310	FTCB 15-60	60	30x3	3392	280	25 m	0,60
557320	FTCB 15-70	70	30x3,5	3968	290	25 m	0,70
557330	FTCB 15-75	75	30x4	4256	300	25 m	0,75
557350	FTCB 15-100	100	40x4	5664	360	25 m	1,00

FRCB 15 FLAT PLAIN COPPER BRAIDS

- Standard wire diameter: 0,15 mm
- 25 m coils

Part No.	Description	Section mm ²	mm	Number of Wire	Nominal Current A		Kg
557000	FRCB 15-3	3	5x1	168	30	25 m	0,03
557010	FRCB 15-5	5	8x1	288	45	25 m	0,05
557020	FRCB 15-8	8	8x1,5	456	65	25 m	0,08
557030	FRCB 15-10	10	10x1,5	576	75	25 m	0,10
557040	FRCB 15-16	16	15x1,5	896	120	25 m	0,16
557050	FRCB 15-20	20	20x1,5	1120	140	25 m	0,20
557060	FRCB 15-25	25	23x1,5	1404	150	25 m	0,25
557070	FRCB 15-30	30	23x2,0	1692	180	25 m	0,30
557080	FRCB 15-35	35	23x2,5	1980	200	25 m	0,35
557090	FRCB 15-40	40	25x2,5	2272	220	25 m	0,40
557100	FRCB 15-50	50	28x3	2848	250	25 m	0,50
557120	FRCB 15-70	70	30x3,5	3968	290	25 m	0,70
557130	FRCB 15-75	75	30x4	4256	300	25 m	0,75
557150	FRCB 15-100	100	40x4	5664	360	25 m	1,00



FTCBI INSULATED FLAT TINNED COPPER BRAIDS

- Insulation in clear PVC, thickness 1 mm, self-extinguishing UL 94 V0
- Standard wire diameter: 0,15 mm
- 25 m coils
- Insulation voltage: 450 V
- Working temperature: up to 70°C

Part No.	Description	Section mm ²	mm	Number of Wire	Nominal Current A		Kg
510300	FTCBI 16	16	17x3,5	896	120	25 m	0,18
510310	FTCBI 25	25	25x3,5	1404	150	25 m	0,29
510340	FTCBI 50	50	30x5	2848	250	25 m	0,60
Standard wire diameter 0,15 mm - Extra long reels							
503600	FTCBI 15-16	16	17x3,5	896	120	100 m	0,18
503610	FTCBI 15-25	25	25x3,5	1404	150	100 m	0,29

FTCB 20 FLAT TINNED COPPER BRAIDS



- Standard wire diameter: 0,20 mm
- Extra long reels

Part No.	Description	Section mm ²	mm	Number of Wire	Nominal Current A		Kg
503510	FTCB 20-5	5	8x1	168	45	500 m	0,05
503520	FTCB 20-10	10	10x1,5	312	75	150 m	0,10
503530	FTCB 20-16	16	15x2	512	120	150 m	0,16
503540	FTCB 20-25	25	25x1,5	792	150	100 m	0,25

FSSB 25 STAINLESS STEEL FLAT BRAIDS



- Standard wire diameter: 0,25 mm
- Stainless steel 316L

Part No.	Description	Section mm ²	mm		Kg
557160	FSSB 25-16 ²	16	15x1,5	25 m	0,14
557170	FSSB 25-25 ²	25	23x1,5	25 m	0,22
557390	FSSB 25-50 ²	50	30x3	25 m	0,44

ROUND & TUBULAR COPPER BRAIDS (RTCB, RRCT, TTCE)

- A large range of braids
- Bare or insulated

- Tubulars for shielding
- Stainless steel for corrosive environment



RTCB / RTCB HL
TINNED COPPER ROUND BRAIDS



Part No.	Description	Section mm ²	External dia in mm	Number of Wire	Nominal Current A		Kg
557600	RTCB 15-6	6	4	352	45	25 m	0,06
557610	RTCB 15-8	8	4,5	464	65	25 m	0,08
557620	RTCB 15-10	10	5	560	75	25 m	0,10
557630	RTCB 15-16	16	6	900	120	25 m	0,16
557640	RTCB 15-25	25	8	1416	150	25 m	0,25
557650	RTCB 15-30	30	9	1680	180	25 m	0,30
557660	RTCB 15-50	50	11	2820	250	25 m	0,50
557670	RTCB 15-75	75	13,5	4236	300	25 m	0,75
557680	RTCB 15-100	100	17	5652	360	25 m	1,00
Standard wire diameter 0,15 mm - Extra long reels							
503700	RTCB 15-10/HL	10	5	560	75	100 m	0,100
503710	RTCB 15-16/HL	16	6	900	120	100 m	0,160
503720	RTCB 15-25/HL	25	7,5	1416	150	100 m	0,250



RRCB
PLAIN COPPER ROUND BRAIDS

- Standard wire diameter: 0,15 mm
- 25 m coils

Part No.	Description	Section mm ²	External dia in mm	Number of Wire	Nominal Current A		Kg
557400	RRCB 15-6	6	4	352	45	25 m	0,06
557410	RRCB 15-8	8	4,5	464	65	25 m	0,08
557420	RRCB 15-10	10	5	560	75	25 m	0,10
557430	RRCB 15-16	16	6	900	120	25 m	0,16
557440	RRCB 15-25	25	8	1416	150	25 m	0,25
557450	RRCB 15-30	30	9	1680	180	25 m	0,30
557460	RRCB 15-50	50	11	2820	250	25 m	0,50
557470	RRCB 15-75	75	14	4236	300	25 m	0,75
557480	RRCB 15-100	100	18	5652	360	25 m	1,00



TTCE
TINNED COPPER TUBULAR BRAIDS

- For screening connecting cables between equipment used in an electromagnetically disturbed environment.
- Supplied with draw wire

Part No.	Description	Section mm ²	Diameter (mm)				Number of Wire	Ø wires mm	Nominal Current A		Kg
			Int.	Covering %	Exp.	Covering %					
510100	TTCE 3	1,7	3	100%	6	90%	96	0,15	13	50 m	0,020
510110	TTCE 5	2,5	5	99%	10	92%	144	0,15	19	50 m	0,026
510120	TTCE 8	4,45	8	99%	16	95%	252	0,15	37	50 m	0,050
510130	TTCE 10	5,7	10	100%	20	92%	320	0,15	43	50 m	0,054
510140	TTCE 15	12	15	100%	30	94%	334	0,20	90	50 m	0,120
510150	TTCE 20	20,4	20	99%	40	87%	288	0,30	122	50 m	0,190
510160	TTCE 25	27,1	25	99%	50	92%	384	0,30	163	25 m	0,270
510170	TTCE 30	33,9	30	100%	60	90%	480	0,30	185	25 m	0,320
510180	TTCE 35	40,7	35	100%	70	94%	576	0,30	244	25 m	0,380
Extra long reels											
504690	TTCE 8/HL	6,8	8	-	16	-	216	0,20	37	200 m	0,050

The primary use of tubular braid is to provide sensitive cables with an EMC/EMI screen to shield them against electromagnetic, electrostatic and radio frequency interference. Optimum screening performance is obtained using copper wire braid that can also be used for earth continuity purposes.

ROUND COPPER BRAIDS (RRCBI & RTCBI)



RRCBI INSULATED PLAIN COPPER ROUND BRAIDS

- Insulation in clear PVC, thickness 1 mm, self-extinguishing UL 94 - VO
- Standard wire diameter: 0,15 mm
- Insulation voltage: 450 V
- Working temperature: up to 70°C

Part No.	Description	Section mm ²	External dia in mm	Number of Wire	Nominal Current A		 Kg
510500	RRCBI 15-10	10	7	560	75	25 m	0,10
510510	RRCBI 15-16	16	8	900	120	25 m	0,16

ON REQUEST SPECIAL MANUFACTURING:

- Tubular braids up to 60 mm diameter maximum
- Flat or round copper braids up to 400 mm² maximum
- Insulation 105° C

RTCBI / RTCBI HL INSULATED ROUND TINNED COPPER BRAIDS

- Insulation in clear PVC, thickness 1 mm, self-extinguishing UL 94 - VO
- Standard wire diameter: 0,15 mm
- 25 m coils
- Insulation voltage: 450 V
- Working temperature: up to 70°C

Part No.	Description	Section mm ²	mm	Number of Wire	Nominal Current A		 Kg
503400	RTCBI 15-10	10	7	560	75	25 m	0,12
503410	RTCBI 15-16	16	8	900	120	25 m	0,18
503420	RTCBI 15-25	25	9,5	1416	150	25 m	0,25
503430	RTCBI 15-30	30	10	1680	180	25 m	0,35
503440	RTCBI 15-50	50	12,5	2820	250	25 m	0,58
Standard wire diameter 0,15 mm - Extra long reels							
503800	RTCBI 15-10HL	10	7	560	75	100 m	0,12
503810	RTCBI 15-16HL	16	8	900	120	100 m	0,18



MAKE YOUR OWN BRAIDED CONNECTIONS



BD CRIMP AND DRILL TOOL

- This tool has been developed by ERIFLEX specifically for crimping and drilling of braid terminals. Guide and specially adapted drill bit included.

Part No.	Description	For Flat	Ø Drill Bit	Bolt		 Kg
558610	BD 16	FTCB or FRCB 15-16	6,5	M6	1	0,653
558640	BD 16-8,5	FTCB or FRCB 15-16	8,5	M8	1	0,653
558620	BD 25	FTCB or FRCB 15-25	11	M10	1	0,678
558630	BD 50	FTCB or FRCB 15-50	12,5	M126	1	0,712


HCT 3-4 CRIMPING TOOL FOR HYDRAULIC WORK CENTER

- This package allows to crimp lugs PB16, PB25 and PB50 on braids with the hydraulic ERIFLEX Puncher.

Part No.	Description		 Kg
545980	HCT 3-4	1	1,850

PB LUGS FOR FLAT BRAIDS (FTCB OR FRCB)

- In tinned annealed copper




Part No.	Description	For Flat	A	B	e		 Kg
557180	PB 16	FTCB or FRCB 15-16	16	15	1	100	0,004
557190	PB 25	FTCB or FRCB 15-25	22	25	1	100	0,010
557380	PB 50	FTCB or FRCB 15-50	30	30	1	100	0,017

ABOUT ELECTROMAGNETIC COMPATIBILITY...

In an environment where electromagnetic disturbances are more and more numerous, the ElectroMagnetic Compatibility (EMC) is increasingly important in the design and building of electrical panels.

In order to avoid stray currents, it is necessary that all the metallic framework, inside the panel or outside, is at the same electrical potential. Thus, it is essential to link all these metal parts with connections presenting a low impedance at High Frequency (H.F.).

Connections with cables are not efficient. Only short and flat conductors are. Their H.F. impedances are 10 times lower than the wire impedances.

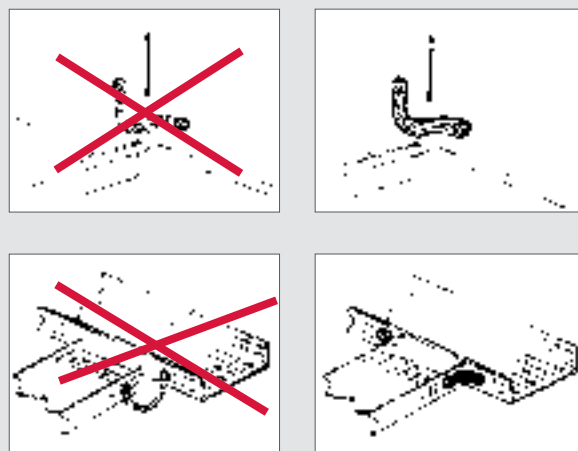

MADE TO ORDER SOLUTIONS (MTO)


ERIFLEX FLEXIBAR CUSTOM SOLUTIONS (MADE TO ORDER)

ERIFLEX can provide preformed ERIFLEX FLEXIBAR configurations to your drawing specifications. ERIFLEX FLEXIBAR can be cut, punched, twisted or bent to address your most challenging panelboard designs and production scheduling requirements. Give ERIFLEX your low voltage connection challenges!



BRAIDED CONDUCTORS CUSTOM SOLUTIONS (MADE TO ORDER)

ERIFLEX brand of copper braids can be made to custom lengths, widths, thicknesses and hole patterns; with PVC insulation; in flat or tubular shapes; using copper or stainless steel wire; in continuous coils; or with soldered studs or crimped lugs. Let ERIFLEX solve your design and production scheduling challenges.

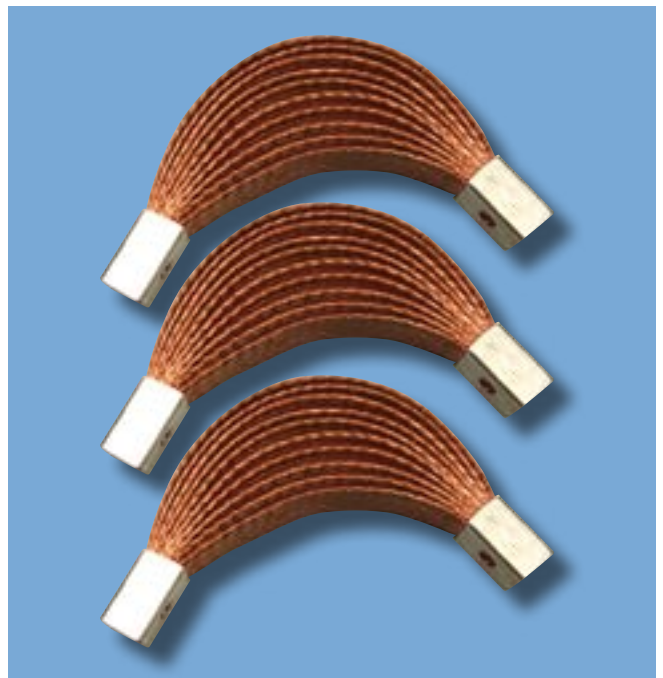

MADE TO ORDER SOLUTIONS

CUSTOM SOLUTIONS (MADE TO ORDER) - CHECK LIST

Summary of the information we need for custom design work. Please photocopy this page and complete it by providing the information you know and sending to your local ERIFLEX customer service representative. (Sections can be left blank)

Electrical Function:

Earthing/grounding conductor.....☐
 Power conductor.....☐
 Nominal current.....A
 Alternating or direct current.....
 Nominal voltage.....V
 Insulation specification (if require).....


Material:

Red/plain copper.....☐
 Tinned copper.....☐
 Stainless steel.....☐
 Aluminum.....☐
 Other.....

Environment:

Ambient temperature.....C°
 Operating temperatureC°
 Conductor maximum temperature.....C°
 Humidity (dry/average/moist).....%HR


EXTREMITY/TERMINAL DIMENSIONS: Indicate your dimensions on the proposed terminal drawing or make a sketch showing your needs.

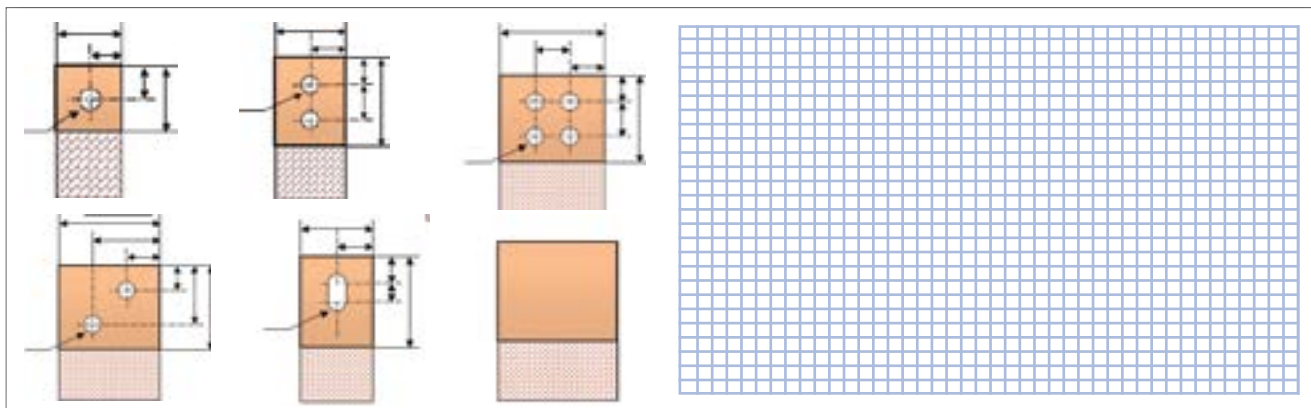

The form contains six terminal drawing templates on the left, showing various cross-sections of conductors with dimensions labeled. To the right of these templates is a large rectangular area filled with a light blue grid, intended for the user to sketch their specific terminal dimensions.

Conductor Dimensions:

Availability: Drawing ☐ Specification ☐ Samples ☐
 Cross Sectionmm²
 Flat or Round Section
 Width of the Conductormm
 Thickness of the Conductormm
 Length of the Conductormm
 Quantity

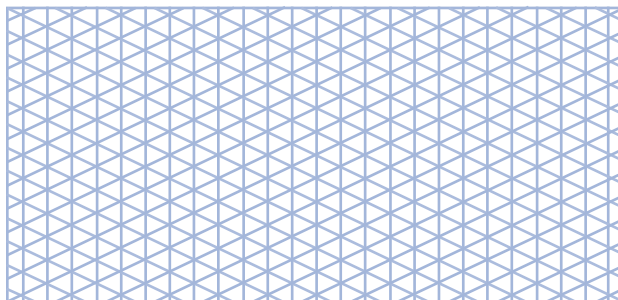

Contact/Requested by:

Company E-mail address
 Contact Name Address (City & Country).....
 Phone Number

CROSS REFERENCE LIST

Part Number	Page	Part Number	Page	Part Number	Page
503400	48	541810	22	552740	17
503410	48	541815	22	552750	17
503420	48	545980	39	552760	17
503430	48	552390	17	552760	19
503440	48	552390	19	552770	17
503500	46	552400	17	552780	17
503510	46	552400	19	552790	17
503520	46	552410	17	552800	17
503530	46	552410	19	552810	17
503540	46	552420	17	552830	17
503600	46	552420	19	552840	17
503610	46	552430	17	552850	17
503620	46	552430	19	552860	17
503700	47	552440	17	552870	17
503710	47	552440	19	552880	19
503720	47	552450	17	552890	17
503730	47	552450	19	552900	17
503800	48	552460	17	552910	17
503810	48	552460	19	552920	17
503820	48	552470	17	552930	17
503830	48	552470	19	552950	17
504690	47	552480	17	552960	17
505501	19	552480	19	552970	17
505502	19	552490	17	552980	17
505503	19	552490	19	552990	17
505506	19	552500	17	553020	24
505507	19	552500	19	553030	24
505508	19	552510	17	553040	24
505514	19	552510	19	553050	24
505515	19	552520	17	553060	24
510100	47	552530	17	553070	24
510110	47	552540	17	553100	24
510120	47	552550	17	553110	24
510130	47	552550	19	553120	24
510140	47	552560	17	553200	24
510150	47	552560	19	553210	24
510160	47	552570	17	553220	24
510170	47	552570	19	553230	24
510180	47	552580	17	553250	24
510300	46	552590	17	553260	24
510310	46	552600	17	553370	23
510320	46	552610	17	553380	23
510340	46	552620	17	553400	25
510500	48	552620	19	553405	25
510510	48	552630	17	553410	25
538650	17	552630	19	553430	25
541060	19	552640	17	553440	25
541090	19	552640	19	553505	25
541100	19	552650	17	553510	25
541110	19	552660	17	553520	25
541150	19	552670	17	553530	25
541160	19	552680	17	553540	25
541170	19	552690	17	553550	23
541230	19	552690	19	553550	37
541240	19	552700	17	553560	23
541774	22	552700	19	553560	37
541775	22	552710	17	553570	23
541776	22	552710	19	553580	23
541800	22	552720	17	553590	23
541805	22	552730	17	554277	41

CROSS REFERENCE LIST

Part Number	Page	Part Number	Page	Part Number	Page
554278	41	556920	38	557680	47
554279	41	556930	39	558240	33
554280	41	556940	39	558241	33
554282	41	556950	39	558242	33
554286	41	556960	39	558243	33
554299	41	556970	39	558244	33
554300	41	556980	39	558249	33
554301	41	557000	46	558250	33
554302	41	557010	46	558255	33
554304	41	557020	46	558256	33
554308	41	557030	46	558260	33
554321	41	557040	46	558261	33
554322	41	557050	46	558262	33
554323	41	557060	46	558263	33
554324	41	557070	46	558264	33
554326	41	557080	46	558270	33
554330	41	557090	46	558271	33
554343	41	557100	46	558272	33
554344	41	557110	46	558273	33
554345	41	557120	46	558274	33
554346	41	557130	46	558276	33
554348	41	557150	46	558280	33
554352	41	557160	46	558281	33
554365	41	557170	46	558282	33
554366	41	557180	49	558283	33
554367	41	557190	49	558284	33
554368	41	557200	46	558285	33
554370	41	557210	46	558290	33
554374	41	557220	46	558291	33
554378	41	557230	46	558292	33
554384	41	557240	46	558293	33
556600	39	557250	46	558294	33
556610	39	557260	46	558295	33
556620	39	557270	46	558310	25
556630	39	557280	46	558340	25
556640	39	557290	46	558370	25
556650	39	557300	46	558410	25
556660	39	557310	46	558440	25
556670	39	557320	46	558460	25
556680	39	557330	46	558480	25
556690	39	557350	46	558490	25
556700	39	557380	49	558500	31
556710	39	557390	46	558501	31
556720	39	557400	47	558502	31
556730	39	557410	47	558503	31
556740	39	557420	47	558504	31
556750	39	557430	47	558505	31
556760	39	557440	47	558506	31
556770	39	557450	47	558507	31
556780	39	557460	47	558508	31
556790	39	557470	47	558509	31
556800	39	557480	47	558510	31
556810	39	557600	47	558511	31
556820	39	557610	47	558512	31
556830	39	557620	47	558513	31
556840	39	557630	47	558514	31
556850	39	557640	47		
556860	39	557650	47		
556900	38	557660	47		
556910	38	557670	47		

CROSS REFERENCE LIST

Part Number	Page	Part Number	Page	Part Number	Page
558515	31	563520	39	566810	21
558516	31	563530	39	568700	25
558517	31	563540	39	568730	25
558518	31	563550	39	505509*	18
558519	31	563560	39	505510*	18
558520	31	564000	44	505516*	18
558521	31	564010	44	505517*	18
558522	31	564030	44	505518*	18
558523	31	564050	44	505519*	18
558524	31	564100	44	505523*	18
558525	31	564150	44	505526*	18
558526	31	564200	44	538650*	18
558527	31	564250	44	541180*	18
558528	31	564300	44	541250*	18
558529	31	564400	44	541260*	18
558530	31	564500	44	541270*	18
558531	31	564600	44	541320*	18
558532	31	564700	44	541380*	18
558533	31	564800	44	552520*	18
558534	31	564900	44	552530*	18
558535	31	564960	44	552540*	18
558536	31	564961	44	552580*	18
558537	31	564962	44	552590*	18
558538	31	564963	44	552600*	18
558539	31	564964	44	552610*	18
558540	31	564965	44	552650*	18
558541	31	564966	44	552660*	18
558542	31	564967	44	552670*	18
558543	31	564968	44	552680*	18
558544	31	564969	44	552720*	18
558545	31	564970	44	552730*	18
558546	31	564971	44	552740*	18
558610	49	564972	44	552750*	18
558620	49	565000	39	552770*	18
558630	49	566000	35	552780*	18
558640	49	566020	45	552790*	18
558880	25	566030	45	552800*	18
561200	25	566040	45	552810*	18
561210	25	566050	45	552830*	18
561220	25	566060	45	552840*	18
563300	39	566070	45	552850*	18
563320	39	566490	21	552860*	18
563340	39	566500	21	552870*	18
563350	39	566510	21	552890*	18
563360	39	566520	21	552900*	18
563370	39	566550	21	552910*	18
563380	39	566560	21	552920*	18
563390	39	566570	21	552930*	18
563400	39	566580	21	552950*	18
563410	39	566590	21	552960*	18
563420	39	566630	21	552970*	18
563430	39	566640	21	552980*	18
563440	39	566650	21	552990*	18
563450	39	566660	21	534000	13
563460	39	566670	21	534001	13
563470	39	566720	21	534002	13
563480	39	566730	21	534003	13
563490	39	566750	21	534004	13
563500	39	566780	21	534005	13
563510	39	566800	21	534006	13

CROSS REFERENCE LIST

Part Number	Page
534007	13
534008	13
534009	13
534010	13
534011	13
534012	13
534013*	13
534014*	13
534015*	13
534016	13
534017	13
534018	13
534019*	13
534020*	13
534021*	13
534022*	13
534023	13
534024	13
534025	13
534026*	13
534027*	13
534028*	13
534029*	13
534030	13
534031	13
534032	13
534033*	13
534034*	13
534035*	13
534036*	13
534037	13
534038*	13
534039*	13
534040*	13
534041*	13
534042*	13
534044*	13
534045*	13
534046*	13
534047*	13
534048*	13
534049*	13
534050*	13
534051*	13
534052*	13
534053*	13
534055*	13
534056*	13
534057*	13
534058*	13
534059*	13
534060*	13

OTHER ERIFLEX LITERATURE



Power, earthing and grounding conductors, busbar supports and copper busbar, insulators and sleeves solutions



ERIFLEX hydraulic and manual tools for ERIFLEX FLEXIBAR flexible busbar and copper busbar manipulation and transformation



Full range of industrial connections and solutions with single and multiple pole distributions blocks, power terminals and power blocks



WARNING:

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at erico.pentair.com and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 2012 - 2017 Pentair.