








Door Stop Kit




1  (1x)	2 1/4-20 NYLOCK  (1x)
3  (1x)	4 1/4-20 x .62  (4x)
5 1/4-20  Torque - 60 LBF-IN (4x)	6  (5x)
7  (1x)	8  (1x)
9  (1x)	


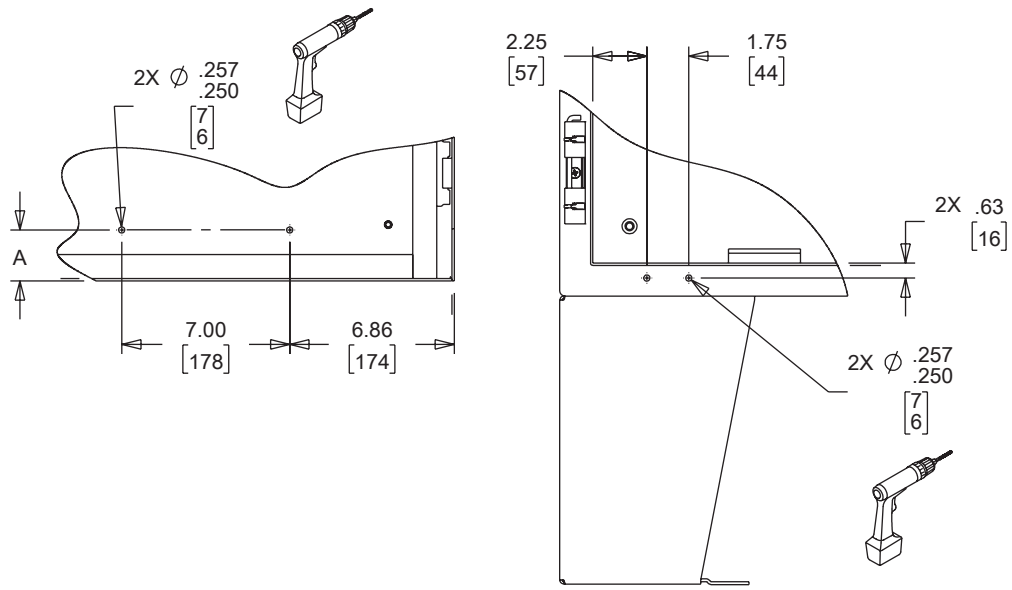


LIFT OFF HINGE

HOLE LOCATION TABLE	
A	BULLETIN
1.88	A4L3, A30S, A21
2.22	A4L, A4SL, A4L3D, A4S3, A12L, A12S, A21S4, A27, A28, A28S4, A30, A30S4, A34,

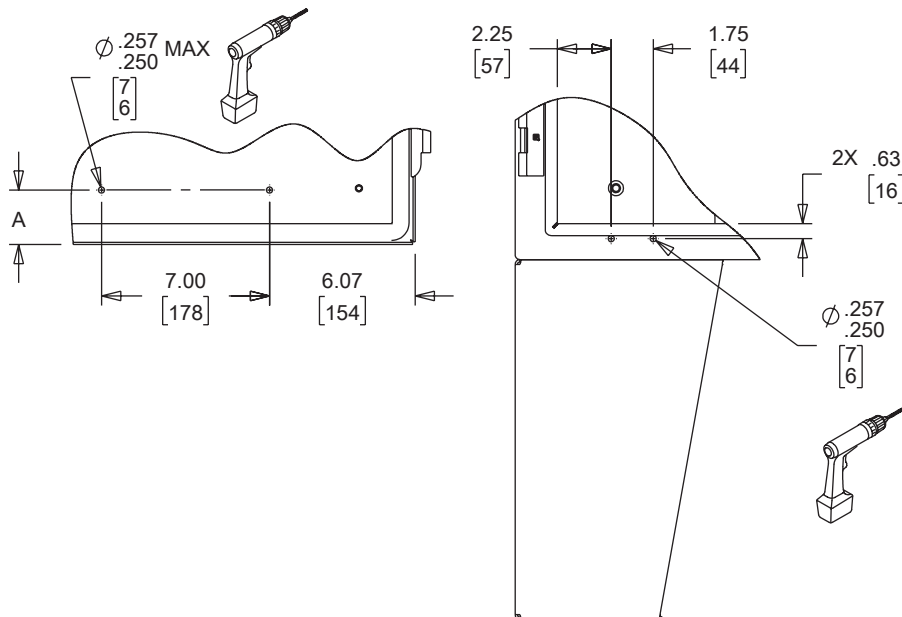

CONTINUOUS HINGE

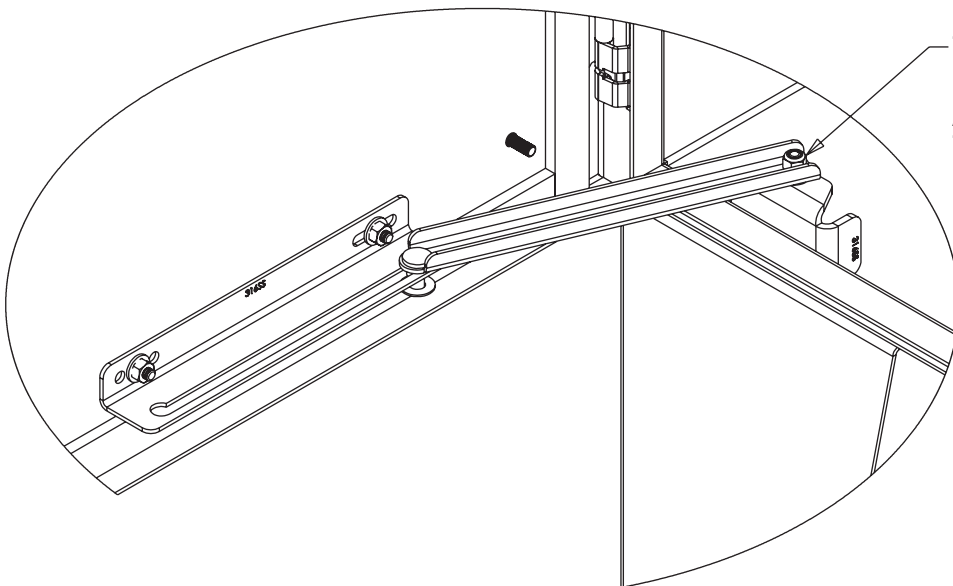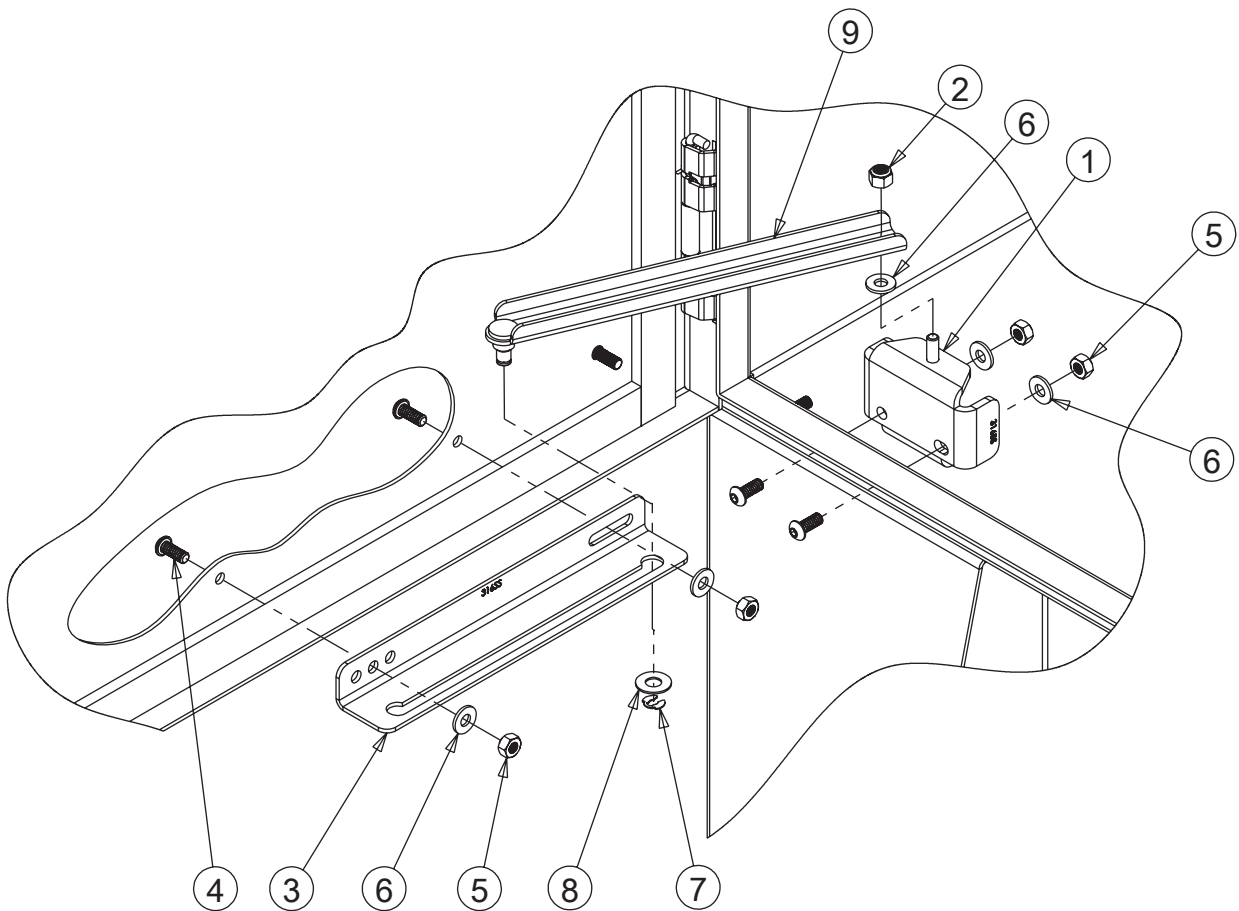

TIGHTEN TO APPROXIMATELY
ONE THREAD EXPOSED;
ARM MUST BE FREE
TO MOVE UP AND DOWN