



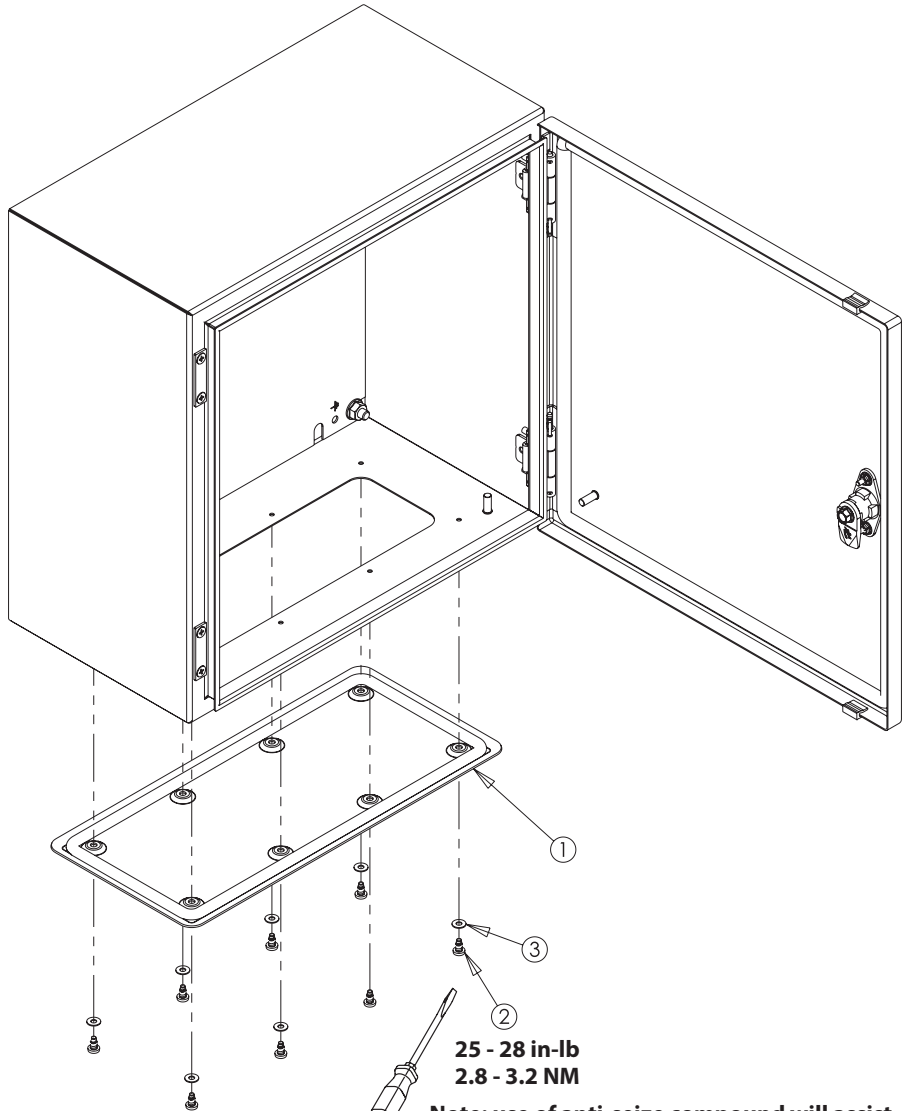

**25 - 28 in-lb
2.8 - 3.2 NM**

Note: use of anti-seize compound will assist installation and help prevent galling.

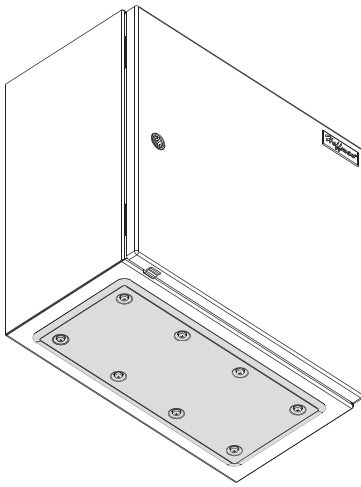