


Features

- For use indoors, outdoors or in harsh environments
- Aluminum Alloy 6063
- Rungs are welded to stringers for strength and continuity
- 9" Rung spacing
- Class 1 Fitting
- Splice plates and hardware included*



Rail Height	Width 1	Width 2	Center	left	right	
4"	9"	6"	LFRC40906	LFRL40906	LFRR40906	
	12"	6"	LFRC41206	LFRL41206	LFRR41206	
		9"	LFRC41209	LFRL41209	LFRR41209	
	18"	6"	LFRC41806	LFRL41806	LFRR41806	
		9"	LFRC41809	LFRL41809	LFRR41809	
		12"	LFRC41812	LFRL41812	LFRR41812	
	24"	6"	LFRC42406	LFRL42406	LFRR42406	
		9"	LFRC42409	LFRL42409	LFRR42409	
		12"	LFRC42412	LFRL42412	LFRR42412	
		18"	LFRC42418	LFRL42418	LFRR42418	
	30"	6"	LFRC43006	LFRL43006	LFRR43006	
		9"	LFRC43009	LFRL43009	LFRR43009	
		12"	LFRC43012	LFRL43012	LFRR43012	
		18"	LFRC43018	LFRL43018	LFRR43018	
	36"	24"	LFRC43024	LFRL43024	LFRR43024	
		6"	LFRC43606	LFRL43606	LFRL43606	
		9"	LFRC43609	LFRL43609	LFRL43609	
		12"	LFRC43612	LFRL43612	LFRL43612	
		18"	LFRC43618	LFRL43618	LFRL43618	
	6"	9"	6"	LFRC60906	LFRL60906	LFRR60906
12"			6"	LFRC61206	LFRL61206	LFRR61206
			9"	LFRC61209	LFRL61209	LFRR61209
18"			6"	LFRC61806	LFRL61806	LFRR61806
			9"	LFRC61809	LFRL61809	LFRR61809
		12"	LFRC61812	LFRL61812	LFRR61812	
24"		6"	LFRC62406	LFRL62406	LFRR62406	
		9"	LFRC62409	LFRL62409	LFRR62409	
		12"	LFRC62412	LFRL62412	LFRR62412	
		18"	LFRC62418	LFRL62418	LFRR62418	
30"		6"	LFRC63006	LFRL63006	LFRR63006	
		9"	LFRC63009	LFRL63009	LFRR63009	
		12"	LFRC63012	LFRL63012	LFRR63012	
		18"	LFRC63018	LFRL63018	LFRR63018	
		24"	LFRC63024	LFRL63024	LFRR63024	
36"		6"	LFRC63606	LFRL63606	LFRL43606	
		9"	LFRC63609	LFRL63609	LFRL43609	
		12"	LFRC63612	LFRL63612	LFRL43612	
		18"	LFRC63618	LFRL63618	LFRL43618	
		24"	LFRC63624	LFRL63624	LFRL43624	
	30"	LFRC63630	LFRL63630	LFRL43630		

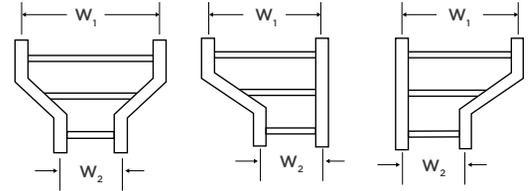

Note: *Included hardware is geomet-plated steel

Dimensions in Inches (mm)