
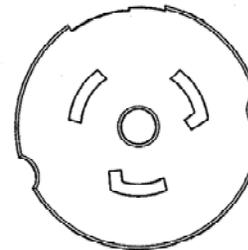
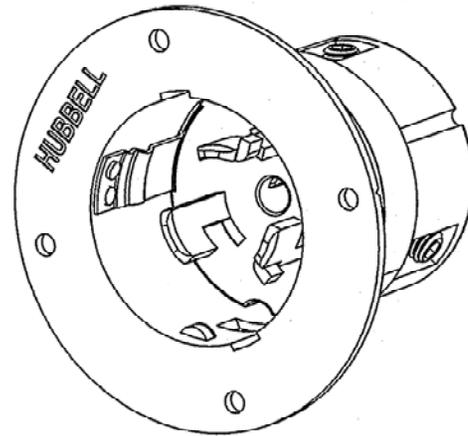
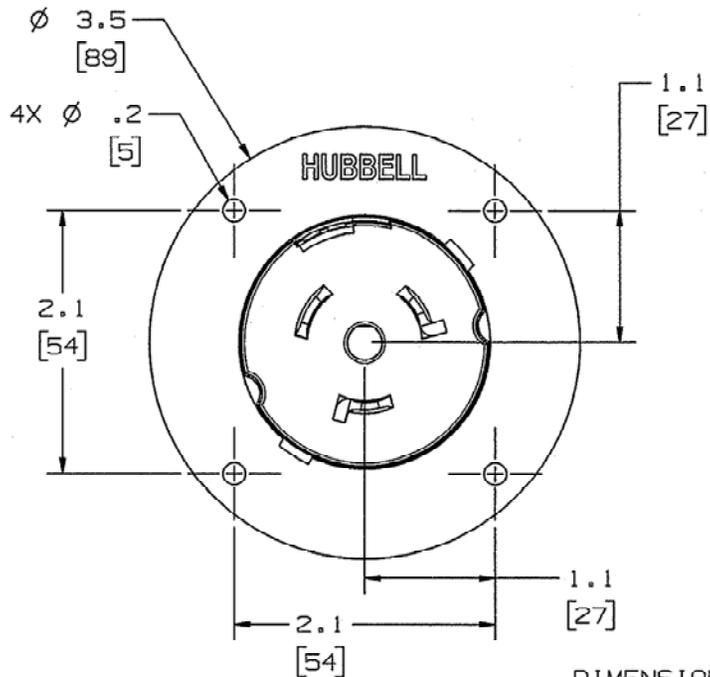


M-10801 | 2

- NOTES: UNLESS OTHERWISE SPECIFIED
1. UL & CSA CERTIFIED.
 2. DIMENSIONS IN INCHES [mm]
 3. RECOMMENDED PANEL CUTOUT
 $\varnothing 2-15/16$ [$\varnothing 75$]
 4. TOLERANCES: $\pm .1$

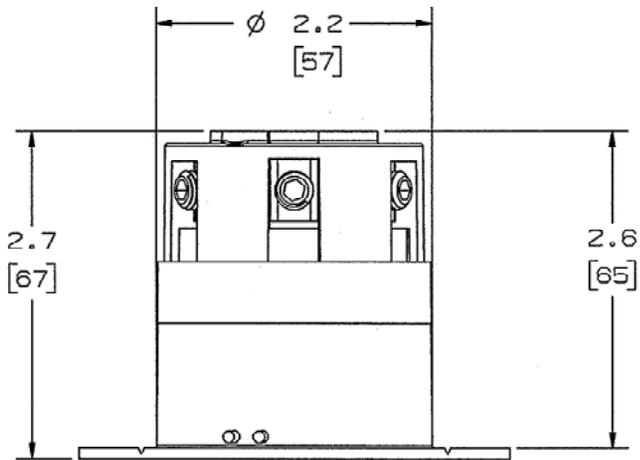

CS8375L

DIMENSIONED

CATALOG NO.	RATING	TERMINAL CAPACITY
CS6375L	50A 125/250V	#10 AWG TO #4 AWG
CS8375L	50A 250V 3 \varnothing	

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
INLET FLANGE	NYLON	
BLADE HOLDER	NYLON	
BLADE COVER	NYLON	
BLADES	BRASS	
ASSY RIVETS, GROUND DIVIDER	COPPER ALLOY	
TERMINALS	ALUMINUM	TIN
TERMINAL SCREWS	STEEL	TIN
ASSY SCREWS	STEEL	ZINC
GROUND CONTACT	BRASS	
GROUND SHUNT	BRASS	

REV	DESCRIPTION	APP	DATE
2	ADDED NOTE 4 & REVISED PARTS LIST PER DCN# 15579	MAM	03/06/09
1	RELEASE PER DCN# 15341		12/18/08

SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
 FLANGED INLET

TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS	1/64	DR. BY PJT	APP. BY MAM
DECIMALS	± .005	TR. BY	SCALE 1:1
ANGLES	± 2'	CHK'D BY TLS	DATE 12/12/08