

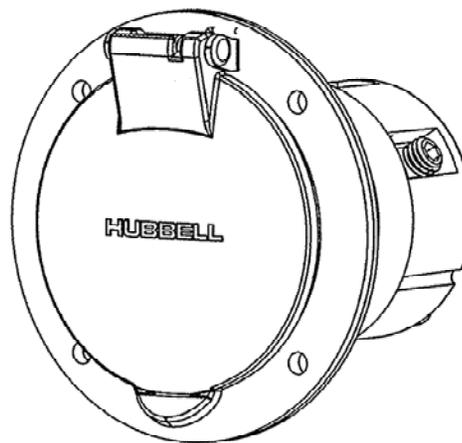
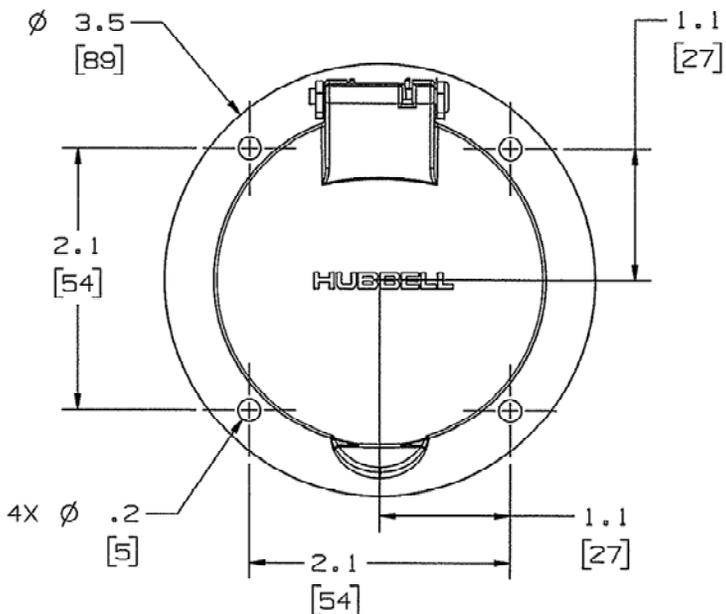



M-10803 2

NOTES: UNLESS OTHERWISE SPECIFIED

1. UL & CSA CERTIFIED.
2. DIMENSIONS IN INCHES [mm]
3. RECOMMENDED PANEL CUTOUT ϕ 2-15/16 [ϕ 75]
4. TOLERANCES: $\pm .1$

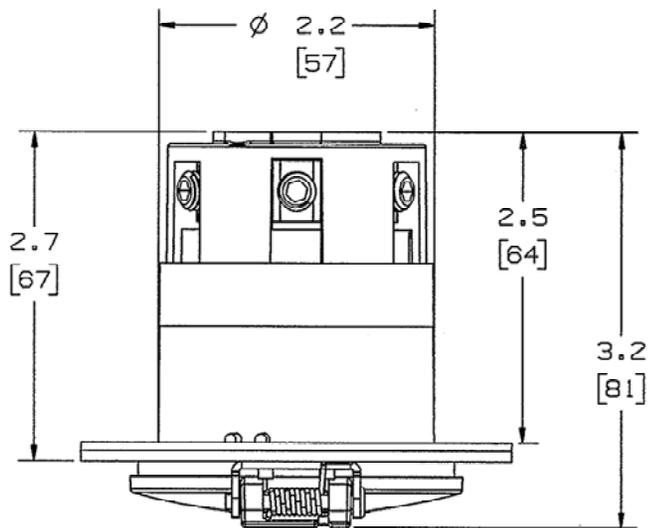

CS6375LC



CS8375LC

CATALOG NO.	RATING	TERMINAL CAPACITY
CS6375LC	50A 125/250V	#10 AWG TO #4 AWG
CS8375LC	50A 250V 3 ϕ	

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
INLET FLANGE	NYLON	
BLADE HOLDER	NYLON	
BLADE COVER	NYLON	
BLADES	BRASS	
ASSY RIVETS, GROUND	COPPER ALLOY	
DIVIDER	POLYCARBONATE	
TERMINALS	ALUMINUM	TIN
TERMINAL SCREWS	STEEL	TIN
ASSY SCREWS	STEEL	ZINC
GROUND CONTACT	BRASS	
GROUND SHUNT	BRASS	
FLIP LID	NYLON	
GASKETS	FOAM	
HINGE	STEEL	ZINC
HINGE PIN	STEEL	ZINC
HINGE SPRING	STAINLESS STEEL	
ASSY RIVETS, HINGE	STEEL	ZINC

2	ADDED NOTE 4 & REVISED PARTS LIST PER DCN# 15579	MAM	03/06/09
1	RELEASE PER DCN# 15341	MAM	12/18/08
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
FLANGED INLET WITH COVER

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS $\pm 1/64$
DECIMALS $\pm .005$
ANGLES $\pm 2'$

WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT
DR. BY PJT APP. BY MAM
TR. BY SCALE 1:1
CHK'D BY TLS DATE 12/12/09

CODE 74545

DIMENSION SHEET FOR CMT. NO.

SEE TABLE

REPAIRABLE NON-REPAIRABLE

B

M-10803

2