



Low Voltage Switches with 0-10V Dimming

Specifications

Base Catalogs: DSM30xx, DSL30xx, DSC010xx, DSM010xx, DSL010xx
 Compatible with Hubbell Wiring Device-Kellems CU300HD, CU300M control units, AAR20P relay packs.
 0-10V Dimming Series compatible with IEC60929 Annex E.2 compliant LED Drivers
 Accepts Hubbell Wiring Device-Kellems NPS26 and NP26 series decorator style wall plates (not included)
 Two-year warranty

Electrical Ratings

100mA @ 30VDC
 0-10V Dimming Series: Current Sinking Capacity: 100mA
 Available in Latching, Momentary, and Combination (DSC010series) of both configurations

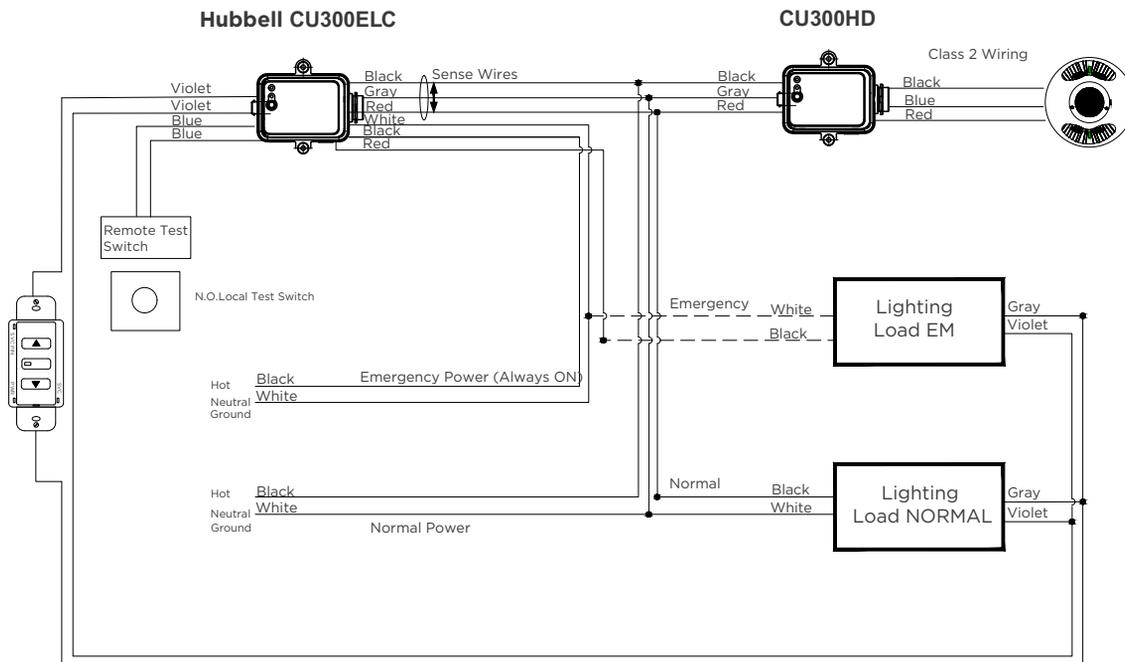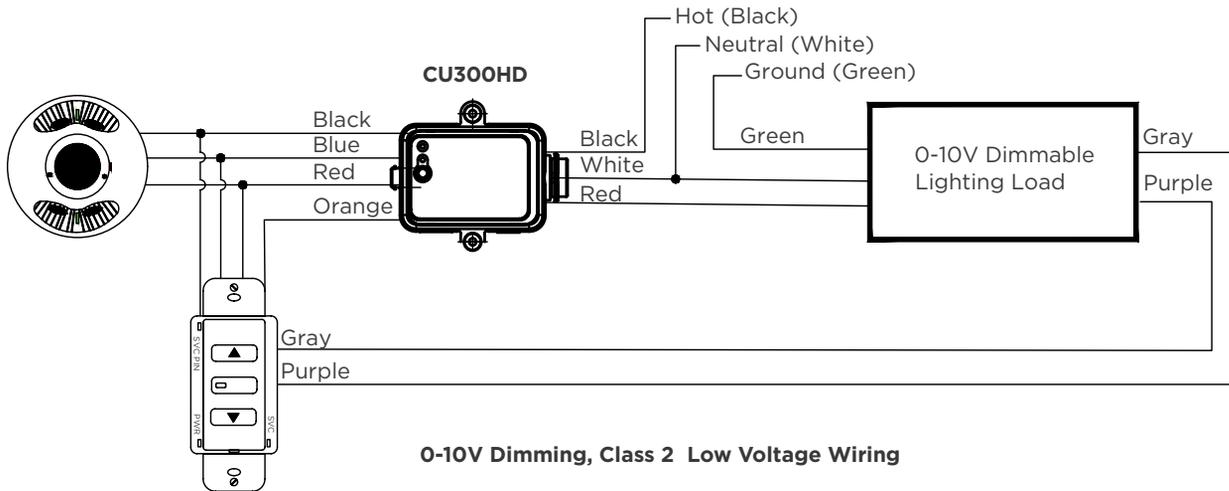

Dimensions in Inches (mm)