
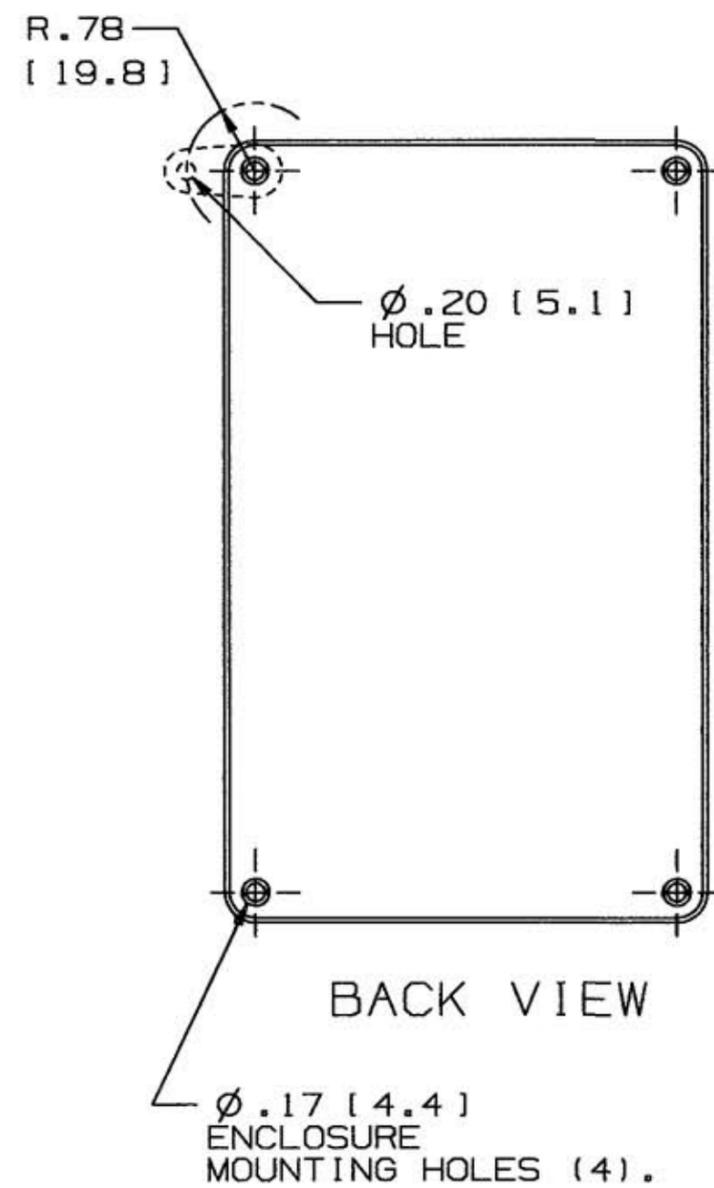
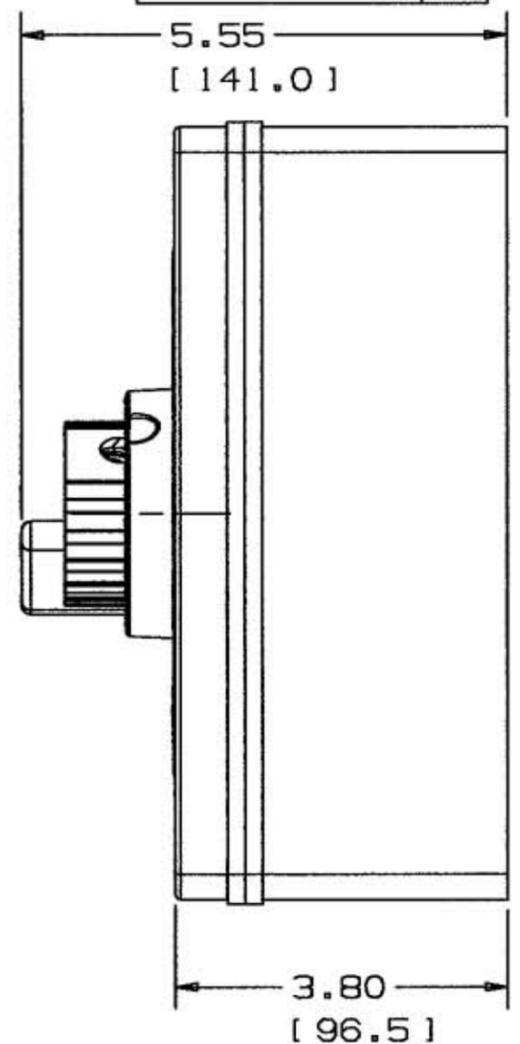


M-9331 1

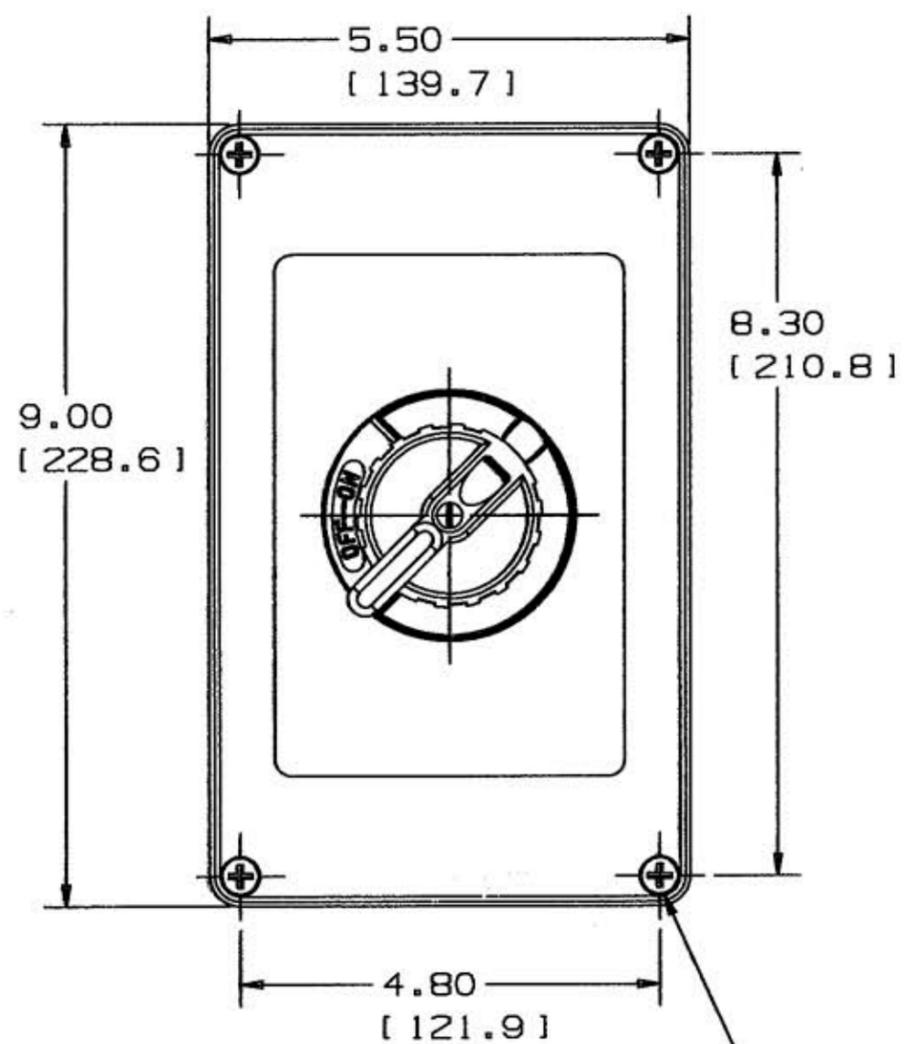

FRONT VIEW

SIDE VIEW


BACK VIEW

COVER MOUNTING HOLES ARE ALSO ENCLOSURE MOUNTING HOLES.

TORQUE 5 TO 15 LB.IN.

OPTIONAL MTG. FEET (4).

DIMENSIONS IN INCHES [MM].

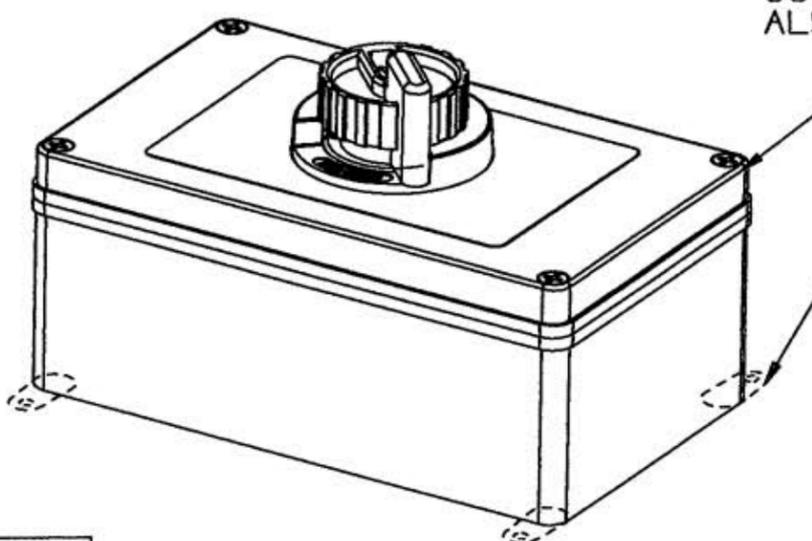

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
ENCLOSURE	THERMOPLASTIC	GRAY
ENCLOSURE HANDLE	THERMOPLASTIC	YELLOW
ENCL. ON-OFF RING	THERMOPLASTIC	RED
SW MTG. BRACKET	STEEL	GALVANIZED
SW BASE & COVER	THERMOSET	BLACK
SW BRIDGE	STEEL	GALVANIZED
SW TERMINALS	COPPER ALLOY	
SW TERMINAL SCREWS	STEEL	ZINC
SW AUX. CONT. PLATE	STEEL	ZINC

SYMBOL	REVISIONS	APP	DATE
1	DCN11626 INITIAL RELEASE	SM	4-14-04

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
60A NEMA 4X ROT SW
HUBBELL CUSTOMER DWG.

TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS	± 1/64	DR. BY	PAC
DECIMALS	± .005	TR. BY	SCALE NONE
ANGLES	± 2°	CHK'D BY	DATE 4-6-04

CATALOG NO.	PHASE	GENERAL RATING	H.P. RATINGS				TERM. MAX. CAP. & WIRE INFO.	INSUL. STRIP IN. [MM]	TERMINAL TORQUE LB.IN. [Nm]
			120V AC	240V AC	480V AC	600V AC			
HBL16X63D	3Ø	60A 600VAC		10	25	30	#6 AWG 60° C MIN.	5/8 [16]	25 [2.8]

DIMENSION SHEET FOR CAT. NO. M-9331 1
 SEE CHART
 REPAIRABLE NON-REPAIRABLE