


**SKU:** AH-11

**UPC:** 0783669004205

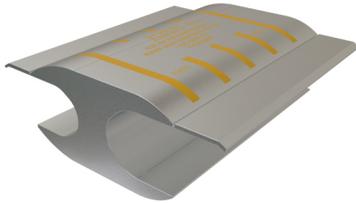

**Features & Benefits:**

**Description:** Aluminum Compression Tap, Main Range 1000-600, Tap Range 600-350, Tin Plated, UL

## Specs

### Additional Class Attributes

Barrel Marking	Ink
Fixing Type	NA
ILSCOs Die Index Number	KR
Replacement Part(s)	NA

### Dimensions

Height (IN)	1.74
Height BX (IN)	3.75
Height (mm)	44.196
Length (IN)	4.625
Length (mm)	117.475
Weight (LB)	1.27976120341566
Weight BX (LB)	7.5399
Width (IN)	4.663
Width BX (IN)	6.5
Width (mm)	118.4402

### Material and Finish

Conductor Material	Aluminum
Connector Finish	Tin
Insulation	NA
Material	Aluminum

### Additional Technical Specifications

Conductor Type	Stranded
----------------	----------

### General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 5
Direct Burial	No
Dual Rated	Yes
NEMA Code	S-588-1
UPC Code	78366900420

### Bolt and Screw Sizes

Mounting Bolt/Stud Size	NA
-------------------------	----

### Testing Standards

CSA File Number	NA
Prop65 Compliance	This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation
UL Control Number	453G
UL / CULUS Specification	UL 486A/B Listed
UL File Number	E158587

### Environment and Temperature

Temperature Rating	90°C
--------------------	------

### Color

Color	Silver
Color Code	Yellow

### Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)	NA
Conductor Range AL Stranded (Primary, run, main, line)	1000 kcmil COMPACT - 600 kcmil
Conductor Range AL Stranded (Secondary, tap, load)	600 kcmil - 350 kcmil
Conductor Range CU Solid (Primary, run, main, line)	NA
Conductor Range CU Solid (Secondary, tap, load)	NA
Conductor Range CU Stranded (Primary, run, main, line)	750 kcmil - 600 kcmil
Conductor Range CU Stranded (Secondary, tap, load)	600 kcmil - 350 kcmil
Conductor Range AL Solid (Primary, run, main, line)	NA

### Voltage

Voltage Rating	35 kV
Voltage Rating with cover	NA