


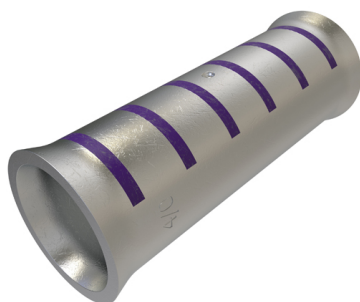

SKU: CCS-4/0

UPC: 0783669032086

Features & Benefits:

Description: Copper Compression Sleeve, Conductor Size 4/0, Flared End, Tin Plated

Specs

Additional Class Attributes

Barrel Marking	Ink
Barrel Type	Standard
Flared End	Yes
ILSCOs Die Index Number	NA
Installing Dies	NA
Sight Window	No
Slotted	No

Dimensions

Height (IN)	0.768
Height BX (IN)	2.25
Height (mm)	19.5072
Inside Diameter (IN)	0.559
Inside Diameter (mm)	14.1986
Length (IN)	2.471
Length (mm)	62.7634
Outside Diameter (IN)	0.768
Outside Diameter (mm)	19.5072
Weight (LB)	0.104475419193585
Weight BX (LB)	2.143
Width (IN)	0.768
Width BX (IN)	5
Width (mm)	19.5072

Material and Finish

Conductor Material	Copper
Connector Finish	Tin
Insulation	NA
Material	Copper

Additional Technical Specifications

Conductor Type	Stranded
----------------	----------

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 10
Direct Burial	No
Dual Rated	No
NEMA Code	S-588-1
UPC Code	78366903208

Bolt and Screw Sizes

Mounting Bolt/Stud Size	NA
-------------------------	----

Testing Standards

CSA File Number	AP-100973-1
Prop65 Compliance	This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation
UL Control Number	8M24
UL / CULUS Specification	UL 486A/B Listed
UL File Number	E158587

Environment and Temperature

Temperature Rating	90°C
--------------------	------

Color

Color	Silver
Color Code	Purple

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)	NA
Conductor Range AL Stranded (Primary, run, main, line)	NA
Conductor Range AL Stranded (Secondary, tap, load)	NA
Conductor Range CU Solid (Primary, run, main, line)	NA
Conductor Range CU Solid (Secondary, tap, load)	NA
Conductor Range CU Stranded (Primary, run, main, line)	4/0 Str
Conductor Range CU Stranded (Secondary, tap, load)	NA
Conductor Range AL Solid (Primary, run, main, line)	NA

Voltage

Voltage Rating	35 kV
----------------	-------