



TYPE CCS

Features

- Manufactured from high strength copper
- Electro-tin plated
- Suitable for use in circuits rated 35KV or less, proper high voltage spacing and insulation techniques must be used
- Color coded
- Sight hole
- Flared end
- Rated to 90° C

Benefits

- Provides maximum conductivity and excellent crimping characteristics
- Provides low contact resistance
- Application versatility
- Provides visual tooling recommendation for IlSCO or standard industry tools
- Allows visual inspection
- Easy wire insertion

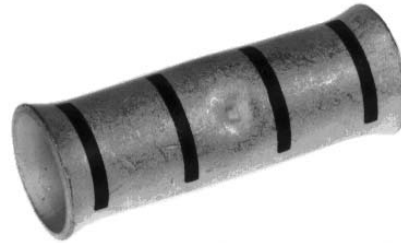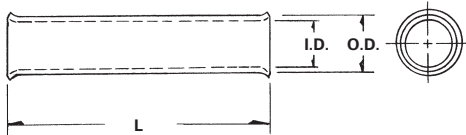

Catalog Number	Wire Size	Die Color Code	L	O.D.	I.D.
CCS-6	6	Blue	1-1/16	5/16	15/64
CCS-4	4	Grey	1-13/64	23/64	9/32
CCS-2	2	Brown	1-23/64	7/16	21/64
CCS-1	1	Green	1-23/64	15/32	23/64
CCS-1/0	1/0	Pink	1-35/64	33/64	13/32
CCS-2/0	2/0	Black	1-51/64	37/64	15/32
CCS-3/0	3/0	Orange	1-29/32	5/8	33/64
CCS-4/0	4/0	Purple	2	11/16	9/16

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
UL File E158587