




VSQ Series 30A 3P 4W Hazardous Interlocked Receptacle

By Killark
Catalog # [VSQ3034](#)

30A 3W4P VSQ Hazardous Interlocked Receptacle

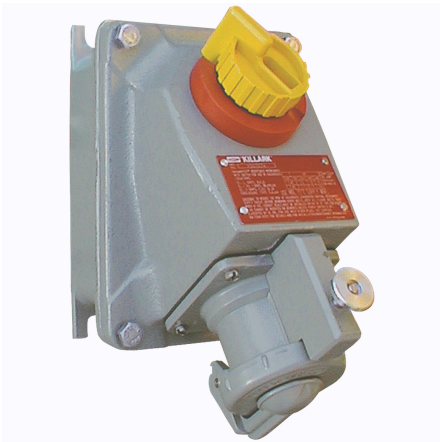

Features

- Compact size and footprint
- Plug Interlock Mechanism for Dead-Front construction. Switch cannot be turned "ON" without fully inserted plug. Plug cannot be removed with switch in "ON" position
- Factory Wired Receptacle (Load Side) "Off" position is padlockable for maintenance safety
- Auxiliary Contact (late-make early-break) contact rated 10 Amp, 1/3 HP at 125/250 VAC.
- Adjustable mounting lugs
- Feed-through construction
- Horsepower-rated internal switch

Specifications

Hazardous Rating(s)	<ul style="list-style-type: none"> • Class I, Divisions 1 & 2, Groups B, C, D • Class I, Zones 1 & 2, Groups IIB+H2, IIA • Class II, Divisions 1 & 2, Groups F, G • Class III, Divisions 1 & 2
EU RoHS Indicator	Contact Manufacturer
Nema Rating	3, 4, 4X, 7(B, C, D), 9(F, G)

Conductor

Number Of Wires	4
Number Of Poles	3

Configuration

Hub Pattern	Feed-Thru
-------------	-----------

Current

Amperage Rating	30 A
Voltage Rating	Up to 600 V

Dimensions

Hub Size	1"
Weight	13.31 lb.

General

Receptacle Type	Mechanically Interlocked
Type	Pin & Sleeve
Series	VSQ Series
Material	Aluminum
UPC	783936833323
Style	3 Pole, 4-Wire
Color	Battleship Gray

Product Assets

[Installation Manual \[English\]](#)