




VWSQ Series 60A 3P 4W NEMA 4X Mechanically Interlocked Receptacle

By Killark

Catalog # [VWSQ6034](#)

60A 3W4P NEMA 4X Mechanically Interlocked Receptacle

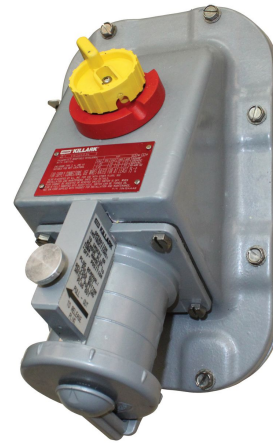

Features

- Compact size and footprint
- Plug Interlock Mechanism for Dead-Front construction. Switch cannot be turned "ON" without fully inserted plug. Plug cannot be removed with switch in "ON" position
- Factory Wired Receptacle (Load Side)
- "Off" position is padlockable for maintenance safety
- Auxiliary Contact (late-make early-break) rated 10 Amp, 1/3 HP at 125/250 VAC.
- Adjustable mounting lugs
- Feed-through construction
- Horsepower-rated internal switch

Specifications

EU RoHS Indicator	Contact Manufacturer
Nema Rating	3, 4, 4X, 7(B, C, D), 9(F, G)

Conductor

Number Of Wires	4
Number Of Poles	3

Configuration

Hub Pattern	Feed-Thru
-------------	-----------

Current

Amperage Rating	60 A
-----------------	------

Dimensions

Hub Size	1"
Weight	27.46 lb.

General

Receptacle Type	Mechanically Interlocked
Type	Pin & Sleeve
Series	VWSQ Series
Material	Aluminum, Copper Free (less than 4/10 of 1%)
UPC	783936833422

Logistics

Carton Quantity	1
-----------------	---