

THIS COPY IS PROVIDED ON	A RESTRICTED BASIS AND IS NOT TO BE U	SED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.
Material	High Conductivity	63

Material	High Conductivity Seamless Copper Tube			
Coating	Clear Coating			
Wire Size	4/0 AWG			
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric			
Wire Strip Length	1-5/8 in.			
Stud Size	1/2 in.			
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.			
	UL Listed per UL467 for grounding and bonding and suitable for direct burial in earth or concrete.			
UL Temperature Rating	90° C			
C.S.A Certified Wire Connector	N/A			
Panduit Color Code on Barrel	PURPLE			
Panduit Die Index No. on Barrel	P54			
Alternate Industry Die Index No. () on Barrel	(15)			



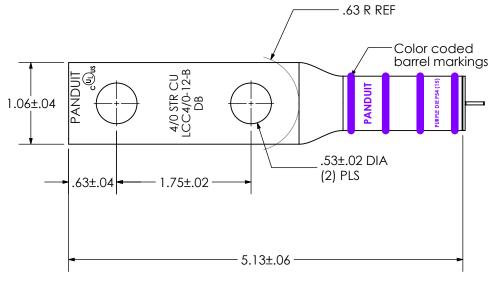

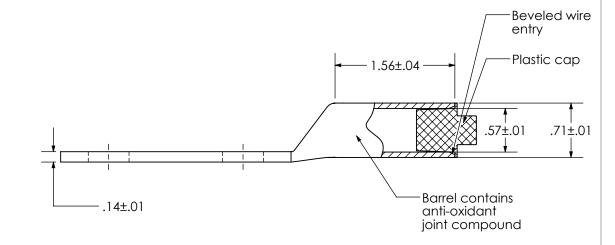

 $\begin{array}{c} \mathbf{DB} \stackrel{\bot}{=} \\ \mathbf{RATED} \end{array}$

								CORP. TINLEY PARK, ILLINOIS
								LCC4/0-12-B-X
00	3/16	JHNU	RGB	DRAWING RELEASED	00076FBE- LCC4/0-12-B-CUST	RGB	RGB	Copper Lug - Two-Hole, Long Barrel, Direct Burial
REV	DATE	BY	СНК	DESCRIPTION	ECN	-R	SUP	SCALE N/A DRAWING NO / CAD FILE LCC4_0-12-B-CUST