

PANDUIT P/N	WEIGHT
P12B01M	1.1kg

**NOTES:**

**1. IDENTIFICATION:**


UNIT TYPE:	BASIC
ORIENTATION:	HORIZONTAL, 1U
OUTLET QTY&TYPE:	(12) NEMA 5-20R
BREAKER QTY&TYPE:	N/A
INPUT VOLTAGE:	100-120V
INPUT CURRENT:	16A
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	1.9kVA
INPUT PLUG:	NEMA 5-15P
INPUT CORD LENGTH:	3m [10']

**2. ACCESSORIES:**


- POCKET GUIDE
- QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS
- QTY: (4) M6 CAGED NUT

**3. RoHS COMPLIANT**


- 4. VISIT PANDUIT'S ON-LINE CATALOG AT [WWW.PANDUIT.COM](http://WWW.PANDUIT.COM) FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- 5. MAXIMUM ALLOWABLE INPUT POWER = 1.9 kW
- 6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

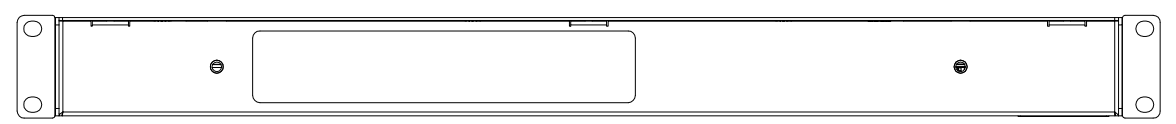


REAR VIEW

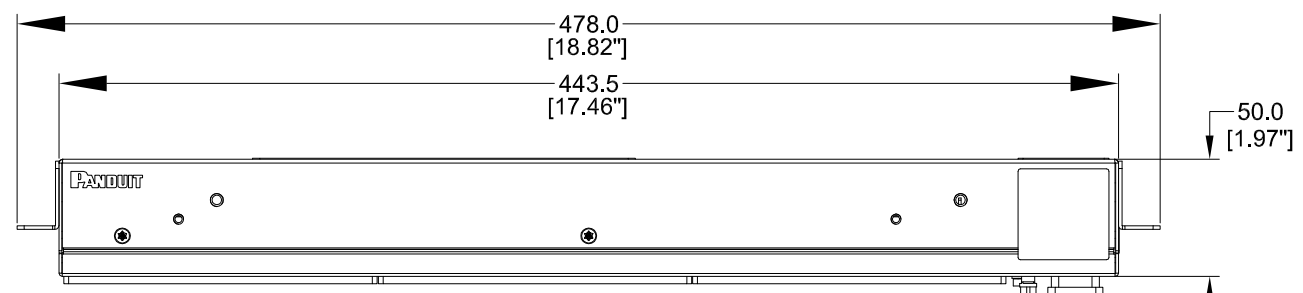


TOP VIEW

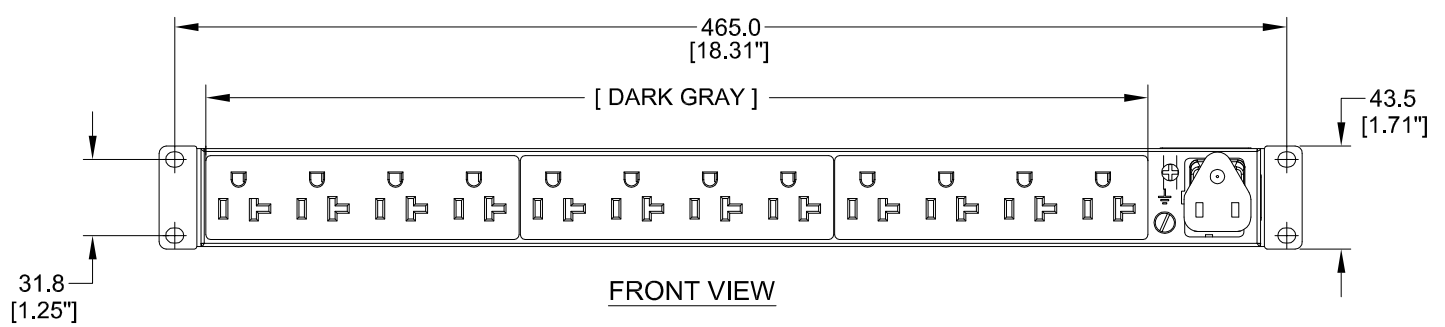

FRONT VIEW

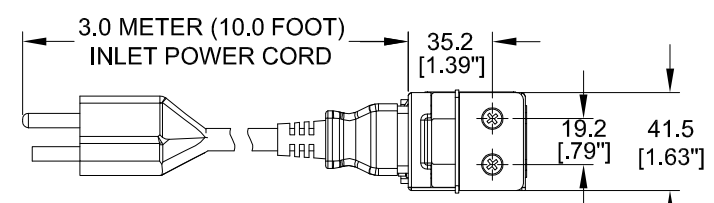

SIDE VIEW

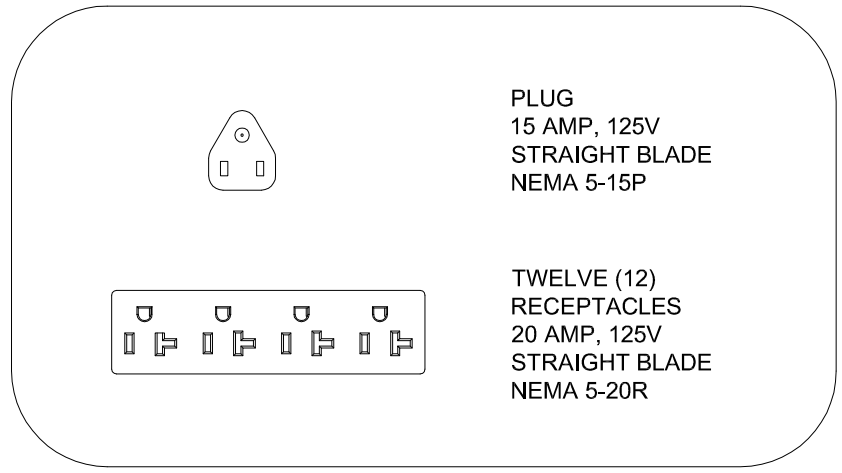

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

SIGN \_\_\_\_\_  
DATE \_\_\_\_\_  
PRINT \_\_\_\_\_

TITLE: BASIC SERIES PDU  
P12B01M  
CUSTOMER DRAWING

ITEM REVISION NAME: \_\_\_\_\_  
DATASHEET FILE NAME: \_\_\_\_\_

UNLESS OTHERWISE SPECIFIED  
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)  
0<1<200 ±0.5  
200<1<500 ±1.5  
500<1<1000 ±2.5  
1000<1<2000 ±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR: N/A

DRAWING NUMBER: P12B01M\_DC

DRAWN BY: KUN DATE: 05/24/2017 CHK: SEAN SCALE: NONE

SHT 1 OF 1 SCALE: B