



Small, general purpose lighting that's pocket friendly.

Color: Bronze

Weight: 0.7 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

### Driver Info

|             |                  |
|-------------|------------------|
| Type        | Constant Current |
| 120V        | N/A              |
| 208V        | N/A              |
| 240V        | N/A              |
| 277V        | 0.1A             |
| Input Watts | 14.8W            |

### LED Info

|                |              |
|----------------|--------------|
| Watts          | 15W          |
| Color Temp     | 3000K (Warm) |
| Color Accuracy | 83 CRI       |
| L70 Lifespan   | 50,000       |
| Lumens         | 1,585        |
| Efficacy       | 107.1 lm/W   |

## Technical Specifications

### Listings

#### UL Listed:

Suitable for wet locations. Suitable for ground mounting.

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. DLC Product Code: PKRRFQHT

### Electrical

#### Driver:

Constant Current, 277V, 60 Hz, 277V: 0.055A

#### THD:

19.6% at 277V

#### Power Factor:

98.1% at 277V

#### Surge Protection:

2kV

#### Note:

All values are typical (tolerance +/- 10%)

### Optical

#### NEMA Type:

NEMA Beam Spread of 7H x 7V

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

#### Lifespan:

50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Construction

#### IP Rating:

Ingress Protection rating of IP65 for dust and water

#### Cold Weather Starting:

Minimum starting temperature is -40°C (-40°F)

## Technical Specifications (continued)

### Construction

#### Maximum Ambient Temperature:

Suitable for use in 40°C (104°F)

#### Housing:

Die-cast aluminum

#### Mounting:

Robust knuckle mount with 180° adjustable swivel arm. Tilt angle in 10° increments.

#### Lens:

Tempered glass

#### Finish:

Formulated for high durability and long-lasting color

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

### Other

#### Equivalency:

Equivalent to 50W Metal Halide


#### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

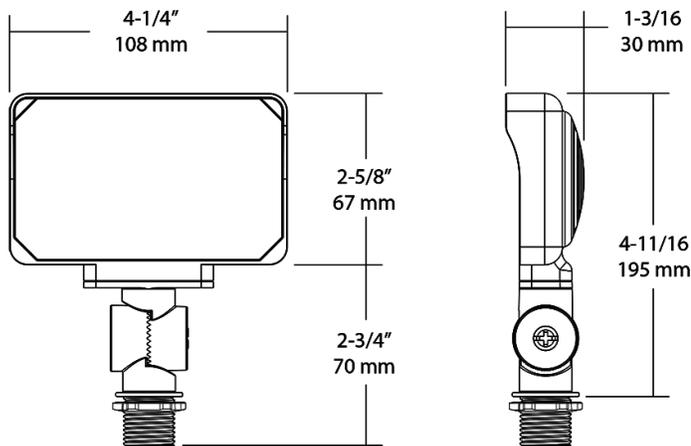

## Features

- General purpose floodlight
- Very wide 7H x 7V NEMA distribution
- Low profile and lightweight
- IP65 rating protects against dust and water

## Ordering Matrix

| Family | Lumen Packages (values are nominal)  | Mounting              | CRI/Color Temp                                | Driver/Voltage             |
|--------|--|-----------------------|---|----------------------------|
| X34    | - 16L  | -                     | -830  | /277                       |
|        | 16L = 1600 Lumens, 15W<br>25L = 2500 Lumens, 25W<br>35L = 3500 Lumens, 35W<br>55L = 5500 Lumens, 55W<br>65L = 6500 Lumens, 64W | Blank = Knuckle Mount | Blank = 80 CRI, 5000K<br>-830 = 80 CRI, 3000K | /120 = 120V<br>/277 = 277V |