

A100P

Amp-Trap® Form 101

HIGH SPEED FUSES



A100P Amp-Trap® Form 101 high speed fuses are rated 1000V, extending the range of protection for UPS systems, AC and DC drives, reduced voltage motor starters and similar applications where lower I²t and superior reliability are needed. With ratings from 15 through 1000 amperes, a wide range of high voltage applications can be served.

FEATURES/BENEFITS

- Low I²t minimizes damage to protected components on short circuit
- Controlled arc voltage reduces stress to circuit components during fuse clearing
- Wide range of ampere ratings

Catalog Numbering System					
A	100	P	80	- 4	TI
Amp-Trap® Fuse	Rated Voltage - 1000	Style	Amperes*	Mounting Types*	Integral Blown-Fuse Indicator
				Ferrule: 1 Blades, bolt-in: 4	Trigger Indicator: TI

* For ampere ratings and styles not listed, call Technical Services at 978-248-8914.

RATINGS

- **Volts:** 1000VAC, 750VDC
- **Amps:** 15 to 1000A
- **I.R.:** 100kA I.R.
- **L/R:** 25ms

HIGHLIGHTS

- Fast acting
- Current limiting
- Low I²t
- Optional trigger indicator

APPLICATIONS

- Protection of UPS systems
AC/DC drives, reduced
voltage motor starters
and other 1000V or less
semiconductor devices

APPROVALS/STANDARDS

- UL recognized component
File E60314
- AC: UL guide no. JFHR2
(35-600A)
- DC: self-certified



SINGLE POLE FUSE BLOCKS FOR A100P FUSES

Fuse Ampere Rating	Catalog No.	
35-100	P266G	
125-400	P266L	

Mersen products have been designed by Mersen for a range of specific applications to be operated depending on particular specification and conditions. Mersen makes no representation or/and warranty, and waives any liability, either express or implied, for products' reliability and life time or technical performance in case Mersen has not been provided with customer's specifications or if the products are not purchased directly from Mersen or its distributors and/or agents.

CATALOG NUMBERS (AMPS)

Catalog No.	Dimen. Fig.	Catalog No.	Dimen. Fig.	Catalog No.	Dimen. Fig.	Catalog No.	Dimen. Fig.
A100P15-1	1	A100P70-4TI	2	A100P200-4TI	2	A100P500-4TI	3
A100P20-1	1	A100P80-4	2	A100P225-4	2	A100P600-4	3
A100P25-1	1	A100P80-4TI	2	A100P250-4	2	A100P600-4TI	3
A100P30-1	1	A100P100-4	2	A100P300-4	2	A100P650-4	4
A100P35-4	2	A100P100-4TI	2	A100P300-4TI	2	A100P700-4	4
A100P40-4	2	A100P125-4	2	A100P350-4	2	A100P800-4	4
A100P50-4	2	A100P125-4TI	2	A100P350-4TI	2	A100P800-4TI	4
A100P50-4TI	2	A100P150-4	2	A100P400-4	2	A100P1000-4	5
A100P60-4	2	A100P150-4TI	2	A100P400-4TI	2		
A100P60-4TI	2	A100P200-4	2	A100P500-4	3		

* For ampere ratings and styles not listed, call Technical Services at 978-248-8914.

DIMENSIONS

Catalog Number Range	Mounting Type	Fig.	Dimensions - Inches (mm)									
			A	B	C	D	E	F	G	H	J	
A100P15 to 30	1	1	2.63 [66.8]	0.56 [14.2]	-	-	-	-	-	-	-	-
A100P35 to 60	4, 4TI	2	5.00 [127]	1.00 [25.4]	3.50 [88.9]	4.31 [109]	4.19 [106]	0.31 [7.9]	0.75 [19.1]	0.13 [3.3]	-	-
A100P65 to 100	4, 4TI	2	5.00 [127]	1.22 [31.0]	3.50 [88.9]	4.31 [109]	4.19 [106]	0.31 [7.9]	1.00 [25.4]	0.19 [4.8]	-	-
A100P125 to 200	4, 4TI	2	5.72 [145]	1.50 [38.1]	3.47 [88.1]	4.78 [121]	4.16 [106]	0.41 [10.4]	1.00 [25.4]	0.25 [6.4]	-	-
A100P225 to 400	4, 4TI	2	5.72 [145]	2.00 [50.8]	3.47 [88.1]	4.78 [121]	4.16 [106]	0.41 [10.4]	1.50 [38.1]	0.25 [6.4]	-	-
A100P500 to 600	4, 4TI	3	7.72 [196]	2.50 [63.5]	3.47 [88.1]	5.88 [149]	5.56 [141]	0.53 [13.5]	2.00 [50.8]	0.38 [9.7]	-	-
A100P650 to 800	4, 4TI	4	7.44 [189]	2.88 [73.2]	3.94 [100]	5.94 [151]	-	0.63 [16.0]	2.00 [50.8]	0.38 [9.7]	-	-
A100P1000	4	5	8.22 [209]	3.38 [85.9]	4.47 [114]	6.59 [167]	5.84 [148]	0.63 [16.0]	2.75 [69.9]	0.50 [12.7]	1.38 [35.1]	-




Figure 1




Figure 2

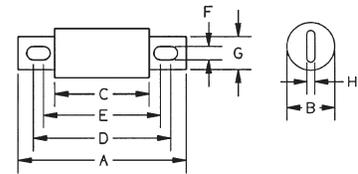


Figure 3

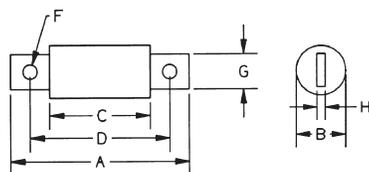


Figure 4




Figure 5

Mersen products have been designed by Mersen for a range of specific applications to be operated depending on particular specification and conditions. Mersen makes no representation or/and warranty, and waives any liability, either express or implied for products' reliability and life time or technical performance in case Mersen has not been provided with customer's specifications or if the products are not purchased directly from Mersen or its distributors and/or agents.