
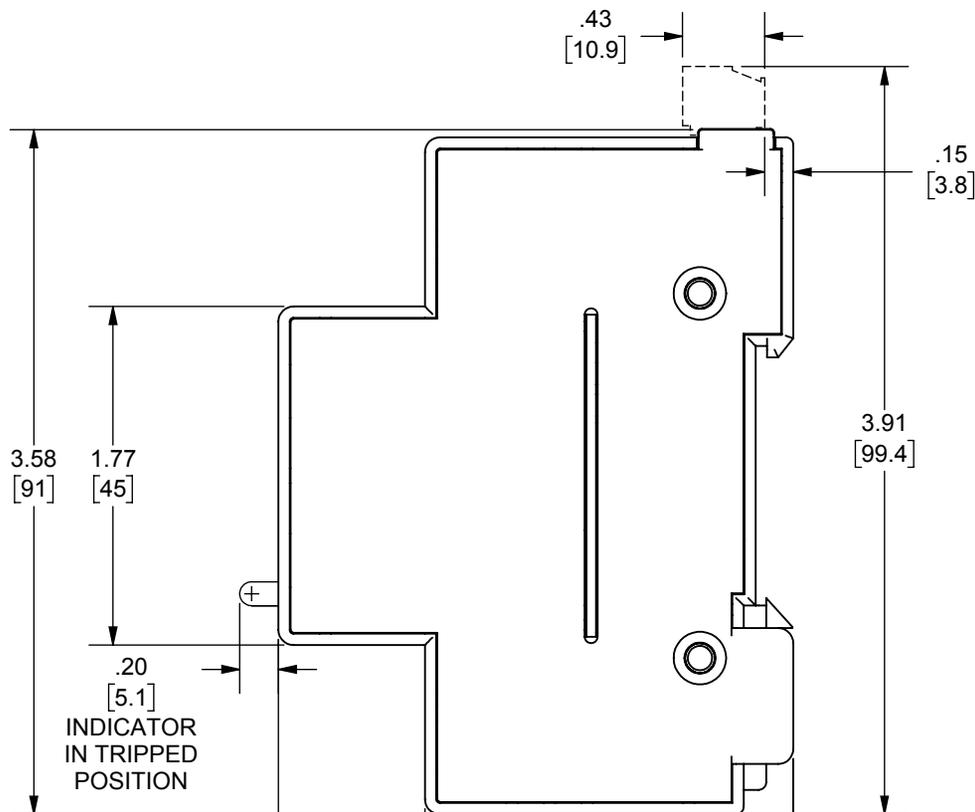


REV.	DATE	ECO	DESCRIPTION	BY	CK	APP
D	2/3/2021	N/A	REDRAWN	GDR	N/A	N/A

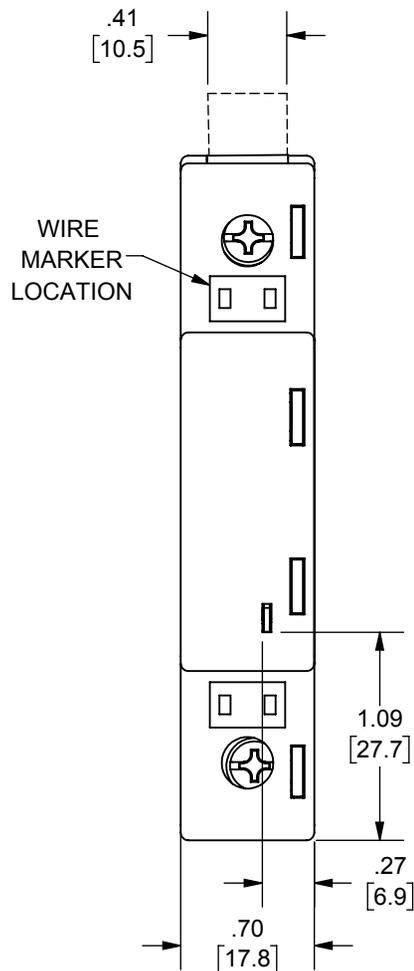

INDICATOR
IN TRIPPED
POSITION

REMOTE INDICATIONG SPECIFICATION

- ** 125VAC 3A DRY CONTACT
- ** TERMINAL SPACING 3.5mm
- ** WIRE SIZE: 16-30 AWG

PIN CONNECTORS: 1-NORMALLY OPEN
2-NORMALLY CLOSE
3-COMMON

- ** UL FILE #210793
- ** WIRE SIZE: 6/14 AWG
- ** TORQUE: 14.75 LBS-IN
- ** USE 35mm DIN RAIL

DIMENSIONS IN [] ARE MILLIMETERS



MERSEN USA NEWBURYPORT-MA, LLC
374 MERRIMAC STREET
NEWBURYPORT, MA 01950

ST(120,230,277,480)1PG, 1PGM

SURGE TRAP

MAX 8/20 50kA

OUTLINE DIMENSIONS
NOT TO BE USED FOR PRODUCTION

701188

PRODUCT MANAGER

SIGN: M.SAWYER

DATE: 2/4/2021

DESIGN ENGINEER

SIGN: G.BENTO

DATE: 2/4/2021