CONTROL No: 2237

REV.	DATE	ECO	DESCRIPTION	BY	CK	APP
C	2/4/2021	N/A	REDRAWN	GDR	N/A	N/A

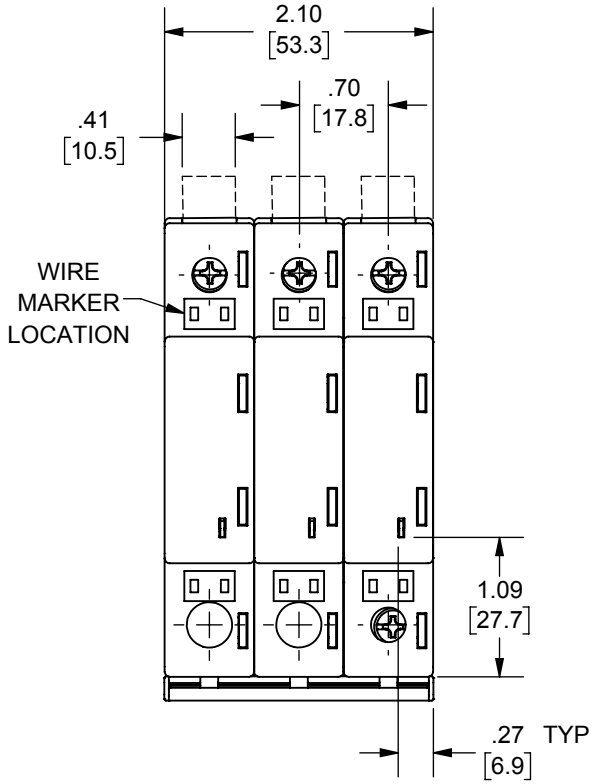

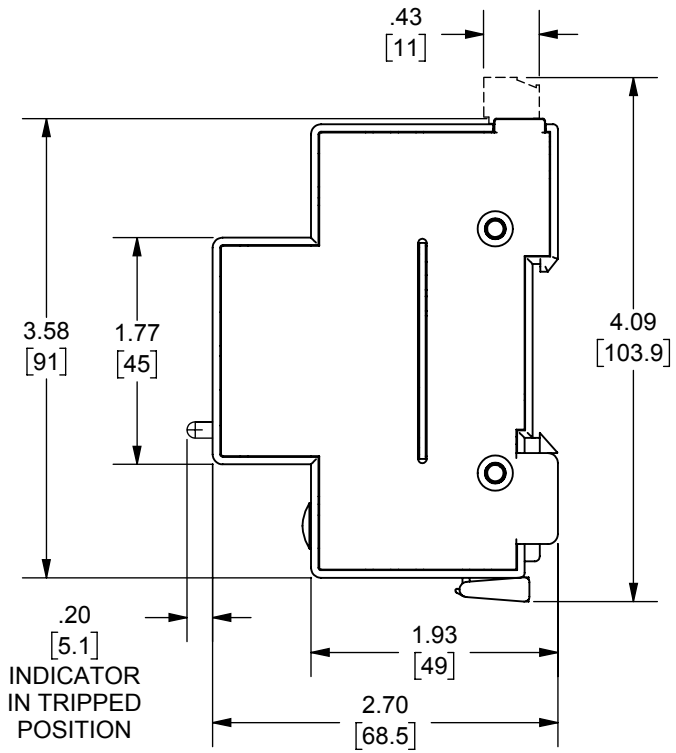

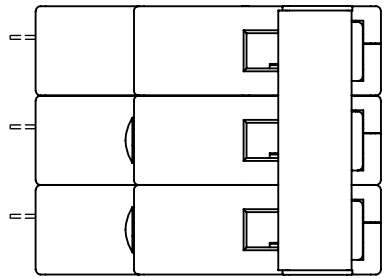

REMOTE INDICATIONG SPECIFICATION

** 125VAC 3A DRY CONTACT
** TERMINAL SPACING 3.5mm
** WIRE SIZE: 16-30 AWG

PIN CONNECTORS: 1-NORMALLY OPEN
2-NORMALLY CLOSE
3-COMMON

** UL FILE #210793
** WIRE SIZE: 6/14 AWG
** TORQUE: 14.75 LBS-IN
** USE 35mm DIN RAIL

DIMENSIONS IN [ ] ARE MILLIMETERS

MERSEN

MERSEN USA NEWBURYPORT-MA, LLC
374 MERRIMAC STREET
NEWBURYPORT,MA 01950

PRODUCT MANAGER
SIGN: M.SAWYER
DATE: 2/4/2021

DESIGN ENGINEER
SIGN: G.BENTO
DATE: 2/4/2021

ST(208,480,600,690)3PYG, 3PYGM
ST(240,480)3PDG, 3PDGM
SURGE TRAP

MAX 8/20 50kA

OUTLINE DIMENSIONS
NOT TO BE USED FOR PRODUCTION

701190

SHEET 1 OF 1