

Applications:

EMH instrument housings are used:

- To enclose 2½" or 3½" diameter round, flush rim mounting meters, whose scale or dial would be visible in the 2½" diameter glass window; typical types of instruments or meters are ammeters, voltmeters, etc.
- In specific hazardous atmospheres such as encountered in oil refineries, chemical plants, paint and varnish manufacturing plants, certain hazardous metal finishing areas, coal processing locations, granaries and grain processing plants

Features:

- Sight glass in cover permits viewing of instrument dial or setting
- Enclosures are non-magnetic, available in surface mounting and flush panel mounting. The cylindrical extension of the cover opening on the flush bodies will project through a hole in panel. Thickness of panel must not exceed ¼" to ensure flamtight assembly of cover threads with body threads.
- Mounting plates and posts in bodies support the instrument close to the heavy glass window in cover. Maximum depth of instrument extending from outboard end of posts toward the back wall of enclosure body is 3". There is ample wiring space in back of instruments.
- Bodies have bosses on all four sides and back for drilling and tapping of conduit entrances
- Dead end and through feed arrangements for ¾" rigid conduit are standard listings

Certifications and compliances:

NEC/CEC:

- Class I, Divisions 1 & 2, Group D
- Class II, Division 1, Groups E, F, G
- Class II, Division 2, Groups F, G
- Class III

UL standard:

- UL1203

CSA standard:

- C22.2 No. 30

Environmental ratings:

- NEMA/EEMAC 3, 7D, 9EFG, 12

Standard materials:

- Bodies and covers – copper-free aluminum
- Windows – heat strengthened plate glass

Standard finish:

- Natural

Options:

- Other conduit hub sizes and arrangements can be furnished

Ordering information:

Style	Conduit openings	Size	Cat. #
Surface	One in side (dead end)	¾"	EMH521 20000
	Two in sides (through feed)		EMH533 20000
			EMH521 20200
Flush	One in side (dead end)	¾"	EMH533 20200
	Two in sides (through feed)		EMH511 20000
			EMH534 20000
			EMH511 20200
			EMH534 20200

Standard meters:


(Housed in EMH511, EMH521^A)

Manufacturer	Model	Size	
Weston	201 series	2½	
	301 series	3½	
	Westinghouse	N-351 series	3½
		125 series	2½
		135 series	
145 series			
155 series			
Simpson	25 series	3½	
	35 series		
	45 series		
	55 series		
	75 series		
	3222 series		2½
	3282 series		
	3223 series		3½
	3283 series		

(Housed in EMH533, EMH534)

Manufacturer	Model	Size	Type
General Electric	AW-91 series	2½	Rectangular flush
	DW-91 series		
Weston	201 series	2½	Square flush
	1721 series		Rectangular flush

Dimensions^B (in inches):

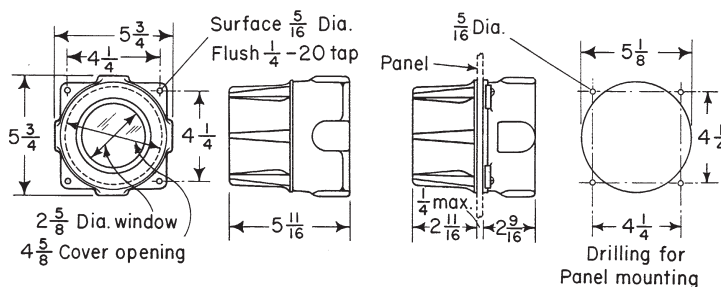

Flush



Surface

^AType: round flush.

^BDimensions are approximate, not for construction purposes.