


# YAV18T1, Uninsulated Ring Terminal For 22 - 18 AWG

By Burndy  
Catalog # YAV18T1

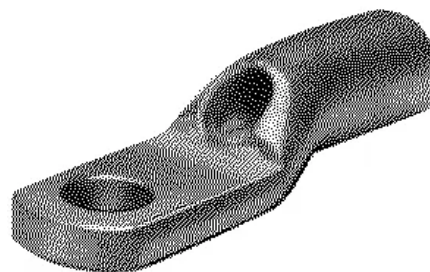

Uninsulated Ring Terminal For 22 - 18 AWG.

## Features

- Manufactured from seamless pure electrolytic copper tubing to provide maximum conductivity, low resistance and excellent ductility for crimping
- Seamless tubular crimp barrel design - No seams to split resulting in a very high quality electrical connection, also can be used on solid conductor
- Double thick tongue structurally a very strong terminal tongue
- Produced from tubular copper, extra copper material assures the compression connector will operate cooler than the conductors it connects
- Internally bevelled barrel for easy cable entry, especially for flexible conductors
- Inspection hole provides easy visual check for proper conductor insertion
- Electro-tin plated for a long lasting durable corrosion resistance

## Application

For Use On Copper Commercial (Code) Cable, Type AN Aircraft Cable And Extra Flexible Conductors, Industrials, Hospitals, Electric Utilities, Shipboard And Marine, Computers, Steel Mills, Mining Equipment And Other Equipment That Is Subject To Vibration Or Requiring Dependable Electrical Performance

## General

Catalog Number	YAV18T1
Connector Type	Ring Terminal
EU RoHS Indicator	Yes
Feature - Barrel Style	Chamfered
Feature - Barrel Type	Standard
Material	Copper
Physical Attribute - Number of Holes	1
Physical Attribute - Tongue Type	Ring
Plated	Y
Plating Type	Tin - Electro Plated
Sub Brand	HYLUG
Trade Name	HYLUG™
Type	Ring Tongue
UPC	781810025352

UPC 14 Digit GTIN

00781810025352

## Dimensions

Dimension - B Length fraction	1/4 in
Dimension - B Length inch	0.21 in
Dimension - Bolt Size fraction	#6 - #8
Dimension - D inch	0.42 in
Dimension - Hole Size fraction	1/6
Dimension - Hole Size inch	0.17 in
Dimension - Hole Size mm	4 mm
Dimension - Length Overall inch	0.76 in
Dimension - N inch	0.16 in
Dimension - Outside Diameter inch	0.13 in
Dimension - Pad Width inch	0.31 in
Dimension - Stud Size inch	#6;#8

## Conductor Related

Conductor - Copper DLO Size Range	N/A
Conductor - Copper Solid Size Range	20;18
Conductor - Copper Str Aircraft Size	AN 22;AN 20;AN 18
Conductor - Copper Str Navy Size	1 (1);1 (7);1 (10);1 1/2 (1);1 1/2 (7);1 1/2 (16);1 1/2 (41);2 (7)
Conductor - Copper Str Size Range	20;18
Conductor - Copper Str Size Range	20 AWG - 18 AWG
Conductor Size	22 - 18 AWG
Conductor Type	<ul style="list-style-type: none"> <li>• CU C Solid-Size</li> <li>• CU C Str-Size</li> </ul>

## Certifications And Compliance

Buy America(n) Qualified	Contact Manufacturer
Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Industry Standard(s)	UL467
Standards - Industry Standards Met	UL486

Standards - RoHS Compliance CM  
Status  
UL Listed Yes

[3D Models - YAV18T1\\_MODEL-PDF](#)  
[3D Models - YAV18T1\\_MODEL-IGES](#)  
[3D Models - YAV18T1\\_MODEL-STEP](#)  
[Catalogs - BURNDY Master Catalog - Section B - Small Terminals](#)  
[Catalogs - BURNDY Master Catalog - Full Line BURNDY Catalog](#)  
[Interactive Catalog - BURNDY Full-Line Digital Catalog](#)  
[Product Cross Section Image\(s\) - BUR\\_YAV18T5\\_LineArt](#)  
[Sales Drawings - 50094160](#)  
[Specifications - YAV18T1](#)

### Logistics

Carton Quantity 1000  
Minimum Pack Quantity 1000  
Pallet Quantity 99999

### Product Assets



A Hubbell brand

©2025 Hubbell Incorporated. All rights reserved  
BRDY-YAV18T1-SPEC-EN | REV 7/2025